


1


## Starting Soon: LNAPLs Training – Part 1 of 3



Poll Question

- ▶ Light Non-Aqueous Phase Liquid (LNAPL) Site Management: LCSM Evolution, Decision Process, and Remedial Technologies (LNAPL-3, 2018) - <https://lnapl-3.itrcweb.org/>
- ▶ Download PowerPoint file
  - Clu-in training page at <http://www.clu-in.org/conf/itrc/lnapl-3/>
  - Under “Download Training Materials”
- ▶ Download information for reference during class
  - [Figure 1.1 \(from the LNAPL-3 guidance document\)](#)
- ▶ Using Adobe Connect
  - Related Links (on right)
    - Select name of link
    - Click “Browse To”
  - Full Screen button near top of page

▶ Follow ITRC



POLL Question:

What is your role in LNAPL Site Management? (Select all that apply)

- A. State or Federal Regulator
- B. Consultant
- C. Policy maker
- D. Site Owner
- E. Technology Vendor
- F. Community Stakeholder
- G. Other

## Welcome – Thanks for Joining this ITRC Training Class



Based on ITRC Guidance Document:  
 Light Non-Aqueous Phase Liquid (LNAPL) Site Management: LCSM  
 Evolution, Decision Process, and Remedial Technologies (LNAPL-3, 2018)  
**3-Part Training Series: Connecting the Science to Managing Sites**



**Part 1: Understanding LNAPL Behavior in the Subsurface**

**Part 2: LNAPL Conceptual Site Models and the LNAPL Decision Process**

**Part 3: Using LNAPL Science, the LCSM, and LNAPL Goals to Select an LNAPL Remedial Technology**

Sponsored by: Interstate Technology and Regulatory Council ([www.itrcweb.org](http://www.itrcweb.org))  
 Hosted by: USEPA Clean Up Information Network ([www.cluin.org](http://www.cluin.org))

### Connecting the Science to Managing LNAPL Sites – 3 Part Series

The newly updated LNAPLs (Light Non-Aqueous Phase Liquids) 3-part training course series is based on the ITRC guidance: [LNAPL Site Management: LCSM Evolution, Decision Process, and Remedial Technologies](#) (LNAPL-3, 2018) and focuses on connecting the science to managing LNAPL sites and helping you:

- Build upon your Understanding of LNAPL Behavior in the Subsurface (Part 1)
- Develop your LNAPL Conceptual Site Model and LNAPL Remedial Goals (Part 2)
- Select/Implement LNAPL Technologies (Part 3)

After this training series, the expectation is that you will have the skills and understanding to use ITRC science-based resources to improve decision making at your LNAPL sites. For regulators and other government agency staff, this improved understanding can hopefully be incorporated into your own LNAPL programs.

It is recommended that participants have a general understanding of hydrogeology and some familiarity with petroleum contaminated sites. The courses will build on your existing LNAPL knowledge and outline the framework for making LNAPL remediation and management decisions. It is expected that participants will attend this 3-part training series in sequence.

#### LNAPL Training Part 1: Understanding LNAPL Behavior in the Subsurface

Part 1 teaches how LNAPLs behave in the subsurface and examines what controls their behavior. Part 1:

- Explains what LNAPL data can tell you about the LNAPL and site conditions
- Covers how that information is applied to the development of an LNAPL conceptual site model (LCSM) (Part 2) and LNAPL technology selection (Part 3)

Relevant and practical examples are used to illustrate key concepts.

#### LNAPL Training Part 2: LNAPL Conceptual Site Models and the LNAPL Decision Process

Part 2 teaches participants how to develop an LNAPL conceptual site model (LCSM) and the overall framework for making LNAPL remediation and management decisions. Part 2:

- Discusses key LNAPL and site data
- Explains when and why those data may be important
- Covers how to effectively organize the data into an LCSM

Part 2 also discusses how to address LNAPL concerns by selecting appropriate goals and objectives, choosing applicable technologies, and assigning remedial performance metrics and endpoints.

#### LNAPL Training Part 3: Using LNAPL Science, the LCSM, and LNAPL Goals to Select an LNAPL Remedial Technology

Part 3 of the training teaches the importance of informed remedial technology selection and appropriate technology application. Part 3:

- Discusses remedial technology groups
- Introduces specific and new remedial technologies
- Reviews the technology selection process, how technologies can be combined to accelerate cleanup, and how the LCSM informs selection

A case study and examples demonstrate the use of these tools for remedial technology selection, implementation, and demonstration of successful remediation.

Training participants are encouraged to view the associated ITRC guidance, [LNAPL Site Management: LCSM Evolution, Decision Process, and Remedial Technologies](#) (LNAPL-3, 2018), prior to attending the class.

ITRC (Interstate Technology and Regulatory Council) [www.itrcweb.org](http://www.itrcweb.org)

Training Co-Sponsored by: US EPA Technology Innovation and Field Services Division (TIFSD) ([www.clu-in.org](http://www.clu-in.org)) ITRC Training Program: [training@itrcweb.org](mailto:training@itrcweb.org); Phone: 402-201-2419

## Housekeeping



- ▶ Course time is 2¼ hours
- ▶ This event is being recorded
- ▶ Trainers control slides
  - **Want to control your own slides?** You can download presentation file on Clu-in training page
- ▶ Questions and feedback
  - **Throughout training:** type in the “Q & A” box
  - **At Q&A breaks:** unmute your phone with #6 to ask out loud
  - **At end of class:** Feedback form available from last slide
    - **Need confirmation of your participation today?** Fill out the feedback form and check box for confirmation email and certificate

Copyright 2018 Interstate Technology & Regulatory Council,  
50 F Street, NW, Suite 350, Washington, DC 20001

### Notes:

We have started the seminar with all phone lines muted to prevent background noise. Please keep your phone lines muted during the seminar to minimize disruption and background noise. During the question and answer break, press #6 to unmute your lines to ask a question (note: \*6 to mute again). Also, please do NOT put this call on hold as this may bring unwanted background music over the lines and interrupt the seminar.

Use the “Q&A” box to ask questions, make comments, or report technical problems any time. For questions and comments provided out loud, please hold until the designated Q&A breaks.

**Everyone** – please complete the feedback form before you leave the training website. Link to feedback form is available on last slide.

## ITRC ([www.itrcweb.org](http://www.itrcweb.org)) – Shaping the Future of Regulatory Acceptance



### ► Host organization

### ► Network

- State regulators
  - All 50 states, PR, DC
- Federal partners



### • ITRC Industry Affiliates Program



- Academia
- Community stakeholders

### ► Follow ITRC



### ► Disclaimer

- Full version in “Notes” section
- Partially funded by the U.S. government
  - ITRC nor US government warranty material
  - ITRC nor US government endorse specific products
- ITRC materials available for your use – see [usage policy](#)
- Available from [www.itrcweb.org](http://www.itrcweb.org)
  - Technical and regulatory guidance documents
  - Online and classroom training schedule
  - More...

The Interstate Technology and Regulatory Council (ITRC) is a state-led coalition of regulators, industry experts, citizen stakeholders, academia and federal partners that work to achieve regulatory acceptance of environmental technologies and innovative approaches. ITRC consists of all 50 states (and Puerto Rico and the District of Columbia) that work to break down barriers and reduce compliance costs, making it easier to use new technologies and helping states maximize resources. ITRC brings together a diverse mix of environmental experts and stakeholders from both the public and private sectors to broaden and deepen technical knowledge and advance the regulatory acceptance of environmental technologies. Together, we're building the environmental community's ability to expedite quality decision making while protecting human health and the environment. With our network of organizations and individuals throughout the environmental community, ITRC is a unique catalyst for dialogue between regulators and the regulated community.

For a state to be a member of ITRC their environmental agency must designate a State Point of Contact. To find out who your State POC is check out the “contacts” section at [www.itrcweb.org](http://www.itrcweb.org). Also, click on “membership” to learn how you can become a member of an ITRC Technical Team.

**Disclaimer:** This material was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof and no official endorsement should be inferred.

The information provided in documents, training curricula, and other print or electronic materials created by the Interstate Technology and Regulatory Council (“ITRC” and such materials are referred to as “ITRC Materials”) is intended as a general reference to help regulators and others develop a consistent approach to their evaluation, regulatory approval, and deployment of environmental technologies. The information in ITRC Materials was formulated to be reliable and accurate. However, the information is provided “as is” and use of this information is at the users’ own risk.

ITRC Materials do not necessarily address all applicable health and safety risks and precautions with respect to particular materials, conditions, or procedures in specific applications of any technology. Consequently, ITRC recommends consulting applicable standards, laws, regulations, suppliers of materials, and material safety data sheets for information concerning safety and health risks and precautions and compliance with then-applicable laws and regulations. ITRC, ERIS and ECOS shall not be liable in the event of any conflict between information in ITRC Materials and such laws, regulations, and/or other ordinances. The content in ITRC Materials may be revised or withdrawn at any time without prior notice.

ITRC, ERIS, and ECOS make no representations or warranties, express or implied, with respect to information in ITRC Materials and specifically disclaim all warranties to the fullest extent permitted by law (including, but not limited to, merchantability or fitness for a particular purpose). ITRC, ERIS, and ECOS will not accept liability for damages of any kind that result from acting upon or using this information.

ITRC, ERIS, and ECOS do not endorse or recommend the use of specific technology or technology provider through ITRC Materials. Reference to technologies, products, or services offered by other parties does not constitute a guarantee by ITRC, ERIS, and ECOS of the quality or value of those technologies, products, or services. Information in ITRC Materials is for general reference only; it should not be construed as definitive guidance for any specific site and is not a substitute for consultation with qualified professional advisors.



## Meet the ITRC LNAPL Trainers – Part 1



**Randy Chapman**  
Virginia Department of  
Environmental Quality  
Woodbridge, Virginia  
703-583-3816  
randy.chapman  
@deq.virginia.gov



**Natasha Sihota**  
Chevron Energy  
Technology Company  
San Ramon, California  
925-842-5458  
NSihota@chevron.com



**Sanjay Garg**  
Shell Global Solutions  
(US) Inc.  
Houston, Texas  
281-544-9113  
sanjay.garg@shell.com



**Ian Hers**  
Golder Associates Ltd  
Burnaby, British  
Columbia, Canada  
604-298-6623  
ihers@golder.com

Read trainer bios at <https://clu-in.org/conf/itrc/LNAPL-3/>

**Randy Chapman** is an Environmental Manager for the Petroleum Remediation Program at the Virginia Department of Environmental Quality (DEQ) Northern Regional Office in Woodbridge, Virginia. Randy has worked in the Tanks and Remediation Section since 1993 when he was hired as a Remediation Geologist. In 2015, Randy became manager of the Section. He currently oversees release investigations, environmental assessments, corrective actions, and closure of petroleum impacted sites as well as the Compliance and Enforcement activities associated with regulated petroleum UST and AST inspections. Randy has been actively involved in the development and implementation of numerous program guidance, including the issuance of the Virginia DEQ 2012 Case Closure Evaluation of Sites with Free Product guidance. Randy has presented at numerous technical conferences. Randy has been active in the ITRC since 2012 serving on the ITRC Petroleum Vapor Intrusion (PVI) team. Prior to the VA DEQ, Randy worked for South Carolina DHEC between 1990 and 1993. Randy earned a bachelor's degree in geology from Clemson University in Clemson South Carolina in 1988.

**Sanjay Garg** is a consultant within Shell Global Solutions in Houston, Texas, which provides technical expertise to Shell's global operations. He has been employed with Shell Oil Company and its subsidiary companies since 1999. Sanjay provides technical support on underground fate-and-transport of hydrocarbons including LNAPL management to various Shell businesses. He routinely provides training inside and outside Shell on several topics including LNAPL. Prior to Shell he was a Postdoctoral fellow and a Faculty Fellow at Rice University during 1999. He has been active in the ITRC LNAPL team since 2007. Sanjay earned an undergraduate degree in Civil Engineering from Gulbarga University in India in 1988 and a Ph.D. in Environmental Engineering from the University of Houston, Houston, Texas in 1998.


**Natasha Sihota** is an Environmental Hydrogeologist with the Site Assessment and Remediation team of Chevron's Energy Technology Company in San Ramon, California. She provides technical guidance for domestic and international hydrocarbon remediation projects and supports internal technology research and development for site assessment and remediation tools. Natasha developed the surficial CO<sub>2</sub> efflux approach for evaluating NAPL management through natural source zone depletion (NSZD). She has extensive experience with applying the NSZD concept to achieve different site management objectives. Natasha has been involved in developing guidance documents in the US for evaluating and applying the NSZD concept through the American Petroleum Association, ITRC, and other state groups. She has provided NSZD training to environmental regulators, industry colleagues, and university groups. Natasha earned a bachelor's degree in hydrogeology, ecology and environmental chemistry from the University of British Columbia, Canada in 2009 and a Ph.D. in contaminant hydrogeology in 2014.

## Our Focus is on LNAPL (Light Non-Aqueous Phase Liquid)



- ▶ What is LNAPL?
- ▶ Why Do We Care About LNAPL?
  - LNAPL Concerns
  - LNAPL can be difficult to accurately assess or recover
- ▶ Use LNAPL science to your advantage and apply at your sites

Light Non Aqueous Phase Liquids (LNAPL)

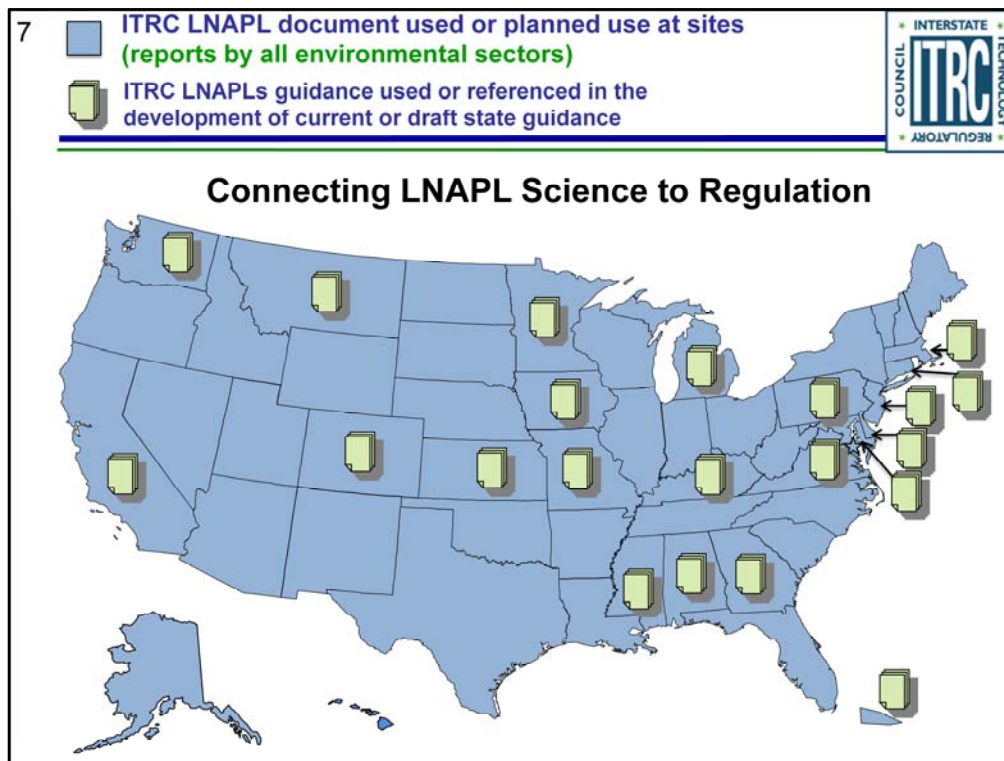

We have documented use of ITRC LNAPL guidance in nearly every state and at least 20 states are using ITRC LNAPL guidance as a reference of as a resource for developing their own guidance.

Reference in guidance documents:

[California Leaking Underground Fuel Tank Guidance Manual](#) (September 2012)

[Iowa Department of Natural Resources Underground Storage Tank Section, Tier 2 Site Cleanup Report Guidance: Site Assessment of Leaking Underground Storage Tanks Using Risk-Based Corrective Action](#) (2015)

[Kansas Bureau of Environmental Remediation Policy # BER-041, Total Petroleum Hydrocarbons \(TPH\) and Light Non-Aqueous Phase Liquid \(LNAPL\) Characterization, Remediation and Management](#) (September 1, 2015)

[Massachusetts Department of Environmental Protection Light Nonaqueous Phase Liquids \(LNAPL\) and MCP: Guidance for Site Assessment and Closure](#) (February 19, 2016)

[Michigan Non-Aqueous Phase Liquid \(NAPL\) Characterization, Remediation, and Management for Petroleum Releases](#) (June 2014)

[Minnesota Pollution Control Agency's LNAPL Management Strategy Guidance](#)

[Montana Department of Environmental Quality, Remediation Division's Montana Light Non-Aqueous Phase Liquid \(LNAPL\) Recovery and Monitoring Guidance](#) (July 15, 2013)

[New Jersey Department of Environmental Protection's Monitored Natural Attenuation Technical Guidance](#) (Version: 1.0, March 1, 2012)

[New Jersey Department of Environmental Protection Site Remediation Program Light Non-aqueous Phase Liquid \(LNAPL\) Initial Recovery and Interim Remedial Measures Technical Guidance](#) (June 29, 2012, Version 1.2)

[Virginia Department of Environmental Quality, Storage Tank Program's Case Closure Evaluation of Sites with Free Product](#) (DEQ Guidance Document #LPR-SRR-03-2012, December 28, 2012)

[Washington Guidance for Remediation of Petroleum Contaminated Sites](#) (Publication No. 10-09-057, revised October 2011)

Multiple states in development.

ITRC LNAPL State Surveys from 2008 and 2017.


## Influencing State Management of LNAPL Sites



**Examples:** ITRC LNAPLs guidance used or referenced in the development of current or draft state guidance



- ▶ Virginia Department of Environmental Quality references ITRC LNAPL guidance documents in its Storage Tank Program's **Closure Evaluation of Sites with Free Product** (DEQ Guidance Document #LPR-SRR-03-2012, December 28, 2012)



- ▶ Colorado Department of Labor and Employment Division of Oil and Public Safety revised its guidance to incorporate concepts from ITRC training courses and guidance documents. <http://www.coworkforce.gov/petroleumguidance/>

Here are a couple specific examples from VA and CO, as leaders of the current LNAPL effort we are very proud of the improvements we have made to our own state's guidance on managing LNAPL sites using ITRC's science-based approach.

VA guidance allows for case closure of sites with LNAPL regardless of thickness



## ITRC's History as LNAPL Solution Provider




- **2009:** *LNAPL-1 (Natural Source Zone Depletion) and LNAPL-2 (Evaluating LNAPL Remedial Technologies)*
- **2010 - 2017:**
  - LNAPL Online Training (3-parts)
  - LNAPL Classroom Training
  - Over 19,000 Trained
- **2016 - 2018:** ITRC LNAPL Update
- **March 2018:** *LNAPL-3 (LNAPL Site Management: LCSM Evolution, Decision Process, and Remedial Technologies)*
- **Spring 2018:** Updated 3-Part LNAPL Online Training

Brief history

## Your Online LNAPL Resource

<https://lnapl-3.itrcweb.org/>

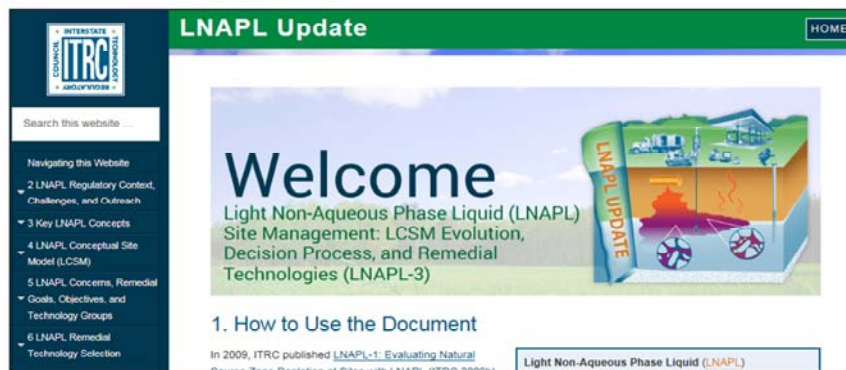

- ▶ Expansion of LNAPL Key Concepts
- ▶ Development of a LNAPL Conceptual Site Model (LCSM) Section
- ▶ Emphasis on identifying SMART objectives
- ▶ Expansion of Transmissivity ( $T_n$ ) and Natural Source Zone Depletion (NSZD) via Appendices

As with all ITRC documents we went through a consensus-based process; a collaborative effort involving State and Federal Regulators, Consultants, Industry Representatives, academia, and community stakeholders to develop our newest ITRC Online Resources

This guidance, *LNAPL Site Management: LCSM Evolution, Decision Process, and Remedial Technologies* (LNAPL-3), builds upon and supersedes both previous ITRC LNAPL guidance documents in an updated, web-based format. LNAPL-1 and LNAPL-2 are still available for review. LNAPL-3 is inclusive of those materials with new topics presented and previous topics elaborated upon and further clarified.

Summarize the new information:

- Expansion of LNAPL Key Concepts
- Development of a LNAPL Conceptual Site Model (LCSM) Section
- Emphasis on identifying SMART (Specific, Measurable, Achievable, Realistic, Timely) goals
- Expansion of Transmissivity ( $T_n$ ) and Natural Sources Zone Depletion (NSZD)

## Who Should Use This Document?



- ▶ State and federal regulators in CERCLA, RCRA, UST, voluntary programs
- ▶ Remediation groups within integrated petroleum and services companies
- ▶ Environmental consulting firms, suppliers, and vendors supporting LNAPL site management
- ▶ Universities and colleges professors / college students in the environmental field



## Where Does This ITRC LNAPL Document Apply?



### All Types of Petroleum Contaminated Sites

From large terminals or bulk storage facilities to your “mom and pop” corner gas station

**The SCIENCE is the same.**

Don't think that the LNAPL release has to be large or new. It does not. For most of us, the release sizes are small and old. No matter the size or age, the underlying science is the same.



## Learning Objectives 3-Part Training Series




- |        |   |
|--------|---|
| Part 1 | ▶ Use LNAPL science to your advantage and apply at your sites   |
| Part 2 | ▶ Develop LNAPL Conceptual Site Model (LCSM) for LNAPL concern identification<br>▶ Inform stakeholders about the decision-making process  |
| Part 3 | ▶ Select remedial technologies to achieve objectives<br>▶ Prepare for transition between LNAPL strategies or technologies as the site moves through investigation, cleanup, and beyond<br>▶ "SMART"-ly measure progress toward an identified technology-specific endpoint |

Our 3-part training series provides you with the knowledge and skills so you can apply the newest ITRC LNAPL guidance at your sites (and for the case of you regulators, potentially help you integrate LNAPL science into your own state guidance).

Here are our learning objectives for our 3-part series..... We will provide a systematic framework to:

- Use LNAPL science to your advantage and apply at your sites
- Develop LNAPL Conceptual Site Model (LCSM) for LNAPL concern identification
- Establish appropriate LNAPL remedial goals and objectives
- Inform stakeholders of the applicability LNAPL remedial technologies
- Select remedial technologies to achieve goals
- Prepare for transition between LNAPL strategies or technologies as the site moves through investigation, cleanup, and beyond
- Evaluate remedial technology use to measure progress toward an identified technology specific endpoint

## ITRC 3-Part Online Training Leads to YOUR Action

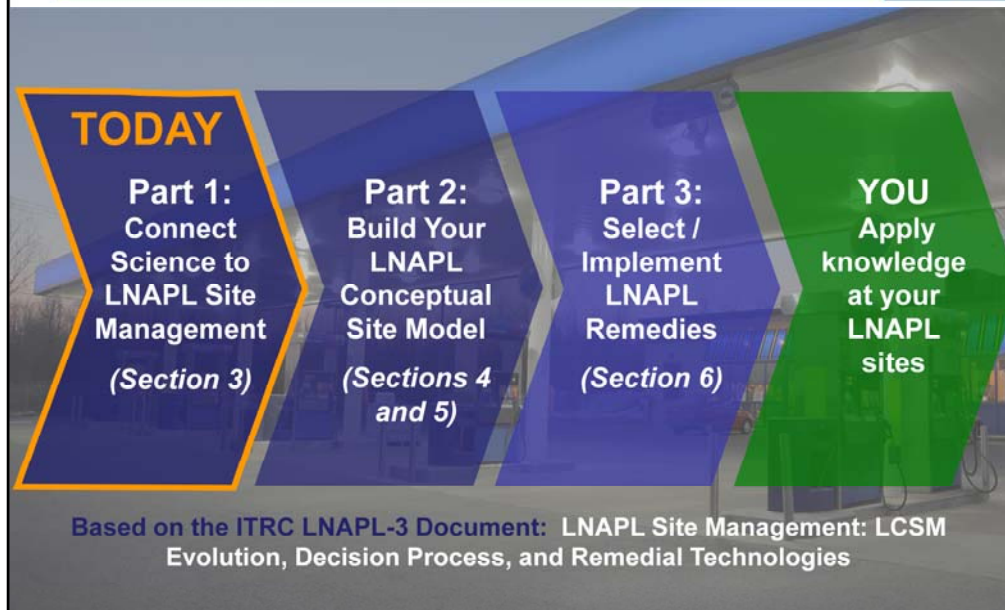

As mentioned, the 3-part training series focuses on helping you:

Connect Science to LNAPL Site Management

Build your LNAPL Conceptual Site Model

Select/Implement LNAPL Remedies

This training will be incomplete unless apply this information. After this training our expectation is that you will use ITRC science-based resources to improve decision making at your LNAPL sites (and for you regulators and other government agency staff, consistent with your own guidance).

Today (CLICK) in Part 1 lets talk about the LNAPL science.

## LNAPL Remediation Process and Evolution of the LCSM – Related to the Training Courses

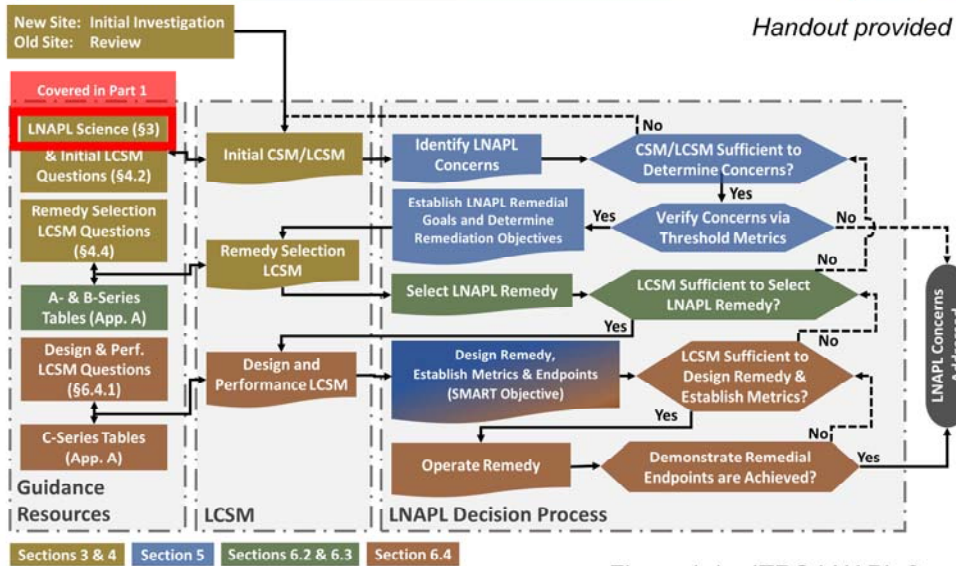


Figure 1-1 – ITRC LNAPL-3

Today (Part 1) we are going to focus on LNAPL science, that will prepare us to effectively navigate the LNAPL Remediation Process and Evolution of the LNAPL Conceptual Site Model (LCSM) (Part 2). If you have already reviewed the new ITRC LNAPL guidance that serves as the basis for our 3-part training class, you have probably seen this flow chart, but to use this flow chart effectively and to make high quality decisions, you need to have an understanding of LNAPL science and how to apply it at your sites. Figure 1-1 identifies the stepwise evolution of the LCSM, the specific purpose of each LCSM phase, and the tools presented within this guidance to aid in the development of the LCSM. As depicted, the LCSM is the driving force for identifying actions to bring your LNAPL site to the appropriate regulatory closure.

## Key Messages



1. LNAPL in wells does not mean 100% LNAPL saturation (dispel “pancake model”)
2. LNAPL can be present in subsurface even if not in wells
  - Indicators
3. LNAPL Composition vs. LNAPL Saturation
  - Raoult's Law
4. Apparent LNAPL Thickness Challenges in Unconfined Conditions
  - Amount changes with soil type
  - Thickness changes with water table position

There are several key concepts that we'd like to cover in this module. Here are some key “take-aways” that you are about to learn.




## Key Messages

5. Apparent LNAPL Thickness in various hydrogeologic conditions (i.e., perched, confined)
6. LNAPL in well does not mean it is migrating
  - Darcy's Law
  - Limiting processes
7. Transmissivity is a better indicator of recoverability
8. Stable LNAPL bodies can still result in sheens
  - Mechanisms
9. Biological processes are significant in LNAPL depletion

Let's take a look at these points one-by-one...


## Key Message 1

Groundwater and LNAPL share pore space  
LNAPL in MWs  $\neq$  100% LNAPL Saturation in Formation

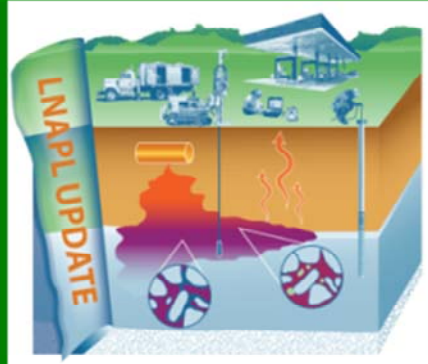

What you see in a well is **not** what you'd see in the formation

## Time Series LNAPL Body Development: Cross Section View

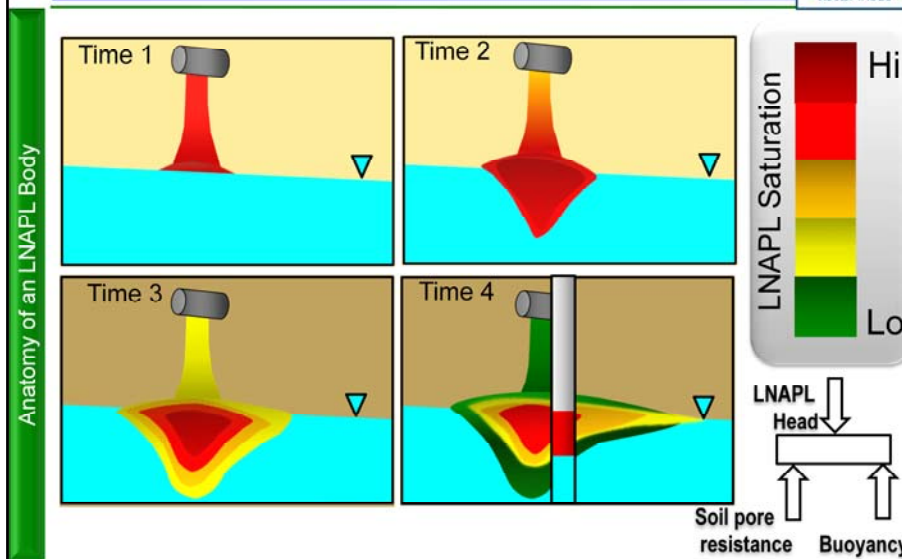

Shows evolution of an LNAPL body over time, starting with the initial release.

Time 1: LNAPL migrates vertically downward through the USZ

Time 2: LNAPL begins to spread laterally and vertically above and below the water table


Time 3: Soil pore resistance and buoyancy begin to counteract LNAPL head (the driving force)

Time 4: LNAPL head is balanced by soil pore resistance and buoyancy, resulting in a distribution of LNAPL that varies with depth and quasi-stable over time.

<click> The LNAPL thickness that accumulates in a well is **not** the same as the LNAPL distribution in the formation. Let's look at some examples...

## Lab Tank Experiment

### LNAPL Penetrates Below the Water Table

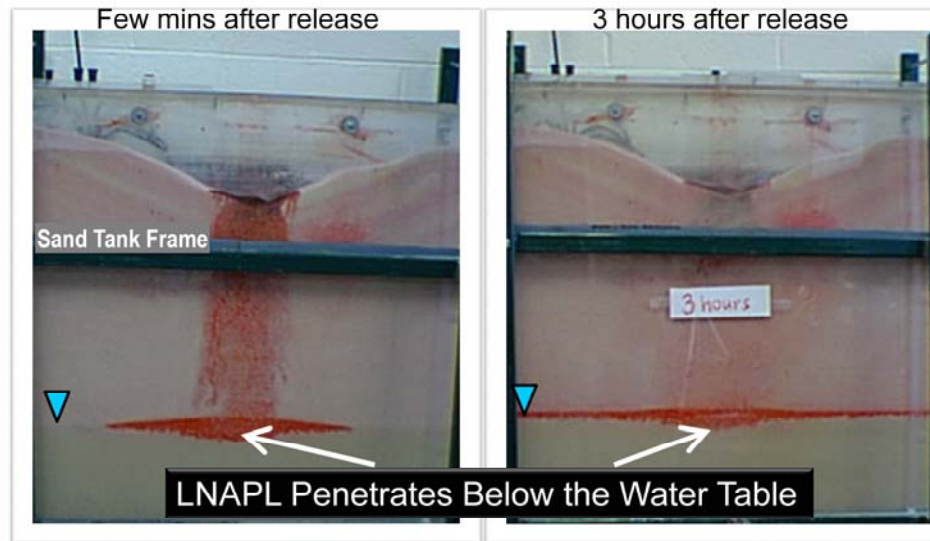

Photographs from Cristin Bruce


This sand tank experiment shows the release of an LNAPL dyed red. The second image shows that the LNAPL distributes above and below the water table, as expected.



## Impacts of LNAPL in the Formation: Key Messages


- ▶ LNAPL penetrates below the water table
- ▶ LNAPL saturation in the formation is not 100% and varies with depth
  - LNAPL shares the pore space with water

**Coming Next:** How to determine LNAPL is there and how much

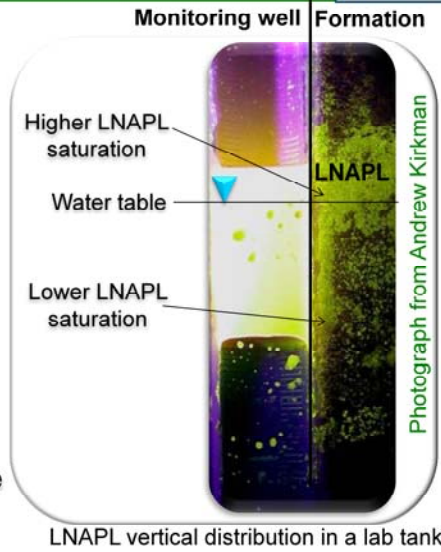

The key message here is that LNAPL doesn't float like a pancake on top of the water table, it penetrates below the water table in a variable saturation profile. This varying saturation arises because the LNAPL and water occupy the same pore space.


## Nature of LNAPL Impacts in the Formation: Below Water Table And Saturation Varies

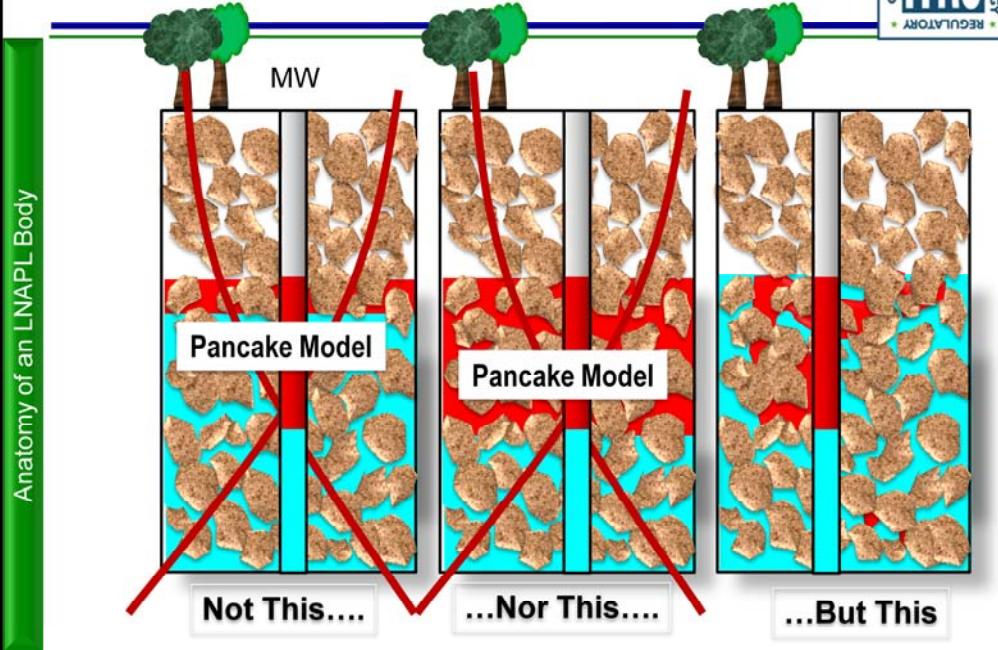

Instead of a layer of continuous uniform LNAPL saturation, LNAPL and water **both exist in the same soil**, in varying amounts. Let's look at this in more detail...

## Key Message 2


LNAPL can be in the formation  
even when it is not accumulating in a well

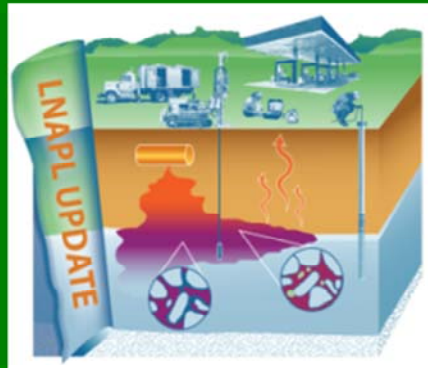

Introduce next speaker

## Nature of LNAPL Impacts in the Formation: LNAPL May Not Even Flow Into A Well


Anatomy of an LNAPL Body

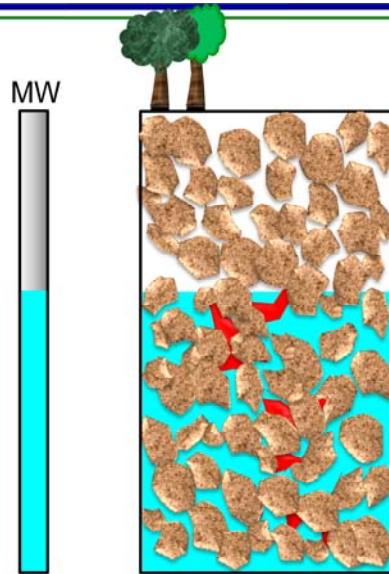

- How do you know that LNAPL is present?
- How do you find out where it is?

In these cases how do you know that LNAPL is present...we have a full section on this...


# It is All LNAPL!

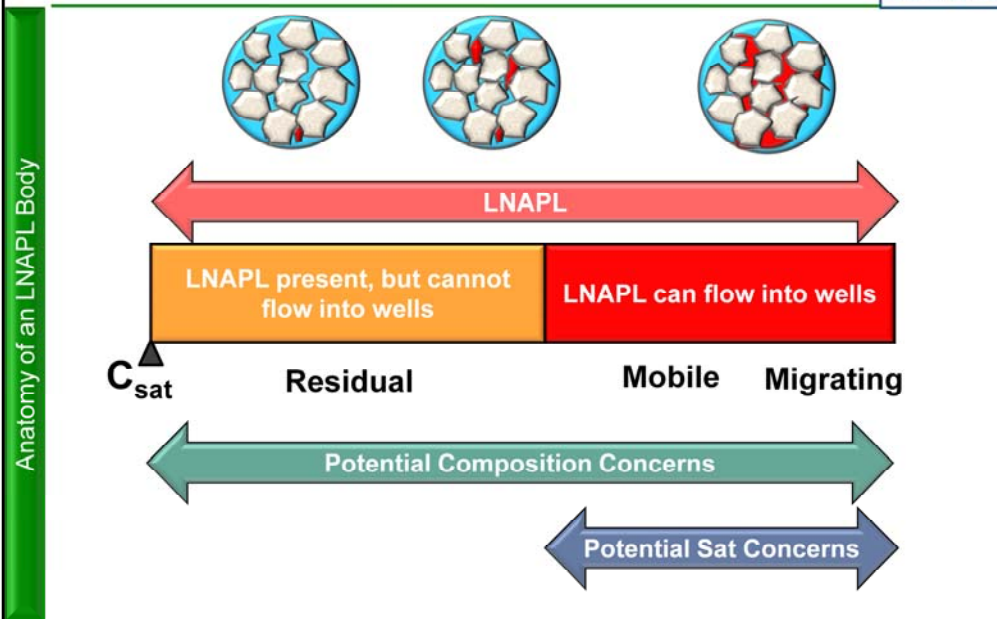

LNAPL exists in many conditions



## LNAPL *Vertical* Extent Can Be Greater Than In-Well LNAPL Thickness


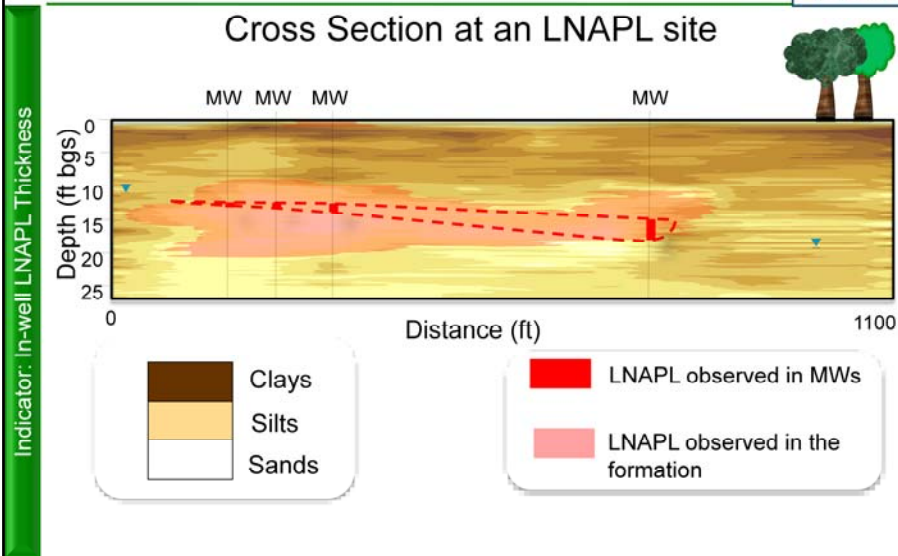


This is a cross-sectional view of an LNAPL plume.

## Dissolved Phase Persistence

Indicator: Dissolved Phase

If There Is a Persistent Groundwater Plume....

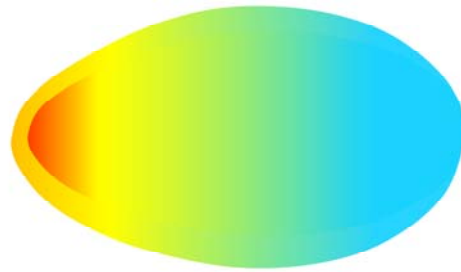

.....there is an LNAPL source

.....it may/may not flow into a well

This is a plan view of an LNAPL plume.

## Effective Solubility Of Select Chemicals From Common LNAPL Mixtures

Effective solubility of each chemical in a mixture like gasoline is a function of Raoult's Law

**Raoult's Law**

$$S_i = x_i S$$

(vapour pressure of the pure component)  
\* (mole fraction in the mixture)

LNAPL Mixture	Chemical	Sol of Pure Chem. (S) (mg/L)	Typical Mole frxn. in Unweathered LNAPL ( $x_i$ )	Eff. Sol of Chem. ( $S_i$ ) (mg/L)
Gasoline	Benzene	1780	0.005 - 0.01	9 - 18
Gasoline	Toluene	535	0.05 - 0.10	27 - 54
Gasoline	Xylene	167	0.05 - 0.10	8 - 17
Diesel	Benzene	1780	0.00005	0.22
Diesel	Toluene	535	0.0005	0.67

Calculator at <http://www.epa.gov/athens/learn2model/part-two/onsite/es.html>

partial vapor pressure of each component of an ideal mixture of liquids is equal to the vapour pressure of the pure component multiplied by its mole fraction in the mixture. In other words it is stated as the relative lowering of vapour pressure of a dilute solution containing nonvolatile solute is equal to the mole fraction of solute in the solution.

## Groundwater Concentrations As An Indicator Of LNAPL

Indicator: Dissolved Phase

0.1%                      1%                      10%                      100%

Conc. in groundwater (% of Effective Solubility)

???                      ??                      ?                      Yes

Likelihood of LNAPL presence in vicinity of observed GW conc

GW – groundwater, conc - concentration

No associated notes.

## Calculated $C_{sat}$ Values



- TPH in soil represents hydrocarbon present in soil gas, pore water, sorbed phase, and LNAPL
- $C_{sat}$  indicates the concentration at which soil gas, pore water and sorbed phase are saturated with hydrocarbon  
 $TPH > C_{sat} \rightarrow \text{LNAPL}$

LNAPL	Soil Type	$C_{sat}$ (mg TPH/Kg Soil)
Gasoline	Medium to coarse sand	143
Gasoline	Fine to medium sand	215
Gasoline	Silt to fine sand	387
Middle Distillate*	Fine to medium sand	9
Middle Distillate*	Silt to fine sand	18

\* approximate to kerosene/diesel

Brost and DeVaul, 2000. API Bulletin 9.

No associated notes.

$C_{sat}$  is significantly lower than concentrations at which LNAPL may actually be observed



## TPH Cautions

Indicator: Conventional Assessment


- ▶ Do not collect soil samples at predetermined intervals (e.g., not each 5 feet)
- ▶ Collect soil samples based on field screening
- ▶ Ensure that TPH range is representative of the LNAPL type
  - Do not assess a diesel spill using TPH-G
  - If heavy hydrocarbons (e.g., crude, >C35) then use Oil & Grease method
- ▶ Do not stop at the water table!



No associated notes.

## Inferring LNAPL from Soil TPH Concentrations


Indicator: Conventional Assessment

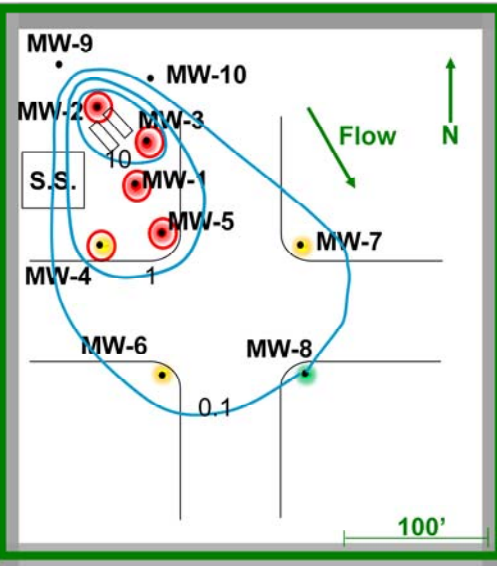

MW	Historical Benzene Concs (mg/L)	Maximum Soil TPH Concs (mg/Kg)
1	5	9300
2	13	24000
3	15	20000
4	1.6	1700
5	3.4	1500
6	0.6	12
7	0.35	10
8	0.1	ND<0.005
9	ND<0.001	ND<0.005
10	ND<0.001	ND<0.005

LNAPL present – MW-1, -2, -3, -4, -5

This is a plan view of an LNAPL plume.  
What is feeding the groundwater?

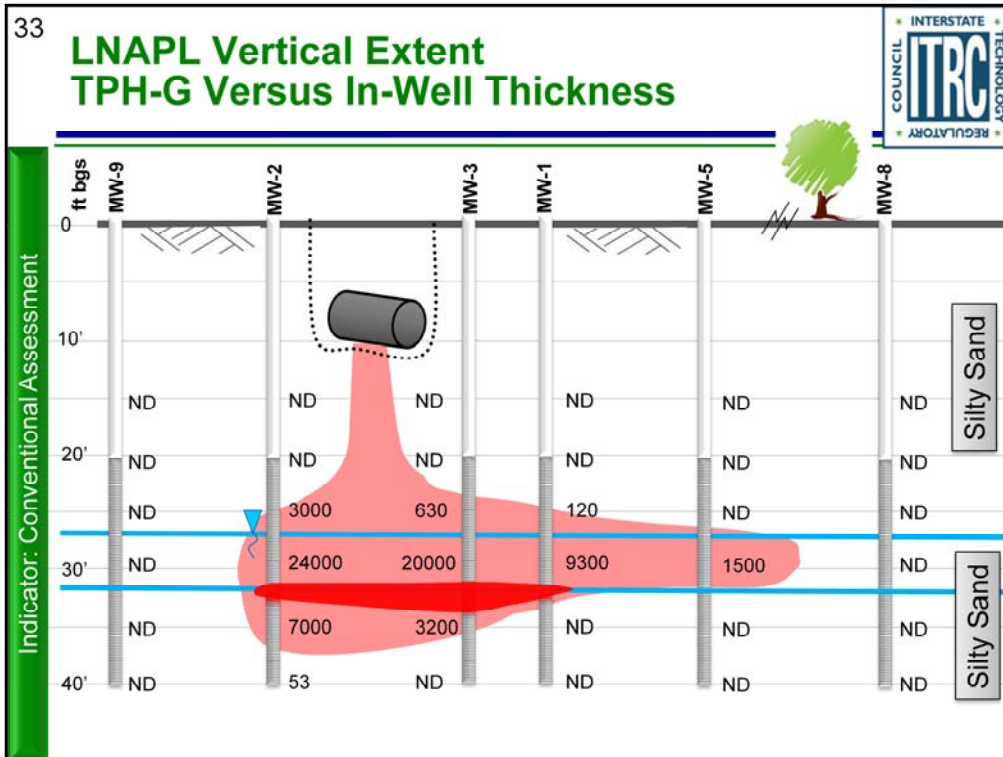

This is a cross-sectional view of an LNAPL plume.

## OVA and Other Field Observations



Indicator: Conventional Assessment

- ▶ Boring logs to characterize LNAPL source zone geometry
  - Lithology, water content, stain, odor, OVA readings



Material Description				Field Records/Construction Information	
Depth (ft)	Soil Type	Soil Color	Soil Moisture	Soil Odor	Soil Staining
0-10	Similar to above, some coarse sandstone	gray - 2mm dia. rock recovery			
10-15	Similar to above, the soil is 10-15% air @ 7.5m				
15-20					
20-25					
25-30					
30-35					
35-40					
40-45					
45-50					
50-55					
55-60					
60-65					
65-70					
70-75					
75-80					
80-85					
85-90					
90-95					
95-100					
100-105					
105-110					
110-115					
115-120					
120-125					
125-130					
130-135					
135-140					
140-145					
145-150					
150-155					
155-160					
160-165					
165-170					
170-175					
175-180					
180-185					
185-190					
190-195					
195-200					
200-205					
205-210					
210-215					
215-220					
220-225					
225-230					
230-235					
235-240					
240-245					
245-250					
250-255					
255-260					
260-265					
265-270					
270-275					
275-280					
280-285					
285-290					
290-295					
295-300					
300-305					
305-310					
310-315					
315-320					
320-325					
325-330					
330-335					
335-340					
340-345					
345-350					
350-355					
355-360					
360-365					
365-370					
370-375					
375-380					
380-385					
385-390					
390-395					
395-400					
400-405					
405-410					
410-415					
415-420					
420-425					
425-430					
430-435					
435-440					
440-445					
445-450					
450-455					
455-460					
460-465					
465-470					
470-475					
475-480					
480-485					
485-490					
490-495					
495-500					
500-505					
505-510					
510-515					
515-520					
520-525					
525-530					
530-535					
535-540					
540-545					
545-550					
550-555					
555-560					
560-565					
565-570					
570-575					
575-580					
580-585					
585-590					
590-595					
595-600					
600-605					
605-610					
610-615					
615-620					
620-625					
625-630					
630-635					
635-640					
640-645					
645-650					
650-655					
655-660					
660-665					
665-670					
670-675					
675-680					
680-685					
685-690					
690-695					
695-700					
700-705					
705-710					
710-715					
715-720					
720-725					
725-730					
730-735					
735-740					
740-745					
745-750					
750-755					
755-760					
760-765					
765-770					
770-775					
775-780					
780-785					
785-790					
790-795					
795-800					
800-805					
805-810					
810-815					
815-820					
820-825					
825-830					
830-835					
835-840					
840-845					
845-850					
850-855					
855-860					
860-865					
865-870					
870-875					
875-880					
880-885					
885-890					
890-895					
895-900					
900-905					
905-910					
910-915					
915-920					
920-925					
925-930					
930-935					
935-940					
940-945					
945-950					
950-955					
955-960					
960-965					
965-970					
970-975					
975-980					
980-985					
985-990					
990-995					
995-1000					



Picture cheiron-resources.com

- ▶ Shake test
- ▶ Oleophyllic dyes for presence of LNAPL
  - Detection +/- 1000 ppm TPH


OVA – organic vapor analyzer

Existing soil data is typically readily available for most sites. However, most of this more historic data is typically in the form of total petroleum hydrocarbon (TPH) data. One way to estimate what the potential saturation of LNAPL within the subsurface is use of an equation developed by Parker, Waddill and Johnson in 1994, which was also presented in the Natural Attenuation text by Wiedemeier, Rifai, Newell and Wilson in 1999.

Typically, information exists from the logs as well but may not necessary be to the detail one would like for a LNAPL assessment.


- Parker, J.C., Waddill, D.W., and Johnson, J.A., 1994. UST Corrective Action Technologies: Engineering Design of Free Product Recovery Systems, prepared for Superfund Technology Demonstration Division, Risk Reduction Engineering Laboratory, Edison, NJ, Environmental Systems & Technologies, Inc., Blacksburg, VA, 77 pp.
- Wiedemeier, T.H., H.S. Rifai, C.J. Newell, and J.T. Wilson, 1999. Natural Attenuation of Fuels and Chlorinated Solvents in the Subsurface. John Wiley & Sons, Inc., New York, NY, 617 pages. Equation on Page 77, equation 2.23.

## Fluorescence of LNAPL

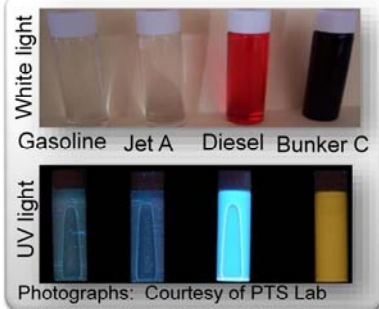


- All that fluoresces may not be LNAPL
  - Minerals, antifreeze, detergents, peat
- All LNAPLs do not fluoresce

### Laser Induced Fluorescence

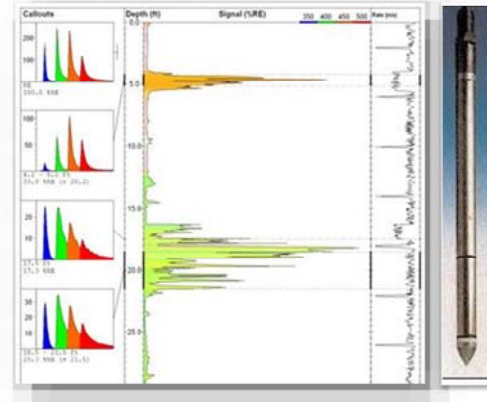

### Laboratory Core UV Photograph

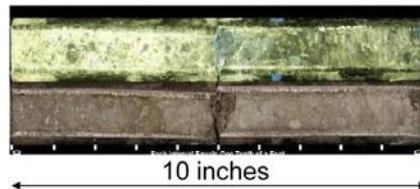


Switching to less conventional approaches.....

Key is detail, detail, detail. Can not have enough detail in logs within the core of the LNAPL body. An example of the detail is shown in this log noting lithology, water content, odor, soil structure, OVA readings and other subtle details. This is aided by use of shaker dyes (shown at bottom) and florescent lighting via a black box in the field or laboratory methods discussed later in this presentation. But what is evident is the variability in the saturation of the LNAPL qualitatively in the UV light image on the right. Shown on the left of this image is a white light photo of the soil, where one can see a zone of a sand lens near the top, which corresponds to a high observation of UV light in the core. LNAPLs tend to fluoresce due to the double bonds, the higher the fluorescence response; typically the more LNAPL is present.

Source of shaker image from: <http://www.cheiron-resources.com>; however, other vendors are available.



## Pore Fluid Saturation

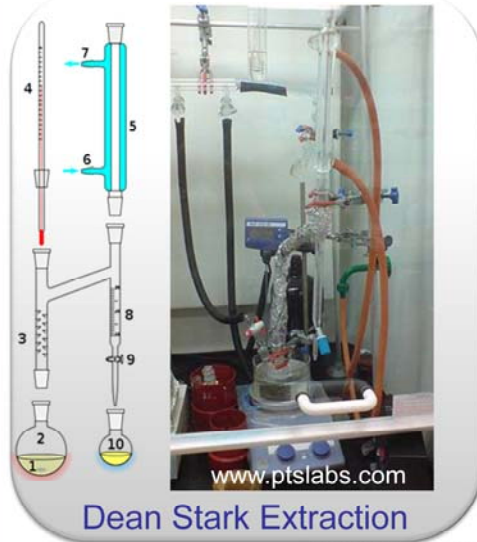

Dean Stark Extraction

10000 mg/Kg ~4-5%

### Correlating TPH & $S_n$

$$S_n = \frac{\rho_b \bullet TPH}{\rho_n n (10^6)}$$


- $S_n$  = LNAPL saturation (unitless)  
 $\rho_b$  = dry soil bulk density (g/cm<sup>3</sup>)  
 $TPH$  = total petroleum hydrocarbons (mg/kg)  
 $\rho_n$  = NAPL density (g/cm<sup>3</sup>)  
 $n$  = porosity

(Parker et al., 1994)

No associated notes.


## Key Message 3

### LNAPL Saturation vs. Composition

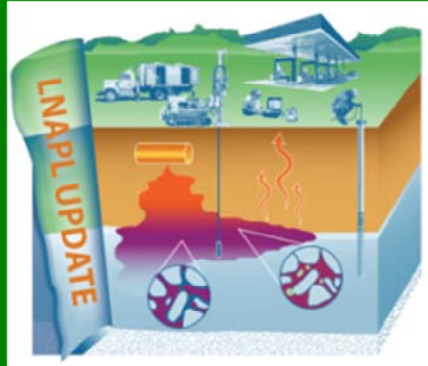


Now that we've introduced the concepts of solubility and saturation, let's look at LNAPL composition and saturation, and why each is important

## Effective Solubility: Raoult's Law

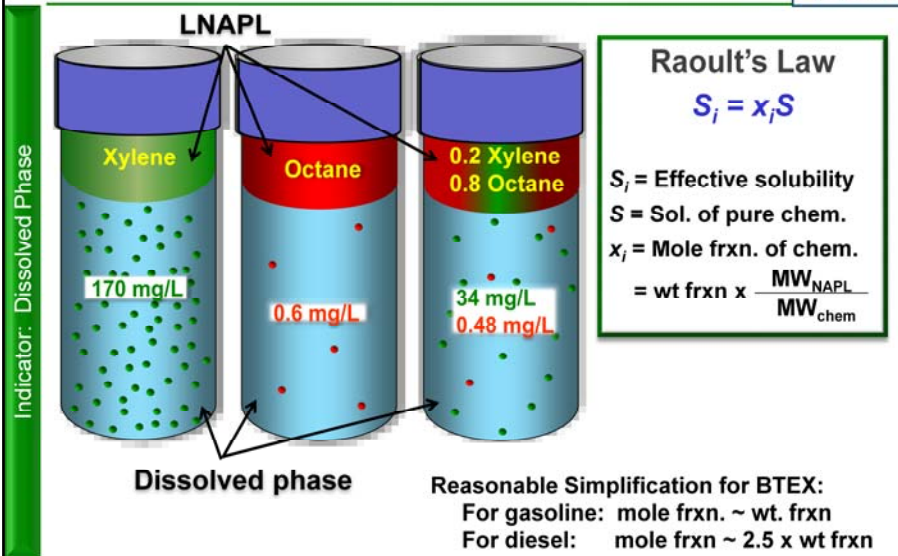


Imagine three LNAPLs: one pure Xylene, one pure Octane, and one that is a mixture of the two.  
 Each closed beaker has LNAPL in equilibrium with water.  
 Single-component LNAPL: solubility of the pure chemical  
 Mixture: solubility follows Raoult's Law

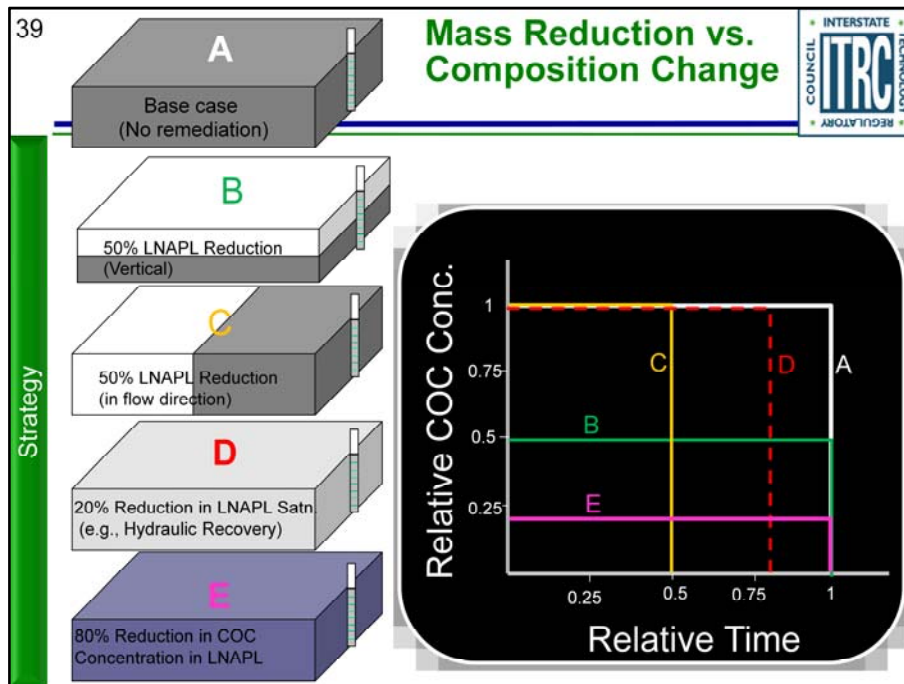

This figure is from our guidance, page 17.

- It illustrates the effect of partial LNAPL mass removal on the LNAPL constituent concentrations in a monitoring well located down-gradient of the source zone and screened completely across the initial thickness of LNAPL impacts.
- Case A is the base case where no active remediation is performed.
- The contaminants of concern (COCs) dissolve into the groundwater until they are completely removed from the LNAPL.
- The rest of the example cases are normalized to Case A.
- In Case B, the LNAPL source has been partially excavated vertically, leaving the lower half of the LNAPL smear zone in place.
- Since the well is screened across the entire thickness of the original impacts, the concentration in the monitoring well is reduced by half due to dilution.
- However, since the source length is not changed, there is no effect of the longevity of groundwater impacts.
- In Case C, the LNAPL source has been partially excavated in the direction of groundwater flow.
- The upgradient half of the LNAPL source has been excavated and other half has been left under a building.
- Here the groundwater concentrations in the monitoring wells are unchanged, but the longevity is theoretically reduced by half (however, its not this simple - remember the previous slide).
- Case D represents a scenario where 20% of the LNAPL body is removed to residual saturation using hydraulic removal, leaving 80% of the LNAPL body in place.
- With a 20% reduction in LNAPL saturation, the concentrations are unchanged, but relative time is theoretically reduced by approximately 20%.
- In Case E, 80% of the COCs are removed from the LNAPL body using air sparging/vapor extraction.
- There is a proportional decrease in the concentrations of COCs in the groundwater emanating from the site.
- One key takeaway is that removing LNAPL mass may have little to no effect on groundwater concentrations

## Impact of LNAPL Recovery – Little Benefit In Reducing Dissolved BTEX Concentration

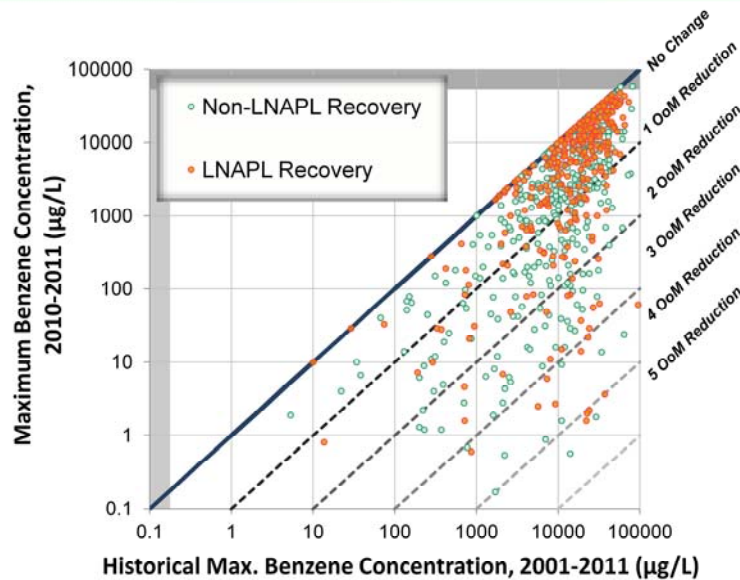

Source: McHugh et al., 2013

The data in this graph come from over 4000 sites with 4 or more years of monitoring data.

X-axis shows max Benzene conc over a ten-year period.

Y-axis shows max Benzene conc in the last year of that same period.


Orange dots are sites with active LNAPL hydraulic recovery

Blue dots are sites with no LNAPL hydraulic recovery.

There is no systematic difference between these two groups of sites, in terms of concentration reduction over time.



## How to Change LNAPL Composition

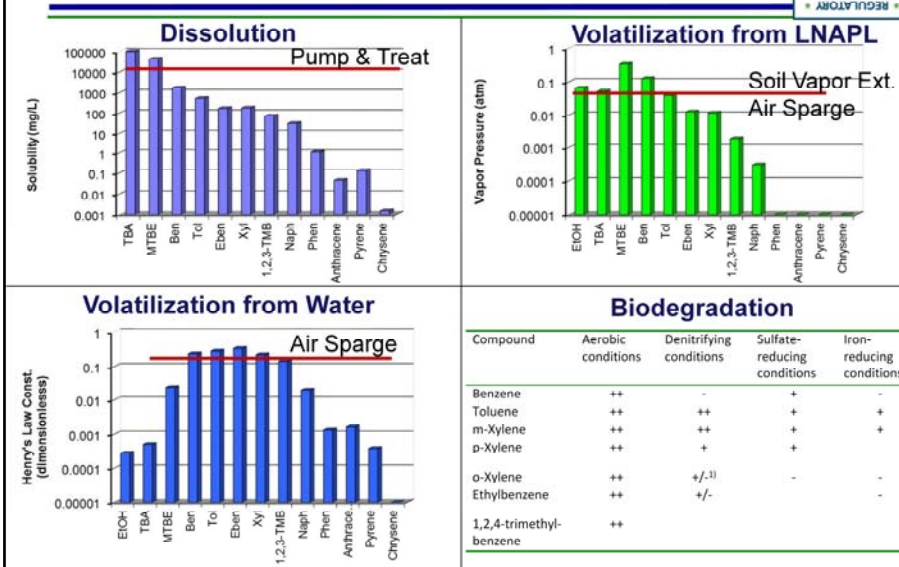

If we wish to reduce groundwater concentrations, Raoult's Law says we need to deplete the mole fraction of that chemical in the LNAPL.

How do we do this?

Here are four example ways, each has more effect on certain chemicals within the LNAPL mixture.

## Knowledge Check



Poll Question

**Background:** Consider a site with gasoline release:

- LNAPL is observed in onsite MWs
- Goal is to reduce concentrations of Benzene in groundwater in ~2 years

**Question:** What would be the appropriate remediation approach?

- A. Start LNAPL removal by pumping
- B. Change LNAPL composition
- C. Let Monitored Natural Attenuation take its course

Remember that MNA focuses on the dissolved phase... it is not the same as NSZD, which we'll talk about soon.

## Key Message 4


**ALL Apparent LNAPL Thicknesses are not created equal!**



**Apparent LNAPL Thicknesses in Unconfined Conditions**

No associated notes.

## Moisture Retention Curves: Relate Capillary Pressure & Fluid Saturation

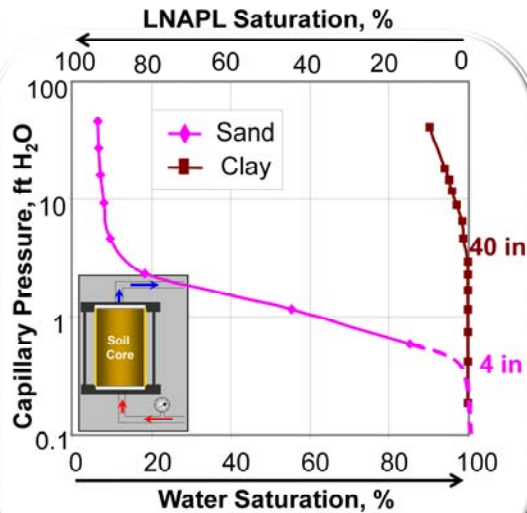


- Relationship between capillary pressure and fluid saturation is established using moisture retention curves
- Unique relationship between capillary pressure and fluid saturations for a given soil type and LNAPL

### Slide 44

Pore Entry Pressure – concept discussed in migration

## Grain Size Effects on Vertical LNAPL Distribution (assumed 3 ft of LNAPL in well)

Interpreting In-well Thickness

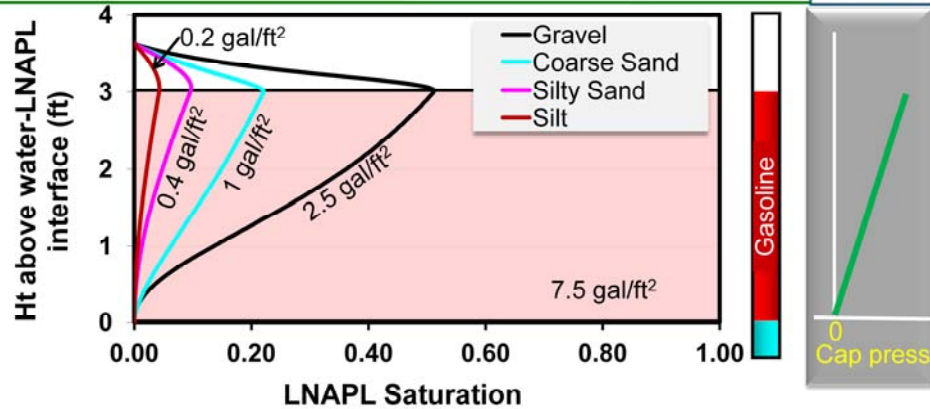

- Volumes based on pancake model (uniform saturations) are over estimated!
- For a given LNAPL thickness, LNAPL saturations and volumes are different for different soil types (greater for coarser-grained soils)

Slide 45

Graph shows volume estimates for different soil types for a given LNAPL thickness in the well.


Volume of gasoline via pancake = LNAPL thickness in well x porosity

Volume of gasoline = area under the curve x porosity

Pancake over-predicts volume and the over-prediction gets more and more significant as grain size becomes smaller.

LNAPL thickness is same for all cases → capillary pressure distribution is same, but pore sizes are different. Therefore, different sharkfins for different soils even though well thickness is the same.

## In-Well LNAPL Thickness Inference on Relative Saturation in Silty Sand

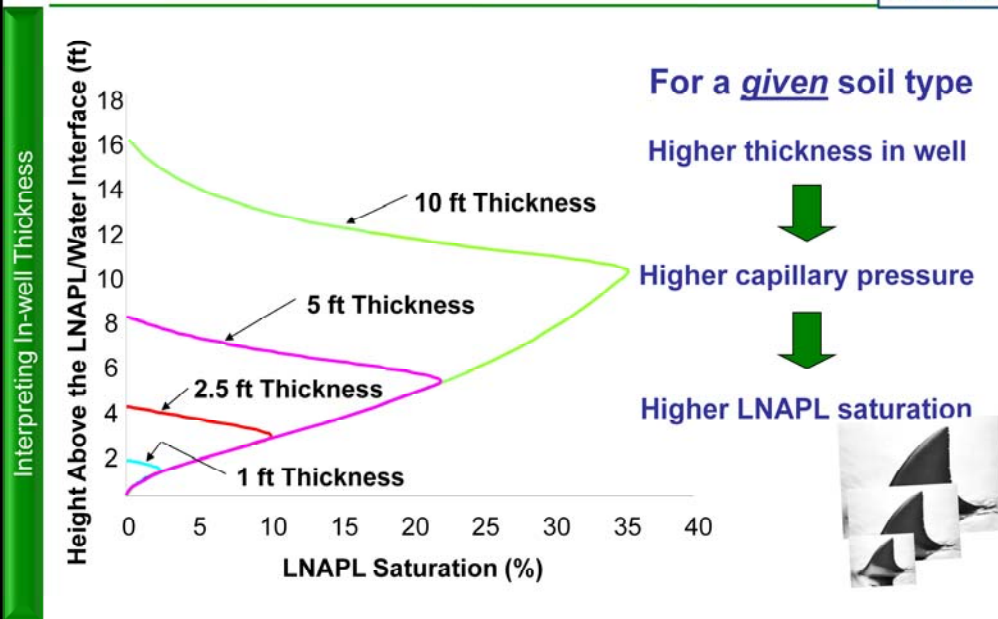

### Slide 46

This slide illustrates that LNAPL (diesel fuel) saturation distributions vary in silty sand with differing LNAPL thicknesses measured in monitoring wells. We can see that for a 10-ft thickness of diesel fuel in a monitoring well, the maximum saturation in silty sand is predicted to be about 36%. If the diesel fuels thickness were 1 foot, the maximum saturation would be predicted to be less than 5%.


In summary, if we have capillary pressure curves and homogeneous media and know the LNAPL thicknesses measured in monitoring wells and the fluid properties, we can estimate the saturations of LNAPL in media of various grain sizes.

If keep adding LNAPL mass, the saturation will reach a maximum ( $<100\%$ , 1 - irreducible water saturation), above which volume will increase, but the saturations will remain constant at that maximum.



## Measured and Modeled Equilibrium LNAPL Saturations

Interpreting In-well Thickness

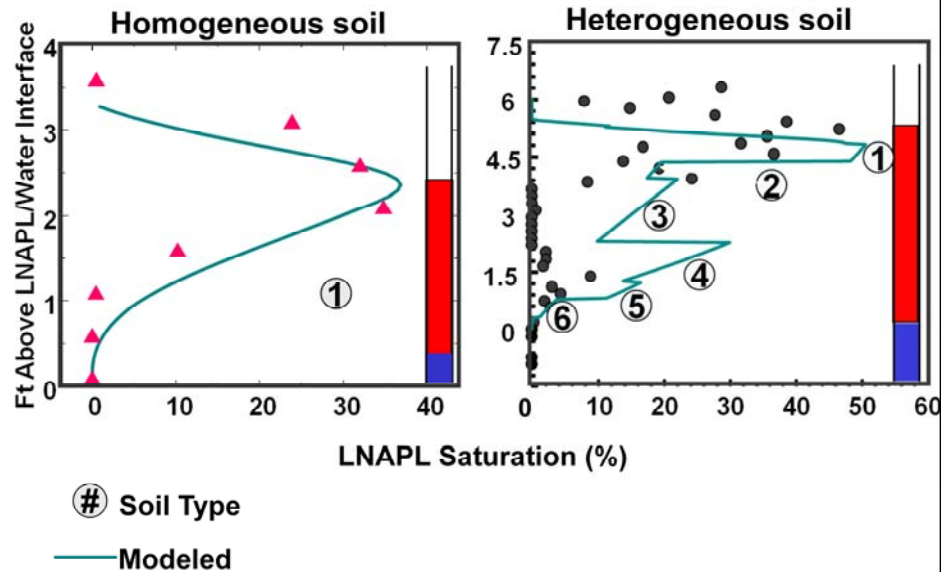

Beckett and Lundegard (1997) , Huntley et al. (1994)

Symbols are data. Lines are calculations.

Left panel has homogeneous soil. Right panel has 6 soil types.


Model predictions have a good match for the homogeneous soil. Reasonable match for the heterogeneous case.

Important to know geology and other factors like water table fluctuations if calculating profile.

Key point: LNAPL Saturation is never 1 and varies.

## Key Message 5

**ALL Apparent LNAPL Thicknesses are not created equal!**

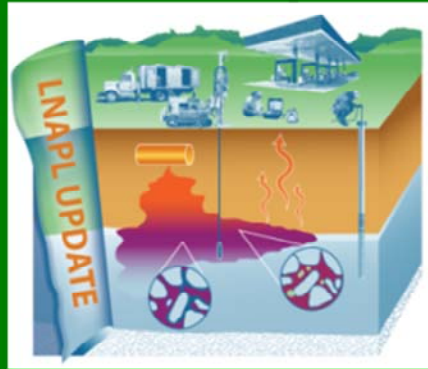

**Apparent LNAPL Thicknesses in Various Hydrogeologic Conditions**


We've just looked at what a stable LNAPL saturation profile looks like when it's on a stationary water table. Now let's see what happens when things change.

## Example Seasonal LNAPL Redistribution



Conceptual Challenges – Water Level

### LNAPL Monitoring Over Time - Refinery

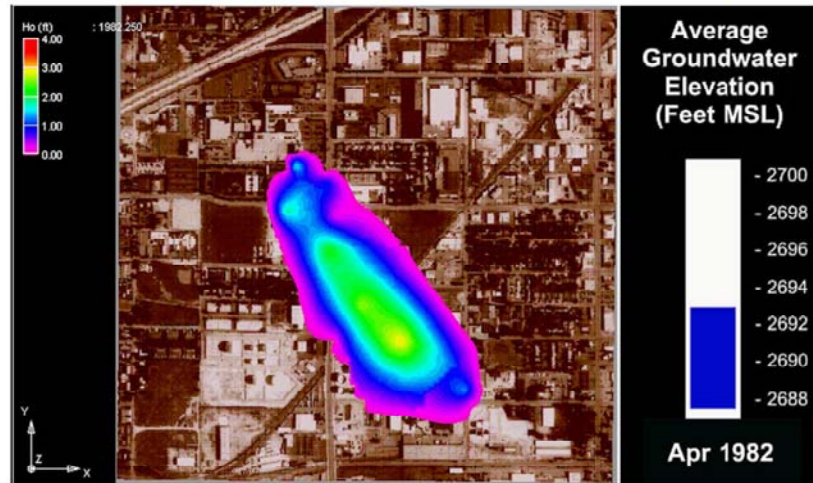

From API Interactive NAPL Guide, 2004

The attached movie illustrates a diesel plume in a gravelly sand aquifer that is characterized by seasonal water table fluctuations. The extent and product thickness were measured from over 50 wells across the site for five years. The apparent well product thickness measurements range from 0 to 4 feet. The groundwater level fluctuates approximately 8 feet seasonally. The blue gauge on the right side of each picture provides the average water level, and the color contours represent the LNAPL thickness in wells. The images illustrate the influence of water table fluctuations in trapping LNAPL as water rises into the oil profile, and in the subsequent drainage of LNAPL during periods of low water level. During this time period, recovery systems were operational, which resulted in the continual loss of product from the aquifer.


Full video in the API Interactive NAPL Guide

## Example Seasonal LNAPL Redistribution



Conceptual Challenges – Water Level

### LNAPL Monitoring Over Time - Refinery

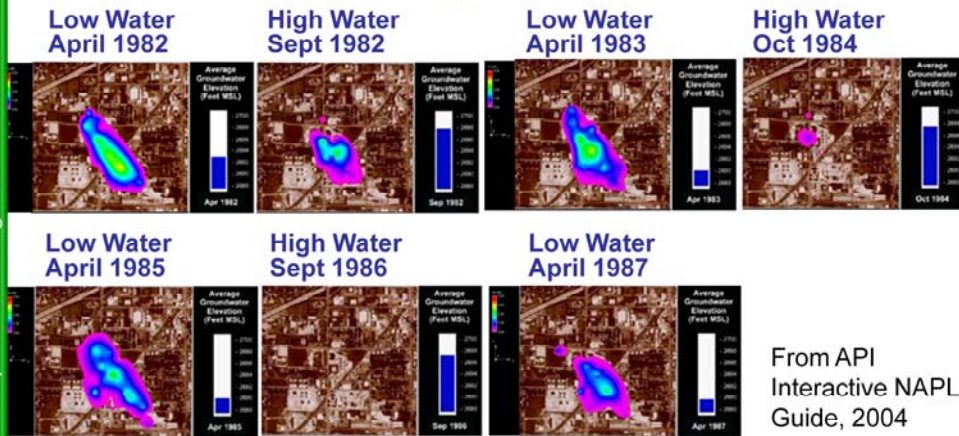


- ▶ Measured LNAPL Depth in Monitoring Wells: 0 to 3 feet
- ▶ Seasonal Water Table Variation: 8 foot range

The attached movie stills illustrate a diesel plume in a gravelly sand aquifer that is characterized by seasonal water table fluctuations. The extent and product thickness were measured from over 50 wells across the site for five years. The apparent well product thickness measurements range from 0 to 4 feet. The groundwater level fluctuates approximately 8 feet seasonally. The blue gauge on the right side of each picture provides the average water level, and the color contours represent the LNAPL thickness in wells. The images illustrate the influence of water table fluctuations in trapping LNAPL as water rises into the oil profile, and in the subsequent drainage of LNAPL during periods of low water level. During this time period, recovery systems were operational, which resulted in the continual loss of product from the aquifer.

Full video in the API Interactive NAPL Guide

51

## LNAPL Thickness change with water table fluctuation (sand tank study)

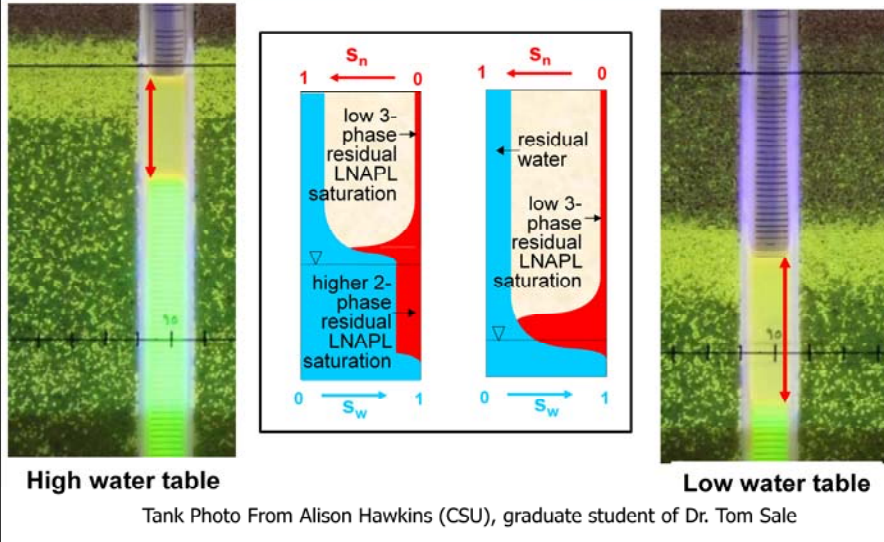


As the water table rises, water displaces LNAPL and air and traps LNAPL in pores.

As the water table drops, air displaces LNAPL and water in the upper part of the smear zone. Less LNAPL is trapped when air displaces LNAPL, so more LNAPL tends to accumulate in wells.



## LNAPL Thickness In Well vs. Water Table Elevation (Unconfined)

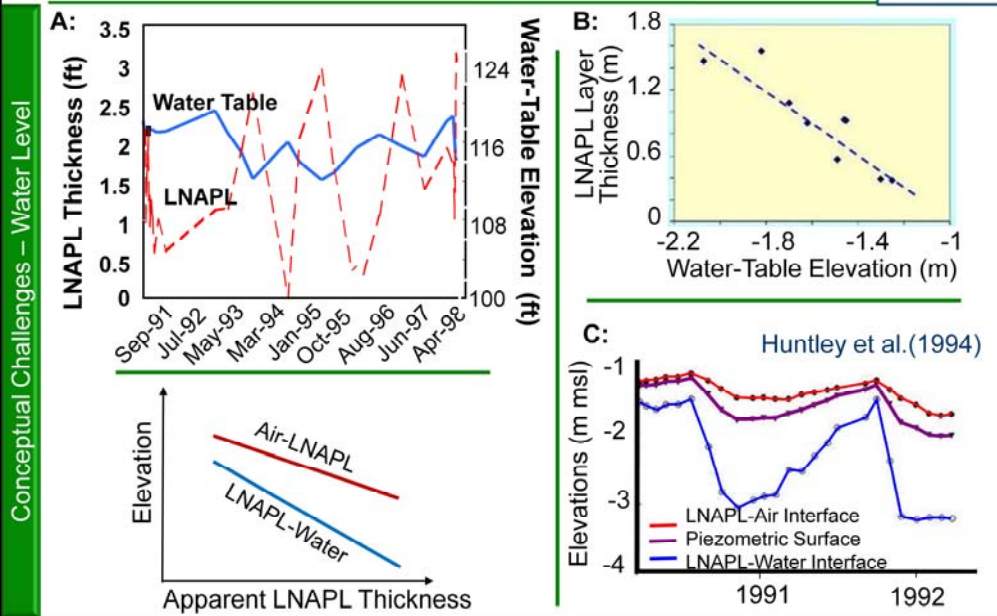

Let's look at how LNAPL accumulates in wells under unconfined water table conditions.

Panel B shows GW elevation plotted against LNAPL thickness. As the water table rises, the LNAPL thickness is reduced.




Panel C shows this over time. Elevations of the top of LNAPL in red, LNAPL-Water interface in blue and the piezometric surface in purple. As the piezometric surface goes up the LNAPL thickness, which is the distance between the red and blue lines, goes down.

What is usually observed here in all hydrographs is that, when the water table elevation decreases, the LNAPL thickness in the monitoring well increases, and vice versa. While changes in the measured LNAPL thickness often are attributed to a redistribution of LNAPL in the aquifer as the water-table elevation changes, this is only part of the story. Let's look at the rest of the story...



## Perched LNAPL Conditions (Exaggerated Well Thickness)


Conceptual Challenges—Perched

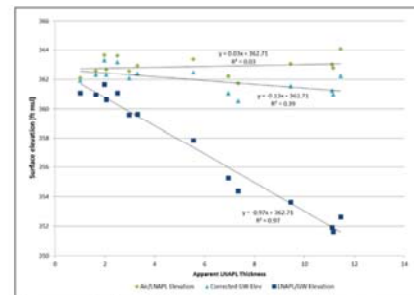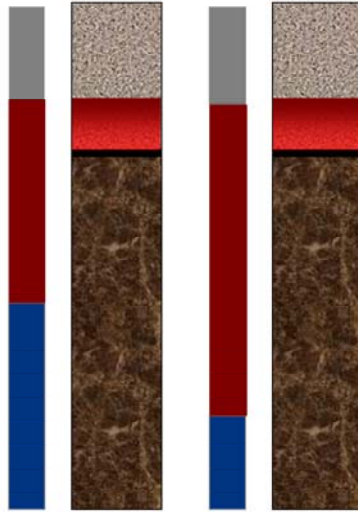

Source: Andrew Kirkman, PE,  
AECOM

What happens when the LNAPL is sitting on a low-permeability layer? This is often called a perched condition. In this instance, the LNAPL has enough head to continue to migrate downward, but it can't, because it is blocked by the soil pore resistance of the fine-grained layer. The well becomes a pathway for drainage of the LNAPL, so it flows into the well. As the water level in the well drops, more LNAPL can flow in, even though the Air-LNAPL interface stays relatively stationary.

## Confined LNAPL Thickness in Well Increases With Water-Level Rise?

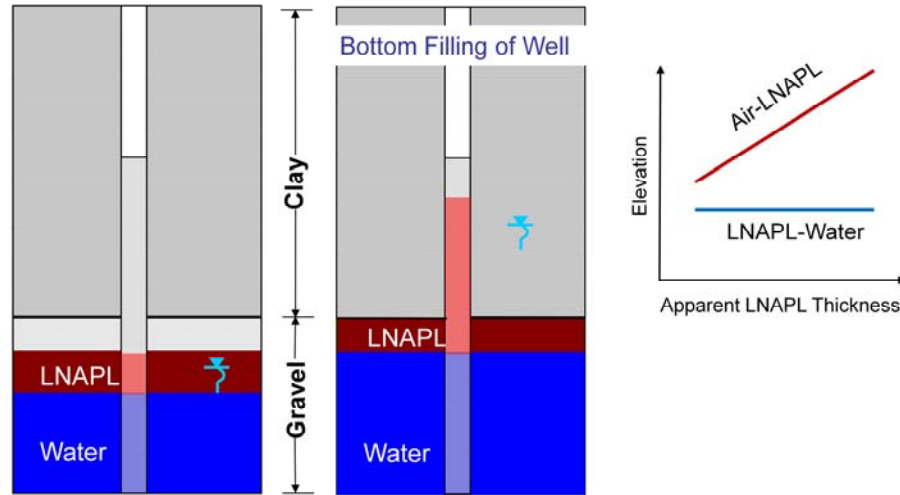


**Monitoring well is a giant pore!**

A confined condition is like a perched condition turned upside down. Let's see how this works.

Left side: LNAPL in unconfined condition. The LNAPL in the well is adjacent to the bulk of the LNAPL in the formation. Water table fluctuations will have an inverse relationship to LNAPL thickness.

Right side: LNAPL/aquifer under confined condition. As the piezometric surface rises, the confining pressure on the LNAPL rises, resulting in an increased thickness in the well. That is, an increase in piezometric surface results in increase in LNAPL thickness under confined conditions.

## LNAPL Thickness vs. Potentiometric Surface Elevation (Confined)

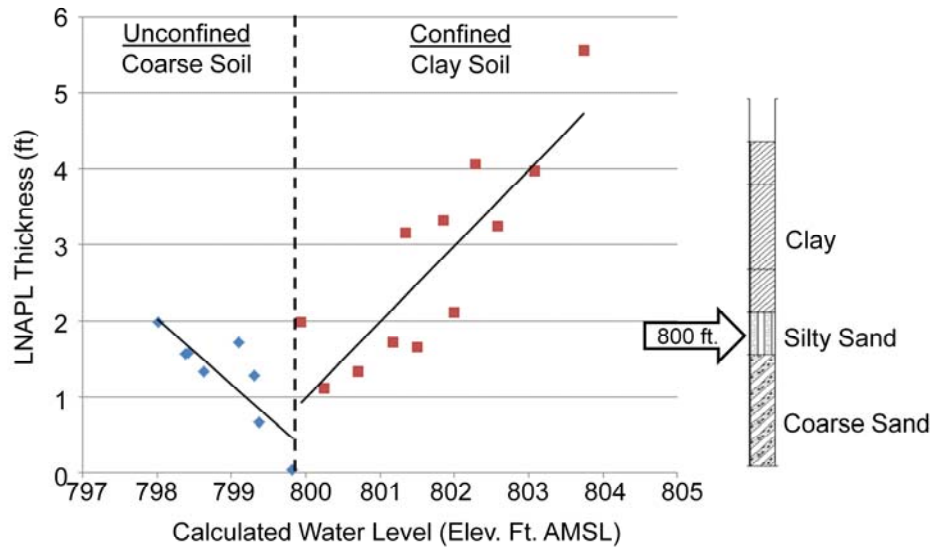


Sometimes LNAPL may be in confined conditions some of the time, and unconfined at other times. At this well, the base of a confining layer exists at 800 ft.

Left Hand Side: Water table in gravel (unconfined condition), LNAPL moves up and down with water table fluctuations, with inverse LNAPL thickness change

Right Hand Side: With recharge, water table rise intercepts confining clay and confined conditions develop. Increase in potentiometric surface results in increase in LNAPL thickness. LNAPL forced into the well and floats to top of potentiometric surface.

## Fractured and Preferential Pathway Conditions

- ▶ LNAPL that is confined in a large pore network that is defined by capillary pressure contrast  
e.g., open fractures, sand surrounded by clay, macropores

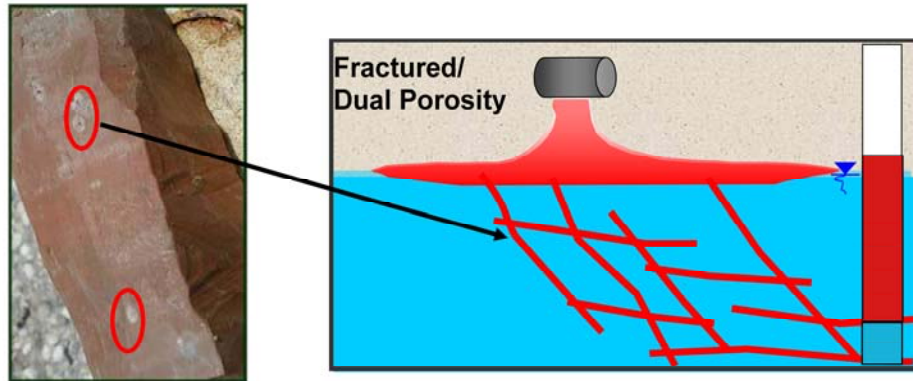

No regular shark fin saturation profile in these situations:

Can act like perched or confined, depending on water level.

Perched: LNAPL drains into well as water table falls, Well acts like a conduit.

Confined: LNAPL is driven into well as water table rises.

Once equilibrium is reached, LNAPL thickness in well will mimic the continuous LNAPL column formed through connected fractures (macropores). Volume in formation is limited to the fractures.

## Why Identifying Hydrogeologic Condition of LNAPL Occurrence Important



### Conceptual Challenges

- ▶ Minimizes or exaggerates LNAPL thickness in wells relative to LNAPL thickness in formation
- ▶ Volume estimates – modeling and recovery system implications
- ▶ Recovery can decrease – while LNAPL thickness is constant
- ▶ Understanding LNAPL migration pathways
- ▶ Development of effective LNAPL remedial strategy
  - Identify zones to target for LNAPL remediation
  - Critical for identifying appropriate LNAPL remediation technology
- ▶ Recovery rate constant for perched – controlled by rate draining off the perching layer (lowering water table won't help)

Understanding the hydrogeologic conditions helps to explain the pattern of LNAPL occurrence. Here are some examples.

## Knowledge Check



Poll Question

**Background:** A site has 7 ft. of LNAPL in a well. After a heavy rainfall season, the LNAPL thickness increases to 9 ft.

**Question:** Which of these is likely to be correct?


- A. LNAPL is unconfined
- B. LNAPL is perched
- C. LNAPL is confined
- D. LNAPL is moving / migrating

Water table rises, LNAPL thickness increases.



## Q&A Break

Follow ITRC

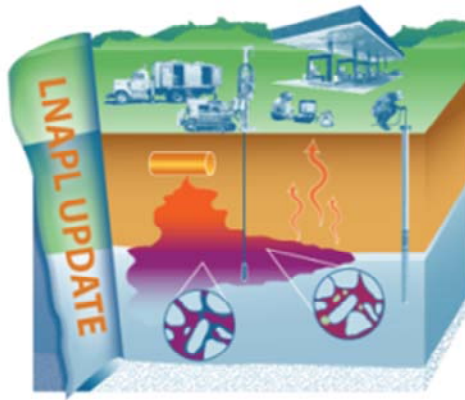


### ► 1<sup>st</sup> Question and Answer Break


No associated notes.

## Key Message 6

Mobile LNAPL does not necessarily mean  
that the LNAPL is migrating

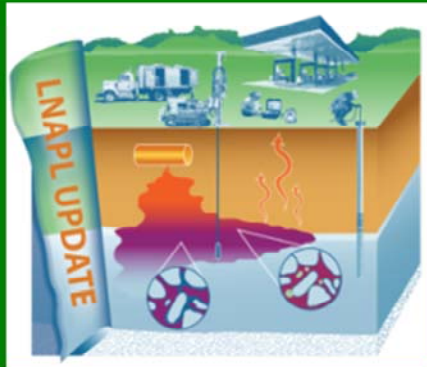

No associated notes.

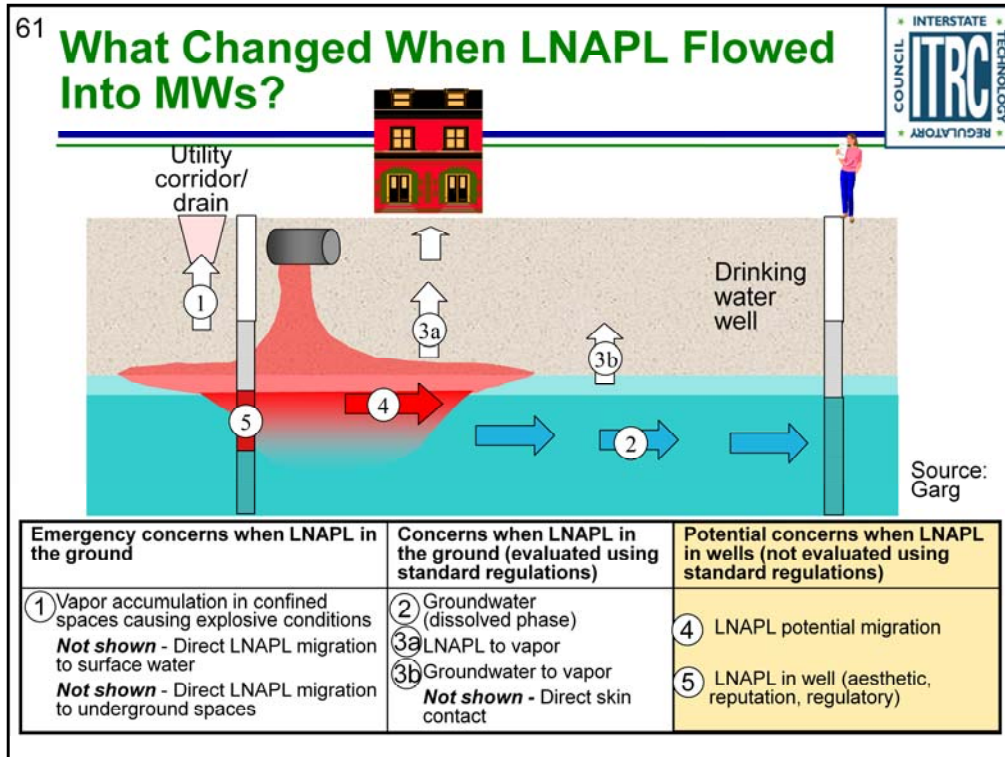

Before considering how LNAPL moves, it is helpful to consider broader considerations for management of LNAPL and the regulatory context for LNAPL mobility.

We begin with LNAPL emergency issues described in left panel, which include safety issues due to explosion and direct contact with LNAPL. In the middle panel, the vapour and groundwater pathways are highlighted. These are common risk pathways that are addressed by most state and federal regulations. The right panel addresses the additional considerations when LNAPL is present in wells, which is potential LNAPL mobility or other aspects that may be relevant due to presence of LNAPL in wells, such as aesthetic considerations, reputation or liability. The focus of the subsequent slides is the fourth point, which is LNAPL mobility. Although many regulatory frameworks have general provisions based on LNAPL presence in wells, such as recovery of LNAPL to the extent practicable, there are few regulations that address LNAPL mobility in detail. In part, our goal here today is to present the science to enable such regulations to be developed.

Notes on potential revisions:

Change title to “LNAPL Management Considerations”

LNAPL emergency issues is typically addressed in regulations. My experience is that virtually all regulations have general prohibitions and cautions respecting factors given.

Replace “evaluated using std. regs) with “typically addressed by regulations”.

## Darcy's Law for LNAPL

Darcy's Law: Applicable to LNAPL

- ▶ Darcy's Law governs fluid flow in a porous media

- $q = K i$

- ▶ In a water / LNAPL system, not just dealing with a single fluid (groundwater or LNAPL)

- ▶ Darcy's Law applicable to each fluid (water / LNAPL) independently

Darcy's Law for water flow:  $q_w = K_w i_w$

Darcy's Law for LNAPL flow:  $q_n = K_n i_n$



$q$  = Darcy flux (L/T)

$K$  = fluid conductivity (L/T)

$i$  = gradient

$w$  = water

$n$  = LNAPL

Will next look at LNAPL conductivity ( $K_n$ ) and LNAPL gradient ( $i_n$ )


Just as Darcy's Law governs the flow of groundwater, it also controls the movement of LNAPL, however, the LNAPL and groundwater co-exist and share pores, so we are not just dealing with characterizing the flow of a single fluid. As will be subsequently shown on slides, Darcy's Law is applicable to each fluid independently.

## LNAPL Conductivity



LNAPL conductivity:

$$K_n = \frac{\rho_n \cdot g \cdot k}{\mu_n} k_{rn}$$

$$K_n = K_{w,sat} \frac{\rho_n}{\rho_w} \frac{\mu_w}{\mu_n} k_{rn}$$



$K$  = conductivity  
 $k$  = intrinsic permeability  
 $k_r$  = relative permeability  
 $\rho$  = density       $\mu$  = viscosity  
 $_n$  = LNAPL       $_w$  = water  
 $g$  = acceleration due to gravity

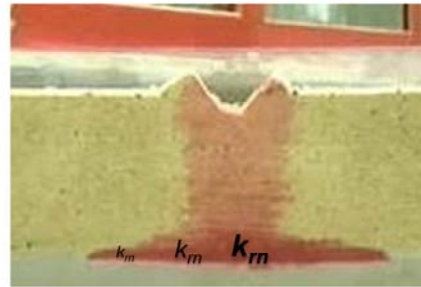


This slide begins with the simple Darcy's Law for fluid flow for both water and LNAPL in equations 1 and 2. For LNAPL, the specific discharge,  $q$  subscript  $o$ , is a function of the LNAPL conductivity and LNAPL gradient. Equations 3 and 4 are two expressions that relate oil conductivity to permeability. The first equation relates the oil conductivity to the relative permeability of LNAPL, the intrinsic permeability of the porous media, and properties of water. The second equation relates the oil conductivity to the relative LNAPL permeability, saturated hydraulic conductivity and properties of oil and water. These are important equations used by models for predicting LNAPL mobility.

It is also worthwhile exploring how changes in parameters affect the LNAPL flow. An increase in relative permeability of LNAPL increases the oil conductivity and flow rate. The relative permeability of LNAPL varies over many orders of magnitude. Likewise an increase in density also increases the LNAPL flow rate, however, since changes in density are small, this is not an important parameter with respect to mobility. The third variable, viscosity, is of moderate importance, with an opposite trend shown where an increase in viscosity decreases the LNAPL flow rate.

## LNAPL Gradient: For a Finite Release Flattens over Time

Darcy's Law: Applicable to LNAPL

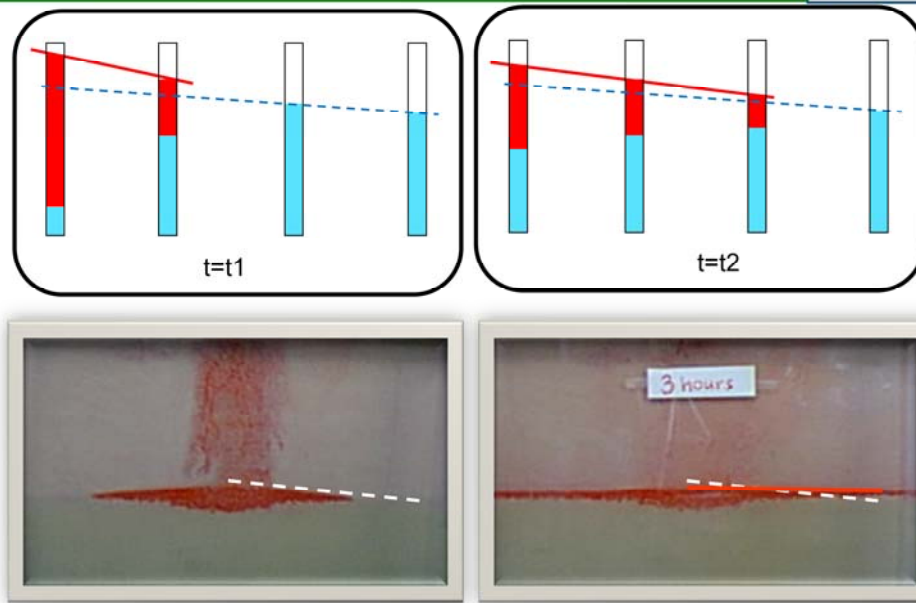


This is a cross-sectional view of an LNAPL plume.



## Pore Entry Pressure: LNAPL Behavior

- ▶ Similar behavior when LNAPL tries to enter pores with pre-existing fluids
  - Fluid does not encounter resistance when flowing into like (e.g., groundwater flow)
  - Soil pores less wetting to LNAPL than water: LNAPL encounters resistance
  - Soil pores more wetting to LNAPL than air: LNAPL displaces air easily
- ▶ LNAPL only moves into water-wet pores when entry pressure (resistance) is overcome
  - To distribute vertically and to migrate laterally


For water-wet media

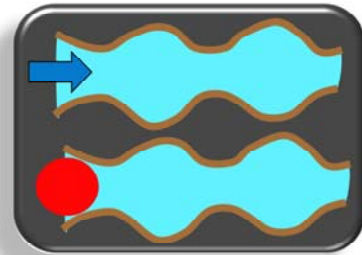

**Key Point:** Pore Entry Pressure is the resistance that LNAPL encounters when flowing into a pore with preexisting groundwater

## NSZD (Natural Source Zone Depletion) Contributes to LNAPL Stability

- Rates have been measured at about 100 to 1000 gallons per year per acre (Lundegard & Johnson 2006; ITRC 2009; Sale 2011)

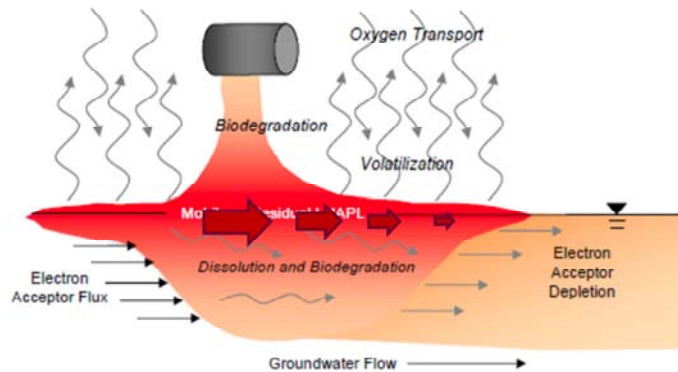

This is a cross-sectional view of an LNAPL plume.


## Lines of Evidence:

### 1. Gauging Data



- ▶ Monitoring results (assumes adequate well network)
  - Stable or decreasing thickness of LNAPL in monitoring wells
  - Sentinel wells outside of LNAPL zone remain free of LNAPL

**Caution:** Need to account for water-table fluctuations when evaluating thicknesses

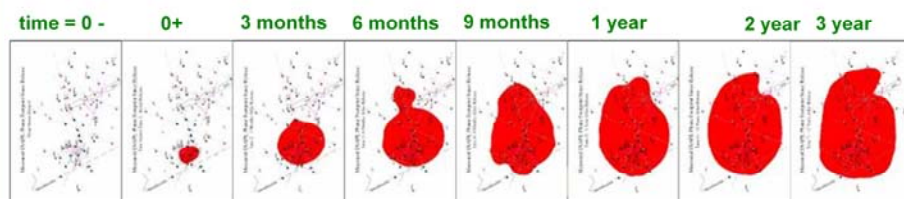

The emerging approach for evaluating LNAPL mobility is a multiple lines of evidence approach. The intent here is to provide an overview of this approach, the technical regulation that the ITRC LNAPL team is developing will provide additional details.

The first line of evidence and typically the primary and most important one are monitoring results. Assuming that there is an adequate monitoring network and sufficient temporal data, there are several factors that are evidence for a stable footprint, which are a stable or decreasing thickness of LNAPL in monitoring wells, sentinel wells outside of the LNAPL zone that remain free of LNAPL and a shrinking dissolved phase plume


The second line of evidence involves calculating the potential LNAPL velocity using Darcy's Law. The key parameter, which is the LNAPL conductivity, may be estimated from bail down tests, or from the measured LNAPL thickness, soil capillary parameters and model that assumes static equilibrium. The API Interactive LNAPL Guide is one tool that may be used to estimate the LNAPL velocity using this model. Some guidance documents have suggested that the calculated LNAPL velocity be compared to a de minimus LNAPL velocity below which one would generally not be concerned with LNAPL mobility. It is important to recognize that use of Darcy's Law would be precluded for some site conditions, such as a fractured bedrock site.

New emerging method for estimating LNAPL tracer dilution method

## Lines of Evidence: 2. Groundwater Data


### ► Dissolved-phase plume maps

- Characterize source area shape, size and depth
- Assess if natural attenuation on-going
- Shrinking/stable GW plume = shrinking/stable LNAPL body

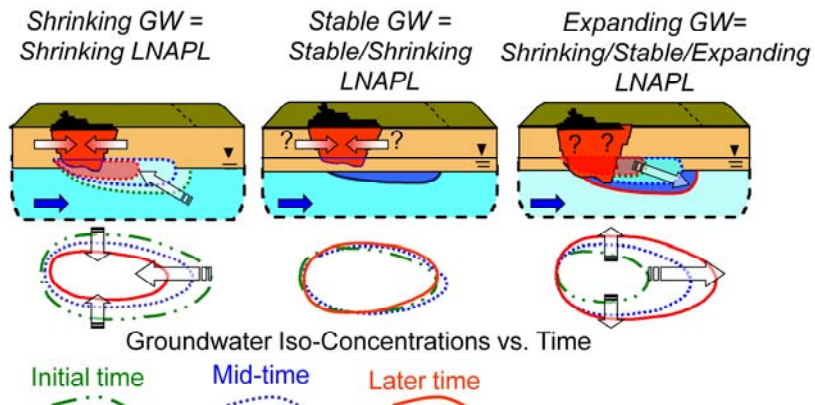

No associated notes.

## Lines of Evidence: 3. Measured LNAPL Thickness < Critical Thickness

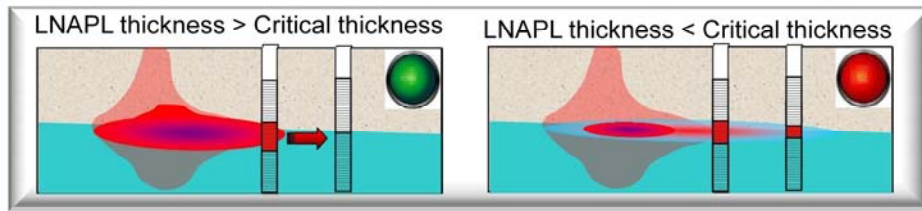

Soil Type	Capillary Fringe Height (ft)	Critical LNAPL Thickness for Gasoline (ft.)	Critical LNAPL Thickness for Diesel (ft.)
Sand	0.23	0.7	1
Sandy Loam	0.43	1.4	2.1
Loam	0.92	2.8	3.6
Silt	2.03	4.8	5.9
Sandy Clay	1.21	3.9	4.9
Clay	4.10	6.6	9.5
Silty Clay	6.56	8.7	13.8

 Ref. Charbeneau et al. (1999)  
API Publication No. 4682

The third line of evidence is to compare the measured LNAPL thickness to a calculated threshold LNAPL thickness in wells required to invade water-wet pores based on the displacement entry pressure model. There is still some debate on the use of this model as indicated earlier in this training.

The fourth line of evidence are recovery rates observed as LNAPL is removed from a well. Although not directly correlated to LNAPL mobility, declining recovery rates would generally indicate reduced potential for LNAPL mobility.

The fifth line of evidence is the age of the release, when known. If a relatively long time has transpired since the release, there is reduced potential for mobility due to smearing of LNAPL within soil and weathering of LNAPL through dissolution, biodegradation and volatilization.

The sixth line of evidence are field and laboratory tests. While these are indirect indicators, if for example measured LNAPL saturations are less than residual saturation obtained from centrifuge test, then there will likely be little potential for LNAPL mobility. However, these tests are approximate and for example centrifuge tests would tend to over predict mobility.

## Other Lines Of Evidence Of LNAPL Footprint Stability



4. Low LNAPL Transmissivity
  - Low  $K_n$
  - Site measurements yield average values – can have higher  $K_n$  lenses
5. Age of the release
  - Abated release
  - Timing of release (if known)
  - Weathering indicators
6. Recovery rates
  - Decreasing LNAPL recovery rates
7. Laboratory tests
  - Saturation and residual saturation values
8. Tracer test
  - Measures rate of dilution of hydrophobic tracer

The third line of evidence is to compare the measured LNAPL thickness to a calculated threshold LNAPL thickness in wells required to invade water-wet pores based on the displacement entry pressure model. There is still some debate on the use of this model as indicated earlier in this training.

The fourth line of evidence are recovery rates observed as LNAPL is removed from a well. Although not directly correlated to LNAPL mobility, declining recovery rates would generally indicate reduced potential for LNAPL mobility.

The fifth line of evidence is the age of the release, when known. If a relatively long time has transpired since the release there is reduced potential for mobility due to smearing of LNAPL within soil and weathering of LNAPL through dissolution, biodegradation and volatilization.

The sixth line of evidence are field and laboratory tests. While these are indirect indicators, if for example measured LNAPL saturations are less than residual saturation obtained from centrifuge test, then there will likely be little potential for LNAPL mobility. However, these tests are approximate and for example centrifuge tests would tend to over predict mobility.



## LNAPL Migration: Case Examples



### What we have observed at sites:

- ▶ LNAPL can initially spread at rates higher than the groundwater flow rate due to large LNAPL hydraulic heads at time of release
- ▶ LNAPL can spread opposite to the direction of the groundwater gradient (radial spreading)
- ▶ After LNAPL release is abated, LNAPL bodies come to be stable configuration generally within a short period of time




The next three slides present case studies on LNAPL mobility. Before looking at specific cases, the general observations are that:

LNAPL can initially spread at rates higher than groundwater flow

LNAPL can spread in the opposite direction to groundwater flow direction due to mounding of LNAPL and radial spreading, and finally,

LNAPL bodies tend to come to stable configurations in relatively short time periods

## Case Example 1: LNAPL Release and Spreading

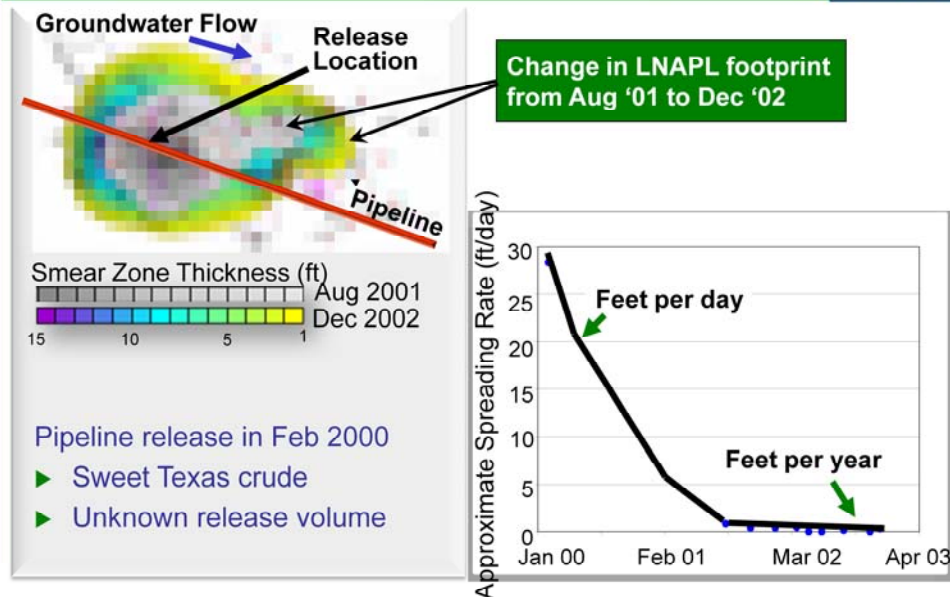

The second case example is measured data at a pipeline site crude oil release. The upper left figure is a plan showing the spread in the LNAPL thickness over time. The grey area represents the spread between when the release occurred, in February 2000 and October 2001. The blue and yellow zone represents the additional spreading between October 2001 and December 2002. An important characteristic shown in this figure is that the LNAPL spreads radially from the release location and not only in the direction of groundwater flow.

The figure in the lower right shows the estimated rate of LNAPL spreading, which initially was on the order of a few feet per day, and after about a year and half, decreased to few feet per year.


After December 2002, no additional LNAPL was observed to migrate in sentinel wells surrounding the release area. The LNAPL plume is considered to be functionally stable, which refers to a state or condition where there is some vertical and lateral redistribution of LNAPL, but where additional movement is relatively minor and should not impact ongoing plume management objectives.

The dissolved concentrations in groundwater are also monitored routinely and indicate that the dissolved plume is also reaching a stabilized footprint around the LNAPL smear zone. The dissolved plume behavior can be used to infer LNAPL stability, if dissolved plume is stable or shrinking, the LNAPL is unlikely to be expanding.

## Case Example 2: Bemidji, MN North Pool Transect LIF Signatures



LNAPL Migration: Case Examples

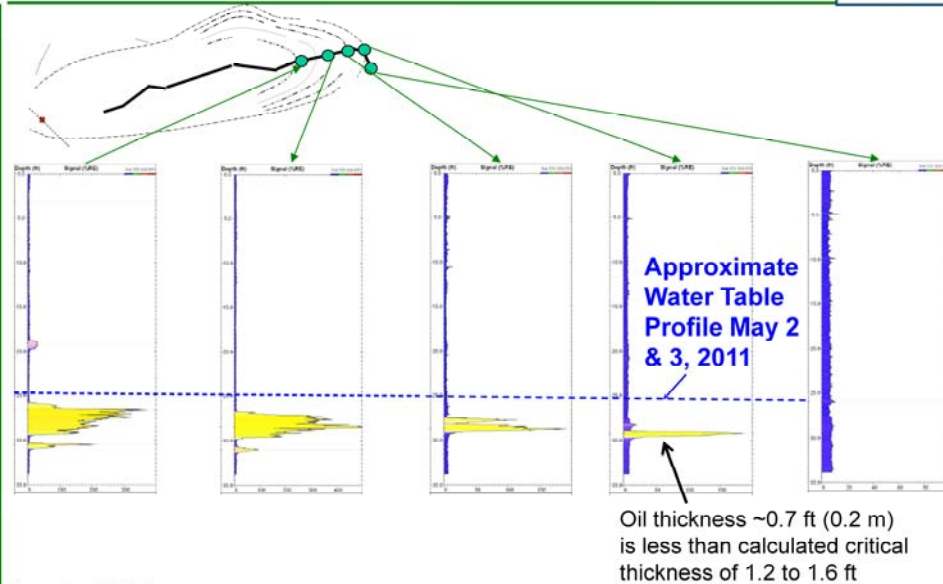

Lundy, 2012

The smaller thickness recorded by the LIF tool is consistent with notion that the oil previously met the critical thickness, but weathering has reduced the thickness.

The oil meets the critical thickness at location TG1126, but spreading from there to TG1102 is sufficient to meet the criteria. A UVOST LIF probe near TG1102 was non-detect on oil

UVOST can only detect aromatics like BTEX up to and including Naphthalene. TarGOST can only see the PAHs from Naphthalene to larger multiple-ring aromatics.

## Case Example 2: Bemidji, MN Preliminary Estimates of Rates of Spreading vs Mass Depletion




### ► Oil discharge from oil infiltration zone

- Baildown test oil transmissivity,  $T_{oil}$
- $Q_{oil} = K_{oil} i_{oil} \text{ Area}$
- 2.2 kg/d leaving infiltration area

### ► CO<sub>2</sub> flux, proxy for LNAPL mass depletion

- 4.3 kg/d over downgradient area

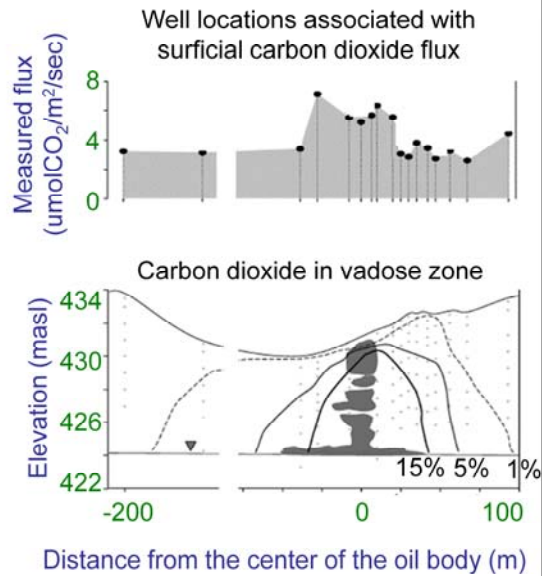

Lundy, 2012 and Sihota et al. 2011

Here are the mass discharge rates...we have 2.2 kg/d of oil phase leaving the infiltration area, and 4.3 kg/d discharging to the atmosphere downgradient of that area.

## LNAPL Migration Potential / Stability Summary




- ▶ Mobile LNAPL is not necessarily migrating LNAPL
  - In-well LNAPL does not mean it is moving
- ▶ Principles of Darcy's Law apply
  - LNAPL can spread upgradient and migrate rapidly in the early phases following a release
  - Self-limiting process, once the release is abated
- ▶ LNAPL needs to overcome pore-entry pressure to move into a water-saturated pore
- ▶ NSZD (Natural Source Zone Depletion) contributes to LNAPL stability
- ▶ Use multiple lines of evidence to assess LNAPL stability

No associated notes.

## Key Message 7



LNAPL Transmissivity is a better indicator  
of recoverability

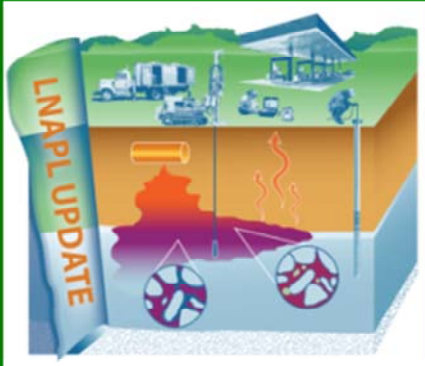

When is hydraulic recovery feasible? What is a practicable endpoint for recovery?





## Apparent LNAPL Thickness Not a Good Indicator of Recoverability

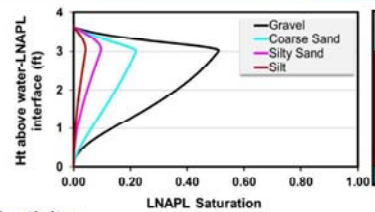

LNAPL conductivity:

$$K_n = \frac{\rho_n \cdot g \cdot k}{\mu_n} k_{rn}$$



**Need a metric that is indicative of LNAPL recoverability!**

Thickness “seems” like a good indicator... but it’s not.


## 78 Groundwater Transmissivity – The Standard for Groundwater Producibility

- **Transmissivity** - proportionality coefficient describing the ability of a permeable medium to transmit water

$$T_w = K_w \cdot b_w$$

$K_w$  = hydraulic conductivity

$b_w$  = aquifer thickness

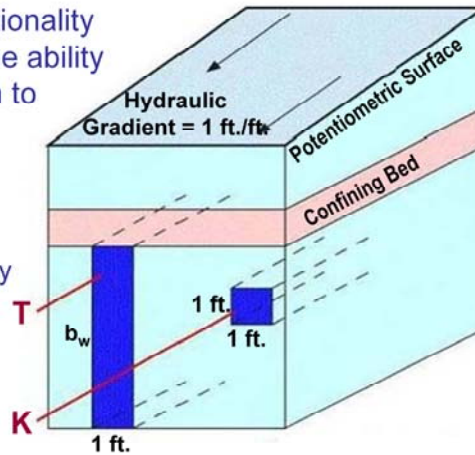

Modified from Driscoll (1989)

Borrowing a concept from groundwater hydrology.

T is the fluid discharge per unit width, per unit gradient, over the fluid-bearing interval.

## LNAPL Transmissivity – The New Standard for LNAPL Recoverability

**LNAPL Transmissivity** ( $T_n$ ) is a proportionality coefficient that represents the ability of a permeable medium to transmit LNAPL

$$q_n = K_n i_n$$

$$q_n b_n = K_n b_n i_n$$

$$Q_n = T_n i_n$$

$T_n$  represents *averaged* aquifer & fluid properties (soil permeability, density, viscosity, saturation) AND thickness of mobile LNAPL interval

$$T_n = K_n b_n \quad K_n = \frac{\rho_n \cdot g \cdot k}{\mu_n} k_{rn}$$

$T_n$  is an averaged indicator of recoverability

- $K_n$  varies with saturation



From Andrew Kirkman

Just like Darcy's Law, applied to LNAPL instead of water.

$q_n$  = LNAPL flow per unit area perpendicular to flow/gradient

$Q_n$  = LNAPL discharge per unit width perpendicular to flow/gradient

$i_n$  = LNAPL gradient

$b_n$  = LNAPL formation thickness

Transmissivity combines aquifer conditions, LNAPL saturation, and LNAPL properties into a single yardstick.

The graphic at the right shows both a soil core and a monitoring well under ultraviolet light.

The LNAPL conditions in the soil and well fluoresce.


The typical LNAPL saturation profile illustrates saturation over the vertical interval.

Highest LNAPL saturation has highest conductivity.

Low saturation = low conductivity


Hydraulic recovery is proportional to  $T$ , and is not indicated accurately by LNAPL well thickness

## Formation Thicknesses for Confined/Perched Conditions

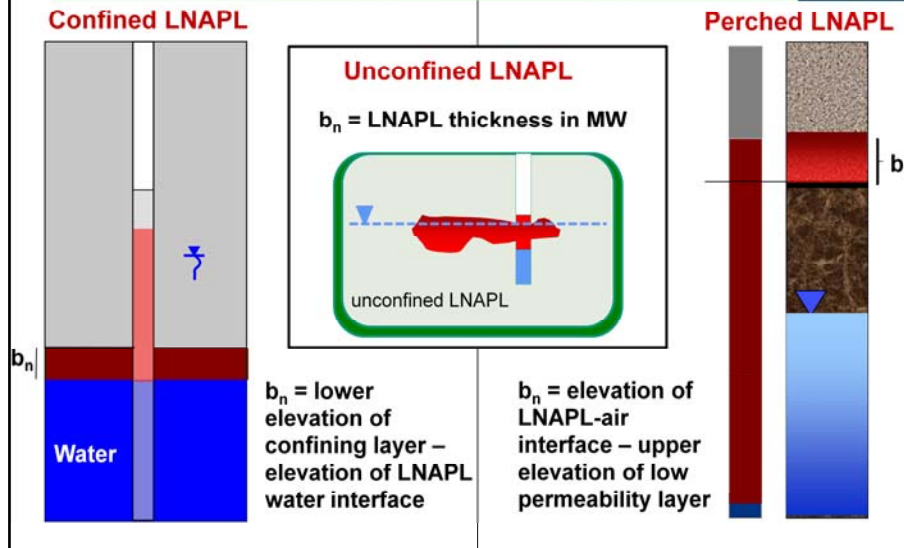

Choice of thickness depends on LNAPL condition.  
It should be the thickness of the LNAPL-bearing interval.  
Confined and perched.

## T<sub>n</sub> Values for Gasoline/Diesel

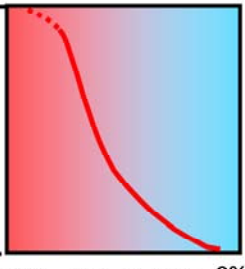USDA Soil Type	Saturated Hydraulic Conductivity (ft./day)	LNAPL Thickness (ft.)	T <sub>n</sub> gasoline (ft <sup>2</sup> /day)	T <sub>n</sub> diesel (ft <sup>2</sup> /day)	LNAPL-2 = 0.1 - 0.8 ft <sup>2</sup> /day T <sub>n</sub> modeled assuming homogenous soils
Medium Sand	100	1	8.5	0.2	
		2	58	2.4	
		5*	335	38	
Fine Sand	21	1	1.6	0.03	
		2	11	0.4	
		5*	67	7.4	
Sandy Loam	1.25	1	0.3	0.03	
		2	1.0	0.1	
		5	4.4	0.6	
Silt Loam	0.6	1	0.006	0.0	
		2	0.05	0.005	
		5	0.5	0.05	


This set of theoretical values of T shows a wide range of possible values.

At the lower end, recovery diminishes to insignificant rate, relative to what's left in the formation, and relative to other mass depletion processes.

## Residual Saturation and Transmissivity

- ▶ **“the oil that remains in an oil reservoir at depletion”**  
Pet. Eng. Handbook, 1987
- ▶ **“oil that remains after a water flood has reached an economic limit”**  
Morrow, 1987
- ▶ **“saturation at which the NAPL becomes discontinuous and is immobilized by capillary forces”**  
Schwille, 1984; Domenico and Schwartz, 1990; and Mercer and Cohen, 1990

**When LNAPL saturation approaches Residual Saturation, LNAPL Transmissivity approaches Zero**



From Wilson et al., (1990)



As T goes to low values, more of the LNAPL source zone is in a residually-saturated state (functionally immobile).

Like a sponge that has drained but is still wet.



## Knowledge Check

**Background:** A site has 7 ft. of LNAPL in a well. After a heavy rainfall season the LNAPL thickness increased to 9 ft.


**Question:** How would one make decision regarding recoverability?

- A. There is a lot of LNAPL at the site, and should be readily recoverable
- B. LNAPL is confined and does not need to be recovered
- C. Bail the LNAPL out and see how fast it recovers

Water table rises, LNAPL thickness increases.

## Key Message 8

### Causes for Sheens Not Necessarily LNAPL Migration

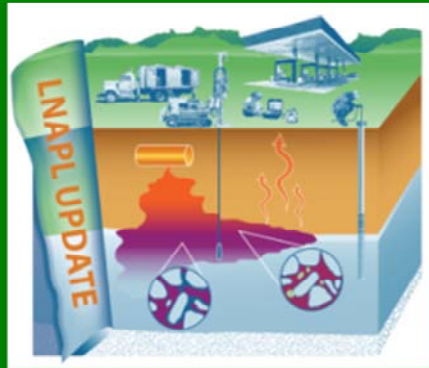

No associated notes.

85

## Petroleum Sheens

Originating from LNAPL in sediments at the groundwater surface water interface




Petroleum Sheens



Images: CH2M (2016)

No associated notes.

## Sheen Release Mechanisms

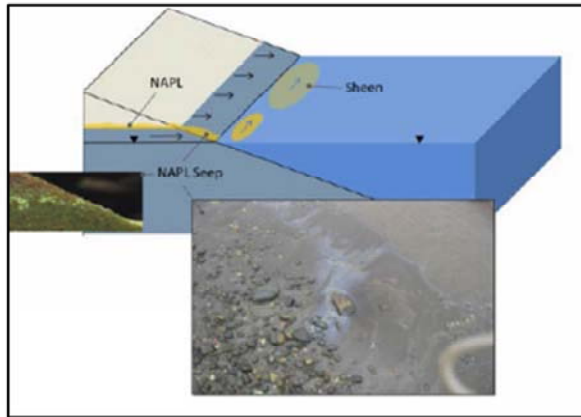


- 1. Seep:**  
Groundwater discharge carries LNAPL sheen

From Sale and Lyverse, 2014

No associated notes.

## Sheen Release Mechanisms

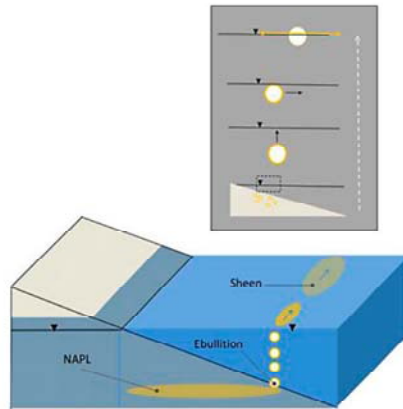

**2. Ebullition:**  
Gas generated from degradation carries LNAPL sheen




Photograph provided by Dr. Julio Zimbron, authorization to use by Author/Colorado State University

From Sale and Lyverse, 2014

No associated notes.

## Sheen Release Mechanisms

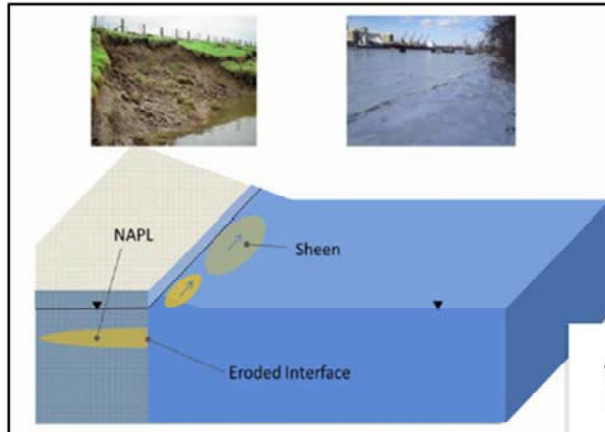

**3. Erosion:**  
Erosion of  
sediments with  
NAPL into water  
column

**Key Message:**  
transport of LNAPL  
to surface water is  
not necessarily  
gradient-driven


From Sale and Lyverse, 2014

No associated notes.



## Key Message 9

Biological processes are important

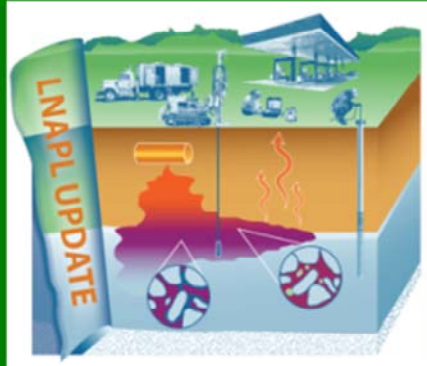


No associated notes.

## Biodegradation Capacity of Saturated-Zone Electron Acceptors

MNA focused on groundwater plume: how far and at what concentration

Typical Biodeg Capacity  
<~50 gal/ac/yr

Garg et al., 2017

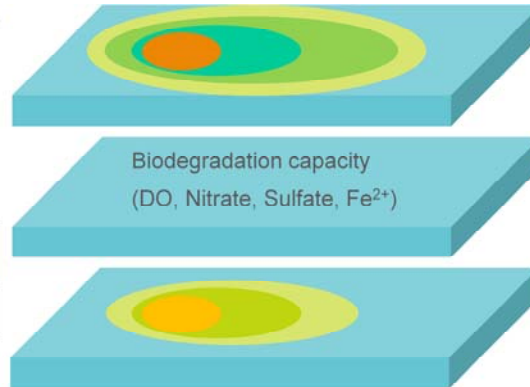

Source: Bioscreen documentation

**KEY POINT**

Electron acceptor mass-balance significantly underestimated LNAPL source zone biodegradation

MNA was understood before NSZD.

Incorrectly assumed that most biodegradation happened in the saturated zone.

## NSZD Rates Being Observed



NSZD Study	Site-wide NSZD Rate (gallons/ acre /year)
Six refinery & terminal sites (McCoy et al., 2015)	2,100 – 7,700
1979 Crude Oil Spill (Bemidji) (Sihota et al., 2011)	1,600
Two Refinery/Terminal Sites (LA LNAPL Wkgrp, 2015)	1,100 – 1,700
Five Fuel/Diesel/Gasoline Sites (Piontek, 2014)	300 - 3,100
Eleven Sites, 550 measurements (Palaia, 2016)	300 – 5,600

### KEY POINT

NSZD rates are in the range of 100s to 1000s of gallons/acre/year

Measured rates, based on CO<sub>2</sub> emissions, are much higher than expected based on dissolved phase fluxes alone. What is happening here?


## Need Vapor Flux Also

Baedecker et al., 1993

Mass transfer calculations indicated that the primary reactions in the anoxic zone are...and *outgassing of  $\text{CH}_4$  and  $\text{CO}_2$*

Molins et al., 2010

*"...the main degradation pathway can be attributed to methanogenic degradation of organic compounds ..."*

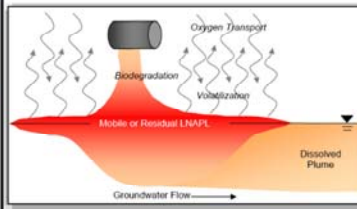

Amos & Mayer, 2006

*transfer of biogenically generated gases from the smear zone provides a major control on carbon balance*

Lundegard & Johnson 2006


*Mass loss associated with oxygen diffusion through the vadose zone is more significant (2 OOMs) than dissolution and biodegradation in the saturated zone*

Flux of vapors, and subsequent biodegradation of vapors and byproducts, is how most mass depletion occurs.

## NSZD Conceptual Model

### KEY PROCESSES

#### Surface Efflux

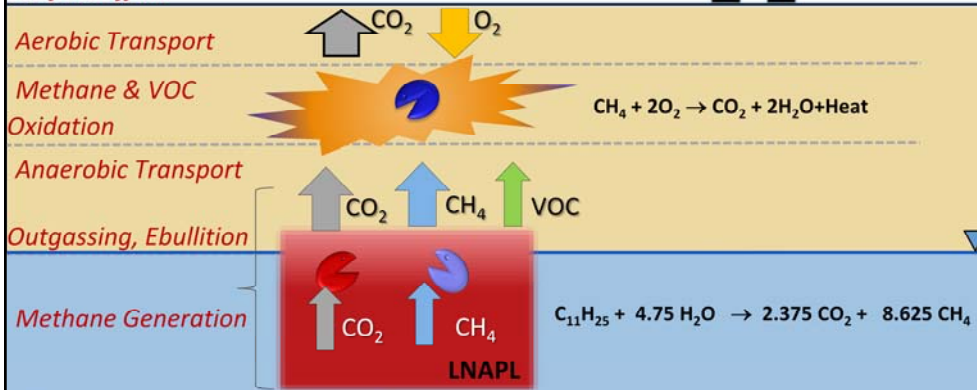



\*Note: size of arrows indicates magnitude of flux

Garg et al., 2017

- KEY POINT**
- Methanogenesis is a dominant process
  - NSZD focuses on source depletion: how long

Methane is generated by anaerobic degradation. Methane migrates upward and is aerobically oxidized. The methane oxidation zone can be near the water table, or higher, depending on the rate of CH<sub>4</sub> and VOC production, and also if there are shallow soil impacts.

## Direct Outgassing

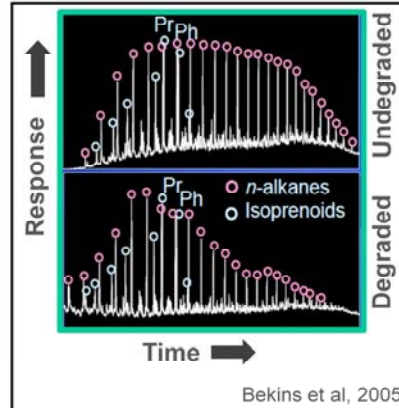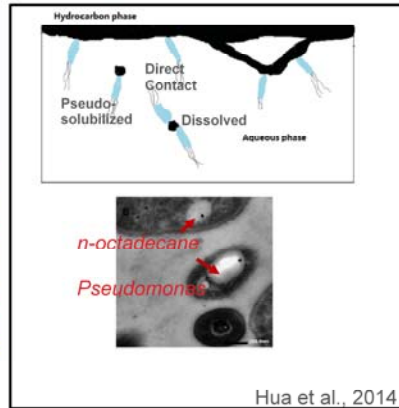

### KEY POINT

- Dissolution is not necessary for LNAPL biodegradation
- Biodegradation occurs in pore space near LNAPL

Hexadecane solubility:  $2.1 \times 10^{-5}$  mg/L = 0.02 ug/L

Tridecane solubility: 0.0047 mg/L = 4.7 ug/L

Octadecane:  $6.00 \times 10^{-3}$  mg/L = 6 ug/L


<https://pubchem.ncbi.nlm.nih.gov/compound/11635#section=Flash-Point>

LNAPL components need not be very soluble or volatile to be biodegraded.

Microbes will find them, and make a living wherever they can.




## It is All LNAPL!

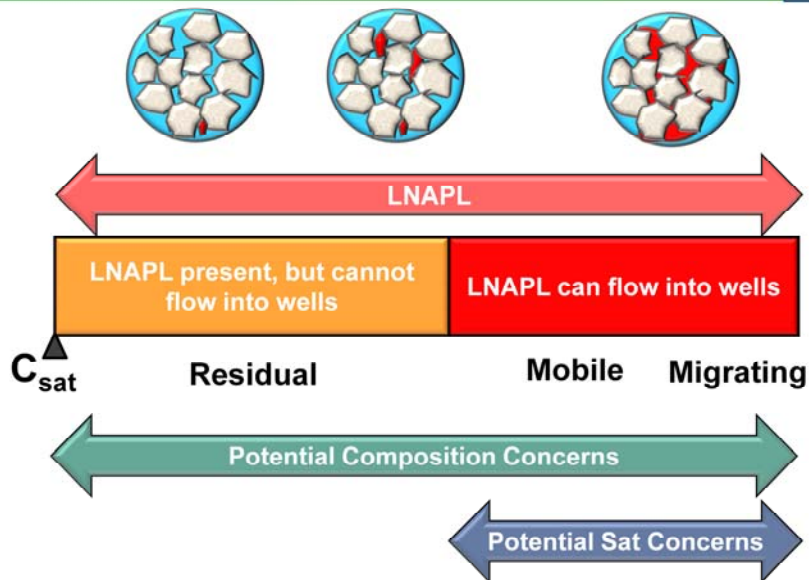

LNAPL exists in many conditions

# ITRC 3-Part Online Training Leads to YOUR Action

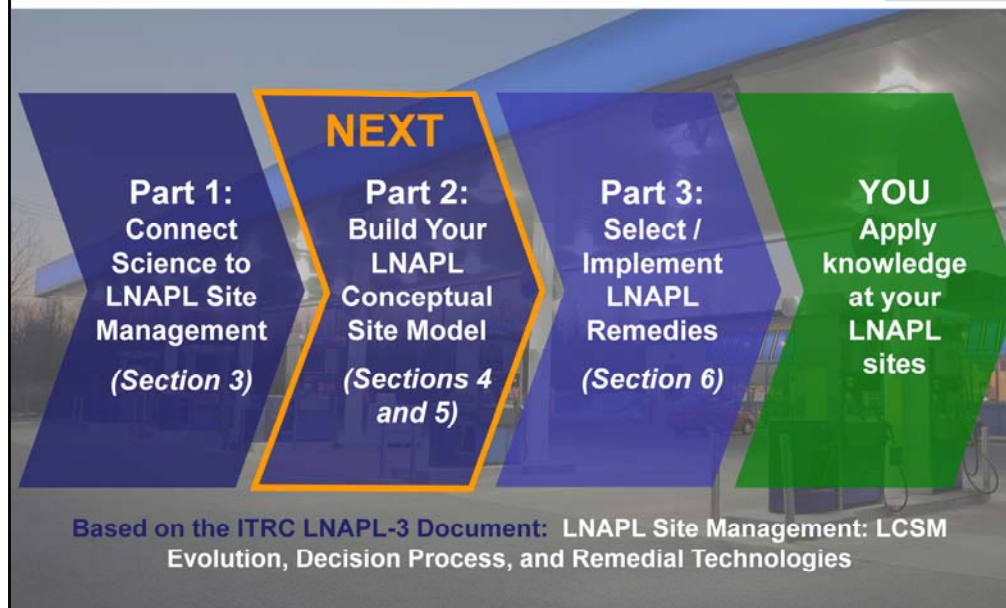

Our 3-part training series focuses on helping you:

- Connect Science to LNAPL Site Management
- Build your LNAPL Conceptual Site Model
- Select/Implement LNAPL Remedies

After this training the expectation is that you will have the skills and knowledge to use the ITRC science-based resources improve decision making at your LNAPL sites (and for you regulators and other government agency staff, look at ways you can incorporate ITRC states guidance into your own guidance).

Part 1: An Improved Understanding of LNAPL Behavior in the Subsurface - Connecting the Science to Managing Sites

- Explains how LNAPL behaves in the subsurface
- Examines what controls their behavior
- Explains what LNAPL data can tell you about the LNAPL and site conditions
- Relevant and practical examples are used to illustrate key concepts

Part 1 explains how LNAPLs behave in the subsurface and examines what controls their behavior. Part 1 also explains what LNAPL data can tell you about the LNAPL and site conditions. Relevant and practical examples are used to illustrate key concepts.

Part 2: LNAPL Conceptual Site Models and Remedial Decision Framework - Do you know where the LNAPL is and how to address LNAPL concerns?

•Addresses LNAPL conceptual site model (LCSM) development and the overall framework for making LNAPL remediation and management decisions

- Discusses key LNAPL and site data
- When and why those data may be important
- How to effectively organize the data into an LCSM

•Discusses how to resolve LNAPL concerns by selecting appropriate goals and objectives, choosing applicable technologies, and assigning remedial performance metrics and endpoints

•Concludes with a special focus on LNAPL Transmissivity and how it may be used to improve LNAPL decision making

Part 2 addresses LNAPL conceptual site model (LCSM) development as well as the overall framework for making LNAPL remediation and management decisions. Part 2:

discusses key LNAPL and site data  
when and why those data may be important, and  
how to effectively organize the data into an LCSM.

Part 2 also discusses how to resolve LNAPL concerns by selecting appropriate goals and objectives, choosing applicable technologies, and assigning remedial performance metrics and endpoints. Part 2 concludes with a special focus on LNAPL Transmissivity and how it may be used to improve LNAPL decision making.

Part 3: Using LNAPL Science, the LCSM, and LNAPL Goals to Select an LNAPL Remedial Technology

•Fosters informed remedial technology selection and appropriate technology application. Part 3:

- Discusses remedial technology groups
- Introduces specific remedial technologies
- Provides a framework for technology selection
- Introduces a series of tools to screen the several remedial technologies addressed in the updated ITRC document

•A case study demonstrates the use of these tools for remedial technology selection, implementation, and demonstration of successful remediation

Part 3 of the training fosters informed remedial technology selection and appropriate technology application. Part 3:

- discusses remedial technology groups,
- introduces specific remedial technologies,
- provides a framework for technology selection, and
- introduces a series of tools to screen the several remedial technologies addressed in the updated ITRC document.

A case study demonstrates the use of these tools for remedial technology selection,

implementation, and demonstration of successful remediation.

## Apply Part 1 on the Job



Apply What You Have Learned

- ▶ As you prepare to take Part 2 of the training series next week, think about how you can use the LNAPL science and key concepts presented today at your sites to develop your LCSM

No associated notes.

## Thank You

Follow ITRC



Poll Question

- ▶ 2nd Question and Answer Break
- ▶ Links to additional resources
  - <http://www.clu-in.org/conf/itrc/LNAPL-3/resource.cfm>
- ▶ Feedback form – *please complete*
  - <http://www.clu-in.org/conf/itrc/LNAPL-3/feedback.cfm>

View Your  
Participation  
Certificate (PDF)



Need confirmation of your participation today?

Fill out the feedback form and check box for confirmation email and certificate.

Links to additional resources:

<http://www.clu-in.org/conf/itrc/LNAPL-3/resource.cfm>

Your feedback is important – please fill out the form at:

<http://www.clu-in.org/conf/itrc/LNAPL-3/feedback.cfm>

### The benefits that ITRC offers to state regulators and technology developers, vendors, and consultants include:

- ✓ Helping regulators build their knowledge base and raise their confidence about new environmental technologies
- ✓ Helping regulators save time and money when evaluating environmental technologies
- ✓ Guiding technology developers in the collection of performance data to satisfy the requirements of multiple states
- ✓ Helping technology vendors avoid the time and expense of conducting duplicative and costly demonstrations
- ✓ Providing a reliable network among members of the environmental community to focus on innovative environmental technologies

### How you can get involved with ITRC:

- ✓ Join an ITRC Team – with just 10% of your time you can have a positive impact on the regulatory process and acceptance of innovative technologies and approaches
- ✓ Sponsor ITRC's technical team and other activities
- ✓ Use ITRC products and attend training courses
- ✓ Submit proposals for new technical teams and projects