



1

Welcome – Thanks for joining us.
 ITRC’s Internet-based Training Program



LNAPL Training Part 1:
An Improved Understanding of LNAPL Behavior in the Subsurface



State of Science vs. State of Practice

Sponsored by: Interstate Technology and Regulatory Council (www.itrcweb.org)
 Hosted by: US EPA Clean Up Information Network (www.cluin.org)

Light non-aqueous phase liquids (LNAPLs) are organic liquids such as gasoline, diesel, and other petroleum hydrocarbon products that are immiscible with water and less dense than water. LNAPLs are important because they are present in the subsurface at thousands of remediation sites across the country, and are frequently the focus of assessment and remediation efforts. A sound LNAPL understanding is necessary to effectively characterize and assess LNAPL conditions and potential risks, as well as to evaluate potential remedial technologies or alternatives. Unfortunately, many environmental professionals have a faulty understanding of LNAPL conditions based on outdated paradigms.

The ITRC LNAPLs Team is providing Internet-based training to improve the general understanding of LNAPLs. Better understanding leads to better decision making. Additionally, this training provides a necessary technical foundation to foster effective use of the forthcoming ITRC LNAPLs Team Technical Regulatory Guidance Document: Evaluating LNAPL Remedial Technologies for Achieving Project Goals (to be published in 2009).

This training course is relevant for new and veteran regulators, environmental consultants, and technically-inclined site owners and public stakeholders. The training course is divided into three parts:

LNAPL Training Part 1: An Improved Understanding of LNAPL Behavior in the Subsurface - State of Science vs. State of Practice - Part 1 explains how LNAPLs behave in the subsurface and examines what controls their behavior. Part 1 also explains what LNAPL data can tell you about the LNAPL and site conditions. Relevant and practical examples are used to illustrate key concepts.

LNAPL Training Part 2: LNAPL Characterization and Recoverability – Improved Analysis - Do you know where the LNAPL is and can you recover it? Part 2 addresses LNAPL characterization and site conceptual model development as well as LNAPL recovery evaluation and remedial considerations. Specifically, Part 2 discusses key LNAPL and site data, when and why those data may be important, and how to get those data. Part 2 also discusses how to evaluate LNAPL recoverability.


LNAPL Training Part 3: Evaluating LNAPL Remedial Technologies for Achieving Project Goals - uses the LNAPL conceptual site model (LCSM) approach to identify the LNAPL concerns or risks and set proper LNAPL remedial objectives and technology-specific remediation goals and performance metrics. The training course also provides an overview of the LNAPL remedial technology selection framework. The framework uses a series of tools to screen the seventeen remedial technologies based on site and LNAPL conditions and other important factors.

ITRC (Interstate Technology and Regulatory Council) www.itrcweb.org
 Training Co-Sponsored by: US EPA Technology Innovation and Field Services Division (TIFSD) (www.clu-in.org)
 ITRC Training Program: training@itrcweb.org; Phone: 402-201-2419

Housekeeping



- ▶ Course time is 2¼ hours
- ▶ Question & Answer breaks
 - Phone - unmute *6 to ask question out loud
 - Simulcast - ? icon at top to type in a question
- ▶ Turn off any pop-up blockers
- ▶ Move through slides
 - Arrow icons at top of screen
 - List of slides on left
- ▶ Feedback form available from last slide – **please** complete before leaving
- ▶ This event is being recorded

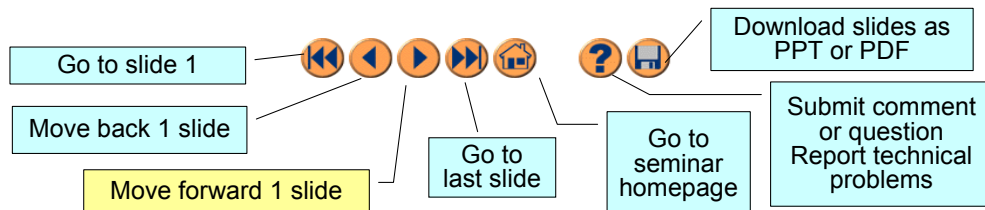

Copyright 2013 Interstate Technology & Regulatory Council,
50 F Street, NW, Suite 350, Washington, DC 20001

Although I'm sure that some of you are familiar with these rules from previous CLU-IN events, let's run through them quickly for our new participants.

We have started the seminar with all phone lines muted to prevent background noise. Please keep your phone lines muted during the seminar to minimize disruption and background noise. During the question and answer break, press *6 to unmute your lines to ask a question (note: *6 to mute again). Also, please do NOT put this call on hold as this may bring unwanted background music over the lines and interrupt the seminar.

You should note that throughout the seminar, we will ask for your feedback. You do not need to wait for Q&A breaks to ask questions or provide comments using the ? icon. To submit comments/questions and report technical problems, please use the ? icon at the top of your screen. You can move forward/backward in the slides by using the single arrow buttons (left moves back 1 slide, right moves advances 1 slide). The double arrowed buttons will take you to 1st and last slides respectively. You may also advance to any slide using the numbered links that appear on the left side of your screen. The button with a house icon will take you back to main seminar page which displays our presentation overview, instructor bios, links to the slides and additional resources. Lastly, the button with a computer disc can be used to download and save today's presentation slides.

ITRC Disclaimer



- ▶ This material was sponsored by an agency of the United States Government. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof and no official endorsement should be inferred.
- ▶ The information in ITRC Products was formulated to be reliable and accurate. However, the information is provided "as is" and use of this information is at the users' own risk. Information in ITRC Products is for general reference only; it should not be construed as definitive guidance for any specific site and is not a substitute for consultation with qualified professional advisors.
- ▶ ITRC Product content may be revised or withdrawn at any time without prior notice.
- ▶ ITRC, ERIS, and ECOS make no representations or warranties with respect to information in its Products. ITRC, ERIS, and ECOS will not accept liability for damages of any kind that result from acting upon or using this information.
- ▶ ITRC, ERIS, and ECOS do not endorse or recommend the use of specific technology or technology provider through ITRC Products.

This material was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof and no official endorsement should be inferred.

The information provided in documents, training curricula, and other print or electronic materials created by the Interstate Technology and Regulatory Council ("ITRC" and such materials are referred to as "ITRC Materials") is intended as a general reference to help regulators and others develop a consistent approach to their evaluation, regulatory approval, and deployment of environmental technologies. The information in ITRC Materials was formulated to be reliable and accurate. However, the information is provided "as is" and use of this information is at the users' own risk.

ITRC Materials do not necessarily address all applicable health and safety risks and precautions with respect to particular materials, conditions, or procedures in specific applications of any technology. Consequently, ITRC recommends consulting applicable standards, laws, regulations, suppliers of materials, and material safety data sheets for information concerning safety and health risks and precautions and compliance with then-applicable laws and regulations. ITRC, ERIS and ECOS shall not be liable in the event of any conflict between information in ITRC Materials and such laws, regulations, and/or other ordinances. The content in ITRC Materials may be revised or withdrawn at any time without prior notice.

ITRC, ERIS, and ECOS make no representations or warranties, express or implied, with respect to information in ITRC Materials and specifically disclaim all warranties to the fullest extent permitted by law (including, but not limited to, merchantability or fitness for a particular purpose). ITRC, ERIS, and ECOS will not accept liability for damages of any kind that result from acting upon or using this information.

ITRC, ERIS, and ECOS do not endorse or recommend the use of specific technology or technology provider through ITRC Materials. Reference to technologies, products, or services offered by other parties does not constitute a guarantee by ITRC, ERIS, and ECOS of the quality or value of those technologies, products, or services. Information in ITRC Materials is for general reference only; it should not be construed as definitive guidance for any specific site and is not a substitute for consultation with qualified professional advisors.

ITRC (www.itrcweb.org) – Shaping the Future of Regulatory Acceptance



- ▶ Host organization 
 - ▶ Network
 - State regulators
 - All 50 states, PR, DC
 - Federal partners





DOE DOD EPA
 - ITRC Industry Affiliates Program


 - Academia
 - Community stakeholders
- ▶ Wide variety of topics
 - Technologies
 - Approaches
 - Contaminants
 - Sites
 - ▶ Products
 - Technical and regulatory guidance documents
 - Internet-based and classroom training

The Interstate Technology and Regulatory Council (ITRC) is a state-led coalition of regulators, industry experts, citizen stakeholders, academia and federal partners that work to achieve regulatory acceptance of environmental technologies and innovative approaches. ITRC consists of all 50 states (and Puerto Rico and the District of Columbia) that work to break down barriers and reduce compliance costs, making it easier to use new technologies and helping states maximize resources. ITRC brings together a diverse mix of environmental experts and stakeholders from both the public and private sectors to broaden and deepen technical knowledge and advance the regulatory acceptance of environmental technologies. Together, we're building the environmental community's ability to expedite quality decision making while protecting human health and the environment. With our network of organizations and individuals throughout the environmental community, ITRC is a unique catalyst for dialogue between regulators and the regulated community.

For a state to be a member of ITRC their environmental agency must designate a State Point of Contact. To find out who your State POC is check out the "contacts" section at www.itrcweb.org. Also, click on "membership" to learn how you can become a member of an ITRC Technical Team.

ITRC Course Topics Planned for 2013 – More information at www.itrcweb.org



Popular courses from 2012

- ▶ Decision Framework for Applying Attenuation Processes to Metals and Radionuclides
- ▶ Development of Performance Specifications for Solidification/Stabilization
- ▶ Green and Sustainable Remediation
- ▶ Integrated DNAPL Site Strategy
- ▶ LNAPL 1: An Improved Understanding of LNAPL Behavior in the Subsurface
- ▶ LNAPL 2: LNAPL Characterization and Recoverability - Improved Analysis
- ▶ LNAPL 3: Evaluating LNAPL Remedial Technologies for Achieving Project Goals
- ▶ Mine Waste Treatment Technology Selection
- ▶ Project Risk Management for Site Remediation
- ▶ Use and Measurement of Mass Flux and Mass Discharge
- ▶ Use of Risk Assessment in Management of Contaminated Sites
- ▶ Soil Sampling and Decision Making Using Incremental Sampling Methodology (2 parts)
- ▶ Bioavailability Considerations for Contaminated Sediment Sites
- ▶ Biofuels: Release Prevention, Environmental Behavior, and Remediation

New in 2013

- ▶ Environmental Molecular Diagnostics
- ▶ Biochemical Reactors for Mining-Influenced Water
- ▶ Groundwater Statistics and Monitoring Compliance

2-Day Classroom Training on Light Nonaqueous-Phase Liquids (LNAPLs)

- ▶ April 9-10 in King of Prussia, PA
- ▶ June 4-5 in Springfield, IL
- ▶ October 1-2 in Garden Grove, CA

More details and schedules are available from www.itrcweb.org.

Meet the ITRC Instructors



Lily Barkau

Wyoming Department of Environmental Quality
Cheyenne, Wyoming
307-777-7541
lbarkau@wyo.gov



Ian Hers

Golder & Associates
Vancouver, British Columbia
604-298-6623
ihers@golder.com



Eric Nichols

ARCADIS
Newfields, New Hampshire
603-773-9779
eric.nichols@arcadis-us.com

Lily Barkau is an Environmental Project Manager with the Hazardous Waste Permitting and Corrective Action section of the State of Wyoming – Department of Environmental Quality (WY DEQ) in Cheyenne. She has worked at the WY DEQ since 2006. She reviews complex permit applications for technical adequacy; evaluates complicated environmental monitoring systems and data, determining whether releases of contaminants to the environment have occurred; reviews complicated site investigation work plans and reports; and takes actions to address releases to the environment. Previously, she worked for 5 years as a geologist/project manager at Earth Tech in Englewood, Colorado and has worked as a geologist for ThermoRetec, Tetra Tech EMI, and Barkau Engineering. She has been a member of the ITRC LNAPL team since the team started in 2007. Lily earned a bachelor's degree in geology from Wichita State University in Wichita, Kansas in 1998 and a master's degree in Environmental Science & Engineering from Colorado School of Mines in Golden, Colorado in 2004.


Ian Hers is a Senior Associate Engineer with Golder Associates located in Vancouver, British Columbia. He has 20 years professional experience in environmental site assessment, human health risk assessment and remediation of contaminated lands. Ian is a technical specialist in the area of LNAPL and DNAPL source characterization, monitored natural attenuation and source zone depletion, vapor intrusion, and vapor-phase in situ remediation technologies, and directs or advises on projects for Golder at petroleum-impacted sites throughout North America. He has developed guidance on LNAPL assessment and mobility for the BC Science Advisory Board for Contaminated Sites (SABCS) and the BC Ministry of Environment. Ian joined the ITRC LNAPL team in March 2008. Ian earned a doctoral degree in Civil Engineering from University of British Columbia in Vancouver, BC. He is on the Board of Directors of the SABCS, is a Contaminated Sites Approved Professional in BC, and is a sessional lecturer at the University of British Columbia.

Eric M. Nichols, PE, is the National Technical Manager for Remediation with ARCADIS US in Newfields, New Hampshire. He has worked for LFR (acquired by ARCADIS US) since 1996, and previously worked for Weiss Associates. He has characterized and remediated contaminated sites since 1985. Eric has taught short courses for several organizations, including the U.S. Environmental Protection Agency, the National Ground Water Association, the American Society for Testing and Materials, the New England Interstate Water Pollution Control Commission, the American Petroleum Institute, and the University of California Extension. Eric serves as a technical resource for LNAPL and fuel oxygenate characterization, remediation, source zone depletion, monitored natural attenuation, vapor intrusion, and litigation support. Prior to joining the LNAPL team, Eric developed guidance and training with the ITRC MTBE and Other Fuel Oxygenates Team. He has been a member of the ITRC LNAPL team since its inception in 2007, and co-authored the Technology Overview "Evaluating Natural Source Zone Depletion at Sites with LNAPLs" and the Technical/Regulatory Guideline "Evaluating LNAPL Remedial Technologies for Achieving Project Goals". Eric has received Industry Appreciation Awards for his service on the MTBE and LNAPL teams. Eric earned a bachelor's degree in Civil Engineering from the University of California, Berkeley, in 1982 and a master's degree in Civil Engineering from the Massachusetts Institute of Technology in 1985. He is a licensed professional engineer in California.

ITRC LNAPL Team



- ▶ ITRC LNAPL Team formed in July 2007
- ▶ Collaborative effort involving State and Federal Regulators, Consultants, Industry Representatives, and Stakeholders

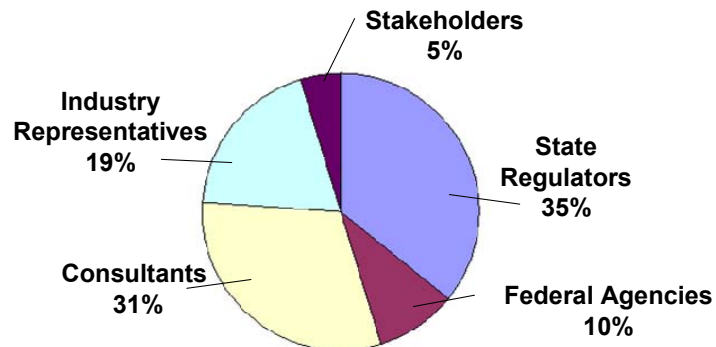

No associated notes.

Why did ITRC form an LNAPL Team?



- ▶ LNAPL is present at thousands of sites
- ▶ State regulatory agencies have a backlog of LNAPL sites that are not effectively approaching an endpoint, i.e., no further action (NFA)
- ▶ LNAPL poses technical and regulatory challenges
- ▶ For example, for leaking underground storage tank (LUST) sites, what does removal of free product to the maximum extent practicable mean?

No associated notes.

ITRC LNAPL Team – Documents and Training



- ▶ April 2009: Technology Overview document on LNAPL Natural Source Zone Depletion
- ▶ December 2009: LNAPL Technical/Regulatory Guidance document
- ▶ 2010 and on: LNAPL Internet-Based Training:
 - Part 1: LNAPL Behavior in the Subsurface
 - Part 2: LNAPL Characterization & Recoverability
 - Part 3: LNAPL Remedial Technologies
- ▶ 2011 and on: LNAPL Classroom Training

No associated notes.

- ▶ Understanding LNAPL Behavior in the Subsurface
 - Factors that control LNAPL distribution and behavior in the subsurface
 - LNAPL saturations greater than LNAPL residual saturation
 - LNAPL saturations less than LNAPL residual saturation

No associated notes.

ITRC LNAPL Internet-Based Training Part 2



- ▶ LNAPL Characterization and Recoverability
 - LNAPL Conceptual Site Model (LCSM)
 - Soil and LNAPL characteristics that influence LNAPL recovery
 - Evaluation of hydraulic LNAPL recovery
 - Goals and objectives
 - Remedial technologies

No associated notes.

ITRC LNAPL Internet-Based Training Part 3



- ▶ Remedial Technologies for LNAPL
- ▶ ITRC Tech/Reg - Evaluating LNAPL Remedial Technologies for Achieving Project Goals (December 2009)
 - LNAPL remedial decision making
 - LNAPL remedial technologies
 - LNAPL remedial technology screening and evaluation
 - Data requirements
 - Case studies

No associated notes.

ITRC LNAPL 2-day Classroom Training



▶ ITRC LNAPL classroom training started in 2011

- September 2011 in Minneapolis, MN
- April 2012 in Boston, MA
- October 2012 in Novi, MI



▶ Classes planned for 2013

- April 9-10, 2013 in King of Prussia, PA
- June 4-5, 2013 in Springfield, IL
- October 1-2, 2013 in Garden Grove, CA

**More information and registration at
www.itrcweb.org under "Training"**

No associated notes.

ITRC LNAPL Training – Part 1 LNAPL Behavior in the Subsurface



- ▶ Section 1: LNAPL definitions and LNAPL concerns
- ▶ Section 2: How LNAPL enters soil and groundwater
- ▶ Section 3: How LNAPL distributes vertically
- ▶ Section 4: How LNAPL moves



Modified from Schwille, 1988

No associated notes.

What Is LNAPL?

- ▶ NAPL = Non-Aqueous Phase Liquid
 - Do not mix with water and remain as a separate phase
 - Petroleum hydrocarbons and chlorinated solvents

- ▶ LNAPL = NAPL that is less dense than water
 - Gasoline, diesel fuel, jet fuel, and crude oil
 - Multi-component mixtures


- ▶ DNAPL = NAPL that is more dense than water
 - Chlorinated solvents – PCE, TCE, TCA
 - Single-component products
 - DNAPLs are not discussed in this course
 - See ITRC's website for information on DNAPL's




No associated notes.

LNAPL Saturation & Residual LNAPL Saturation

LNAPL Saturation (S_o) > Residual LNAPL Saturation (S_{or})




LNAPL Saturation (S_o) < Residual LNAPL Saturation (S_{or})



S_{or} = LNAPL that will not freely drain from the soil into a monitor well


No associated notes.

Simplified LNAPL Conceptual Site Model for a Gasoline Release to the Subsurface

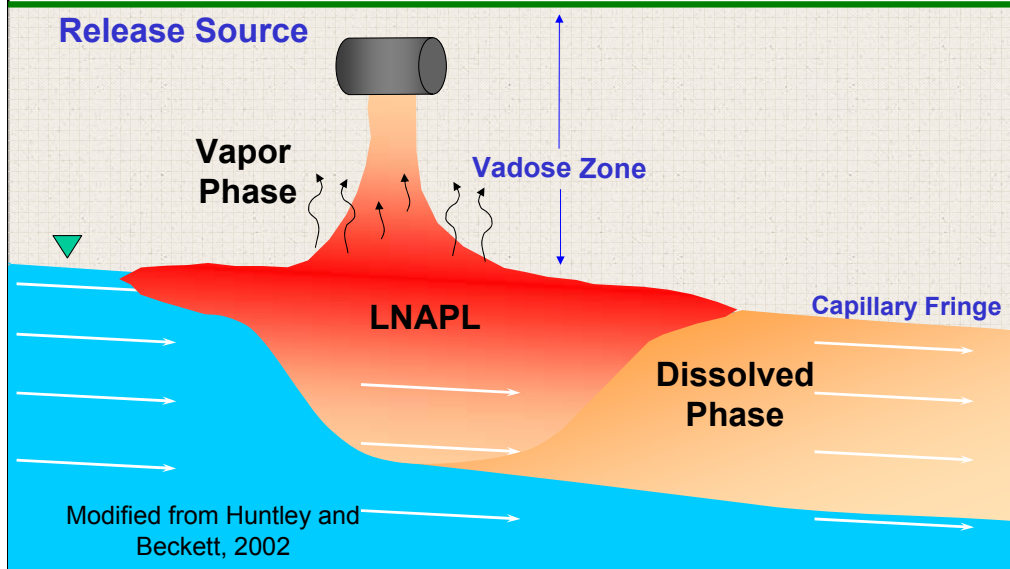

No associated notes.

Soil Pore-Scale LNAPL Distribution

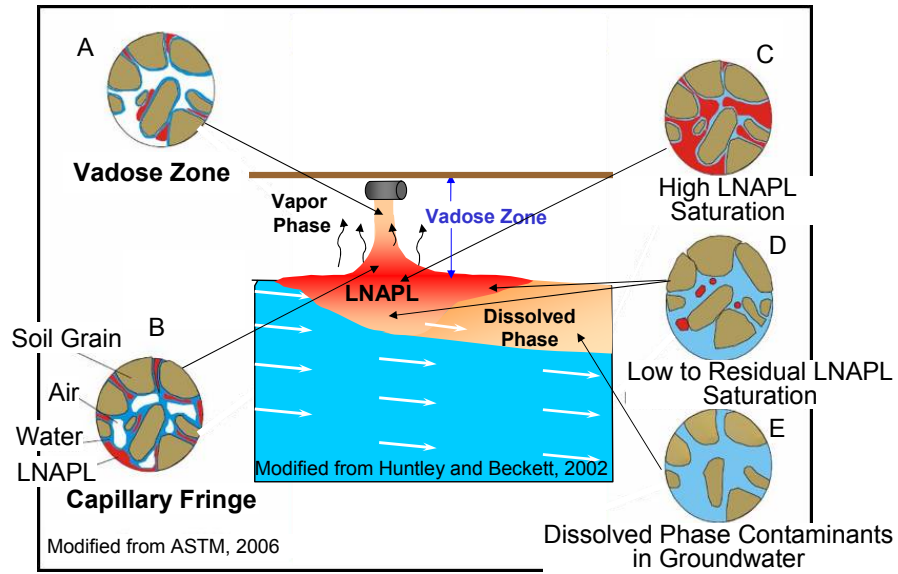

No associated notes.

Why are We Concerned about LNAPL?



- ▶ **What kind is it?**
 - **LNAPL composition concerns**
 - Flammability and explosion
 - Dissolved-phase plumes: Soluble components
 - Vapor Intrusion: Volatile components
 - (see ITRC Vapor Intrusion Guide)
 - Direct contact or ingestion – Toxic components
- ▶ **How much is there?**
 - **LNAPL saturation concerns**
 - LNAPL migrating into a new area and creating a risk
 - LNAPL seeping into utilities, basements, and surface waters
 - Longevity of dissolved-phase and vapor-phase plumes
 - Aesthetics
- ▶ **Where is it?**
 - Will be discussed in Part 2 – LNAPL Characterization and Recoverability

No associated notes.


LNAPL Regulatory Framework



- ▶ There is not a clear regulatory framework for dealing with LNAPL sites where most of the hydraulically-removable LNAPL has been removed
- ▶ LNAPL is not clearly addressed by RCRA, HSWA, or CERCLA regulations
- ▶ For LUST sites, 40 CFR 280.64 states in part: "...remove free product to the maximum extent practicable as determined by the implementing agency..."
- ▶ However, implementing agencies have different interpretations:
 - Remove all LNAPL to pre-release conditions
 - Remove to a measurable thickness, i.e., 1/8-inch
 - Remove to a site-specific/risk-based level
 - No clear requirements lead to endless do-loops

No associated notes.

21 What Do LNAPL Regulations Address Well?

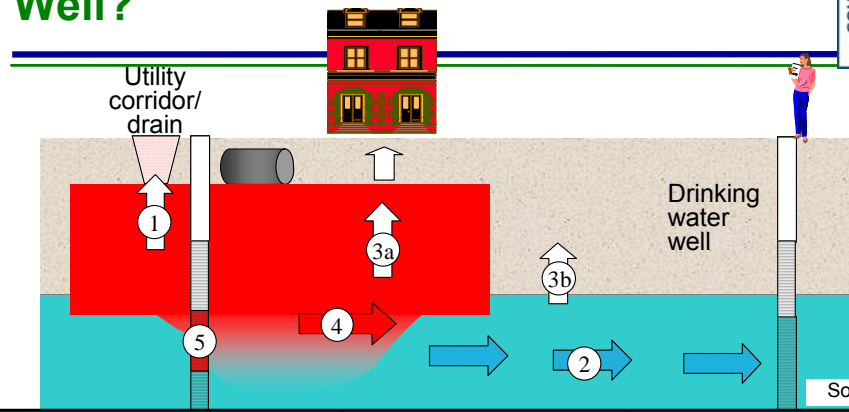

Source: Garg

LNAPL emergency issues are addressed well by standard regulations	Some LNAPL concerns are addressed well by standard regulations	Some LNAPL concerns are not addressed well by standard regulations
<p>Explosive vapors in confined spaces</p> <p>① Not shown - Direct LNAPL migration to surface water</p> <p>Not shown - Direct LNAPL migration to underground spaces</p>	<p>② Groundwater ingestion (dissolved phase MCLs)</p> <p>③a Vapor intrusion from LNAPL</p> <p>③b Vapor intrusion from contaminated groundwater</p> <p>Not shown - Direct skin contact</p>	<p>④ LNAPL migration potential (offsite migration, e.g. to surface water, under houses)</p> <p>⑤ LNAPL recoverability potential (aesthetic, regulatory)</p>

No associated notes.

Common (mis) Perceptions about LNAPL



- ▶ LNAPL enters the pores just as easily as groundwater
- ▶ You can recover all LNAPL
- ▶ All the pores in an LNAPL plume are filled with LNAPL
- ▶ LNAPL floats on the water table or capillary fringe like a pancake and doesn't penetrate below the water table
- ▶ Thickness in the well is exaggerated by a factor of 4, 10, 12, etc.
- ▶ LNAPL thickness in a well is always equal to the formation thickness
- ▶ If you see LNAPL in a well it is mobile and migrating
- ▶ LNAPL plumes spread due to groundwater flow
- ▶ LNAPL plumes continue to move over very long time scales



No associated notes.

Section 2 : How LNAPL Enters Soil and Aquifers

- ▶ Section 1: LNAPL definitions and concerns about LNAPL
- ▶ Section 2: How LNAPL enters soil and aquifers
- ▶ Section 3: How LNAPL distributes vertically
- ▶ Section 4: How LNAPL moves



Modified from Schwille, 1988

No associated notes.

Common (mis) Perceptions about LNAPL




- ▶ LNAPL enters the pores just as easily as groundwater
- ▶ You can recover all LNAPL
- ▶ All the pores in an LNAPL plume are filled with LNAPL
- ▶ LNAPL floats on the water table or capillary fringe like a pancake and doesn't penetrate below the water table
- ▶ Thickness in the well is exaggerated by a factor of 4, 10, 12, etc.
- ▶ LNAPL thickness in a well is always equal to the formation thickness
- ▶ If you see LNAPL in a well it is mobile and migrating
- ▶ LNAPL plumes spread due to groundwater flow
- ▶ LNAPL plumes continue to move over very long time scales



Slide 24

Misconception because common assumption is LNAPL pore entry is analogous to that of water. LNAPL and groundwater are generally similar but there are some differences/considerations that should be accounted for during multi-phase flow:, e.g., relative permeability and pore entry pressure. These are discussed later in this presentation.

LNAPL Plume Spreading

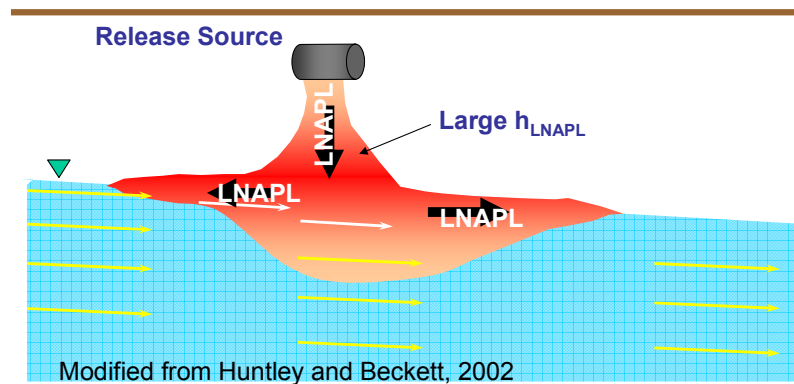

- ▶ LNAPL must displace existing fluids (air, water) filling a soil pore
- ▶ It is easier for LNAPL to displace air than water

Slide 25


The LNAPL must displace fluids existing in the pores to enter the soil pore

LNAPL needs to displace air from vadose-zone pores and water from saturated-zone pores


LNAPL distributes itself vertically at and under the water table and also spreads laterally

Both aspects – vertical distribution and lateral migration – are discussed in this presentation

“Resistance” to Movement of LNAPL into and Out of Water-saturated Soil Pores

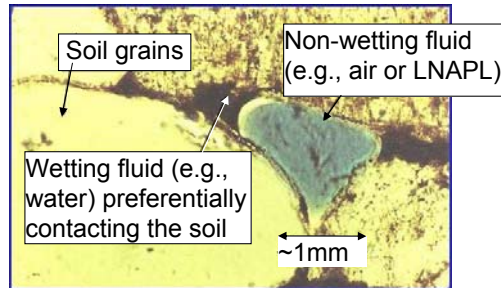

For water wet media

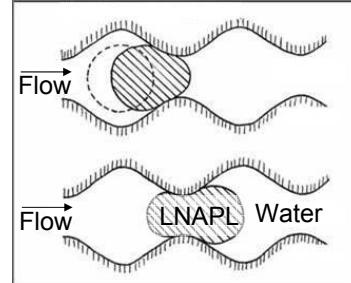


- ▶ LNAPL will only move into water-wet pores when entry pressure (resistance) is overcome
 - To distribute vertically and to migrate laterally

Slide 26

It takes pressure for LNAPL to move into or out of pores. LNAPL may encounter pore throats that are smaller than the droplet size. Sufficient pressure must be exerted to deform the droplet in order for it to move through the pore throat.

In the upper right figure, the pressure gradient is too low to deform the LNAPL droplet and allow it to move through the pore throat. In the lower figure, the pressure is sufficient to deform the droplet and make it mobile. In this scenario, the LNAPL is recoverable. Difficulty in overcoming the pressure gradient is the reason why LNAPL fills the large pores first in a water-wet soil. It is also why some LNAPL is trapped in the pores during recovery and cannot be removed using hydraulic recovery methods, such as pump-and-treat.

How is a Water-Filled Pore Resistant to LNAPL Entry?

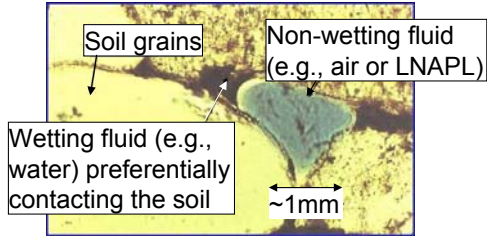

Displacement head for LNAPL entry into water-filled pores

$$h_{Nc} = \frac{2\sigma \cos \phi}{r(\rho_w - \rho_o)g}$$

h_{Nc} = displacement head for LNAPL-water system, the LNAPL head required to displace water from water-filled pores

Parameter	Parameter trend	h_{Nc}	LNAPL potential to enter water-filled pore
Water/LNAPL interfacial tension (σ)	↑	↑	↓
Wettability (wetting fluid contact angle) $\cos \phi$	↑	↑	↓
Pore size (r)	↑	↓	↑
LNAPL density (ρ_o)	↑	↑	↓


Key Point: Higher h_{Nc} means its harder for LNAPL to displace water from pores

Slide 27

Slide has force balance equation for a capillary tube. Parameters and effect is shown in table.

Real Site Capillary Pressure (Moisture Retention) Curves

- ▶ In practice, capillary pressure curves are used to determine displacement head

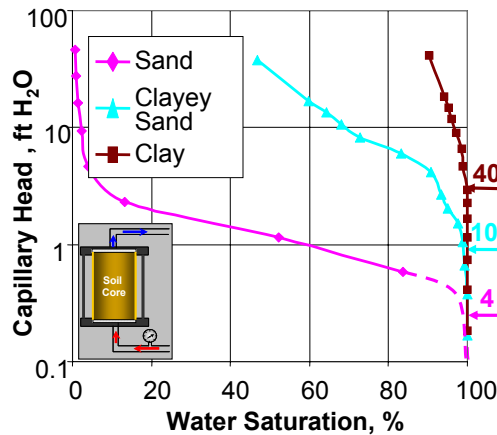

- Clay holds water more tightly
 - Difficult for LNAPL to enter water-filled pores
- Sand holds water less tightly
 - LNAPL more easily displaces water to occupy the pore

This graph is for an air-water system, but can be scaled for application to an LNAPL-water system

Displacement head (h_{dn}) refers to LNAPL-water system in subsequent slides

Key Point: Hard for LNAPL to displace water from finer-grained pores

Easier Water Displacement - Harder

Displacement head for non-wetting fluid = capillary rise in a water-air system = h_{da}

Slide 28

In practice, capillary pressure curves are used to determine displacement head. It is a lab measurement where a non-wetting fluid is used to displace a wetting fluid (water) from a soil core.

The results can be scaled or adjusted for any pair of fluids based on fluid properties. There are databases and software available (e.g., API) that have the necessary parameters to develop these curves.

Pore entry pressure for air had is also equal to the height of capillary fringe in an air-water system

hd is conceptually same as hNC but based on a field measurement for a soil type and air and water

How Displacement Head Affects Lateral Migration and Vertical Distribution



- ▶ Displacement head affects both the vertical distribution and the lateral migration of LNAPL
- ▶ Can explain why LNAPL bodies stabilize over time
- ▶ LNAPL needs to displace existing fluids to enter a pore
 - Easier for LNAPL to displace air (vadose zone) than water (saturated zone)

Slide 29

Displacement head is relevant because LNAPL needs to get into the pores in the first place to distribute vertically or migrate laterally.

Easier to cleanup spilt oil with a dry sponge versus a wet sponge – example of displacing air versus water by LNAPL.

Summary of section – nonwetting fluids have a pore entry pressure.

Section 3 : How LNAPL Distributes Vertically

- ▶ Section 1: LNAPL definitions and concerns about LNAPL
- ▶ Section 2: How LNAPL enters soil and aquifers
- ▶ Section 3: How LNAPL distributes vertically
- ▶ Section 4: How LNAPL moves




Modified from Schwille, 1988

Common (mis) Perceptions about LNAPL


- ▶ LNAPL enters the pores just as easily as groundwater
- ▶ You can recover all LNAPL
- ▶ All the pores in an LNAPL plume are filled with LNAPL
- ▶ LNAPL floats on the water table or capillary fringe like a pancake and doesn't penetrate below the water table
- ▶ Thickness in the well is exaggerated by a factor of 4, 10, 12, etc.
- ▶ LNAPL thickness in a well is always equal to the formation thickness
- ▶ If you see LNAPL in a well it is mobile and migrating
- ▶ LNAPL plumes spread due to groundwater flow
- ▶ LNAPL plumes continue to move over very long time scales



Vertical LNAPL Distribution

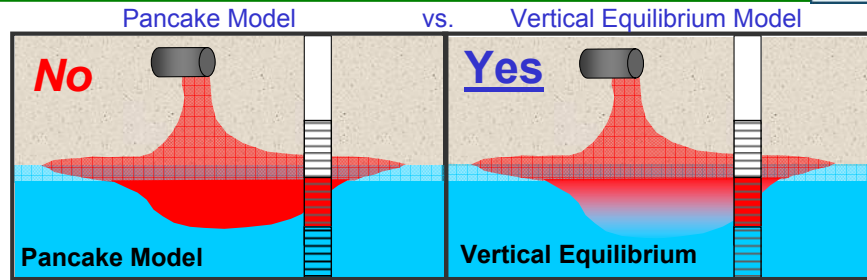

- Assumes LNAPL floats on water table
- Uniform LNAPL saturation

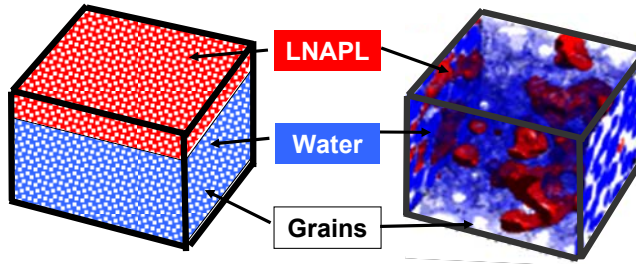


- LNAPL penetrates below water table
- LNAPL and water coexist in pores

Slide 32

Left: Old model is the pancake model. All pores are filled with LNAPL.

Right: Reality. LNAPL and water coexist in the pore space and the relative saturations of water and LNAPL varies with depth. The pressure varies with depth and thus there is a different saturation of LNAPL at each point vertically.

Saturation Distribution is Determined by Capillary Pressure - 1

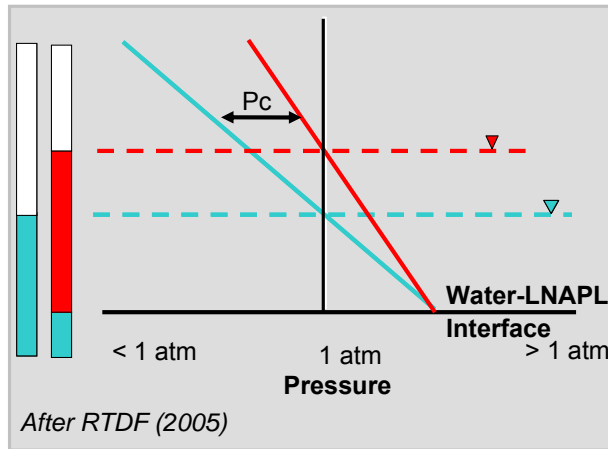

P_c = non wetting pressure – wetting phase pressure

Key Point: Capillary pressure highest at LNAPL-air interface and zero at water-LNAPL interface

Slide 33


Blue Inclined Line: Water pressure line. 1 atm at the water table. Wetting Fluid.

Red Inclined Line: LNAPL pressure line. 1 atm at the LNAPL table. Non wetting fluid

Capillary pressure is defined as the difference between the pressures of the nonwetting (i.e. LNAPL) and the wetting fluid (i.e., water).

Capillary pressure is maximum at the top of the LNAPL and zero at the bottom of the LNAPL column.

Saturation Distribution is Determined by Capillary Pressure - 2

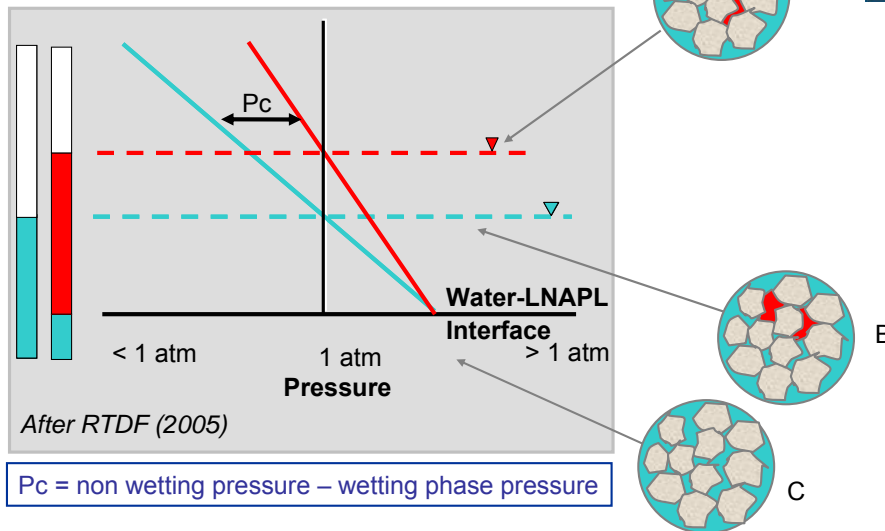


Key Point: Higher the capillary pressure,
the higher the LNAPL saturation

Slide 34

The 3 panes have different amount of LNAPL because of different capillary pressures at each point. Maximum LNAPL is where capillary pressure was highest in the previous slide.

Saturation Distribution is Determined by Capillary Pressure - 3

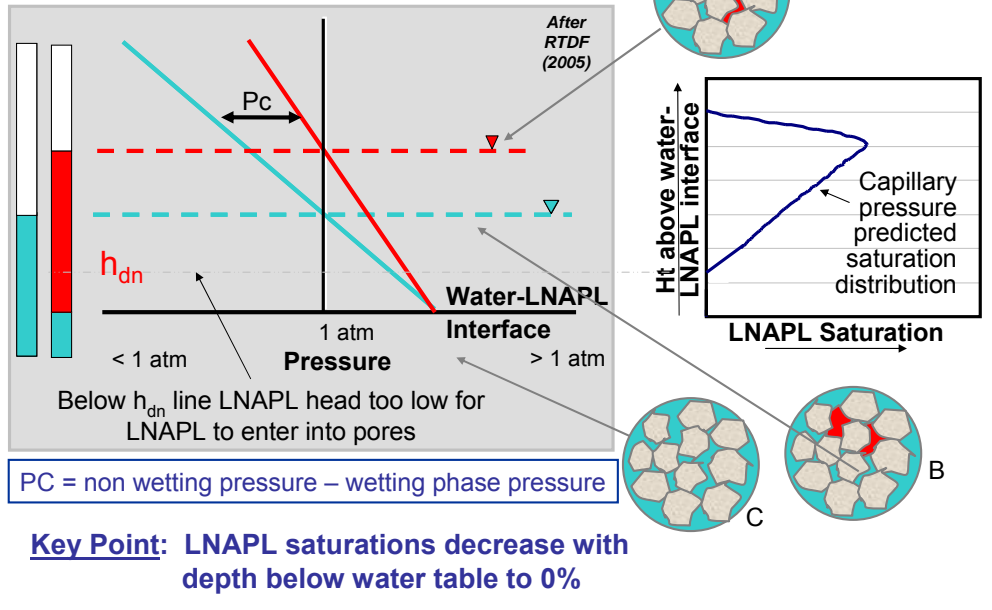


Slide 35

The actual shape of the sharkfin is arrived at by using the (i) capillary pressure curve (refer to slide 30) and (ii) the pressure distribution (the distance between the blue and the red lines above).


There are several tools that can generate these curves, e.g., API Interactive Guide and the API LDRM

Definition of Specific Volume

Schematic Boring

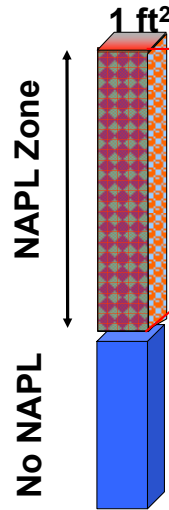

What is in the soil column?



Specific volume is the volume of LNAPL that would exist within a boring 1 ft² in area over the full vertical interval of LNAPL presence (units = volume/area)


Slide 36

Specific volume: volume of LNAPL per unit area of land

Integrate all LNAPL impacts observed vertically in a core = area under the sharkfin*porosity

Volume includes total LNAPL (both recoverable and non-recoverable)

Grain Size Effects on LNAPL Saturation Distributions (Vertical Equilibrium Model)

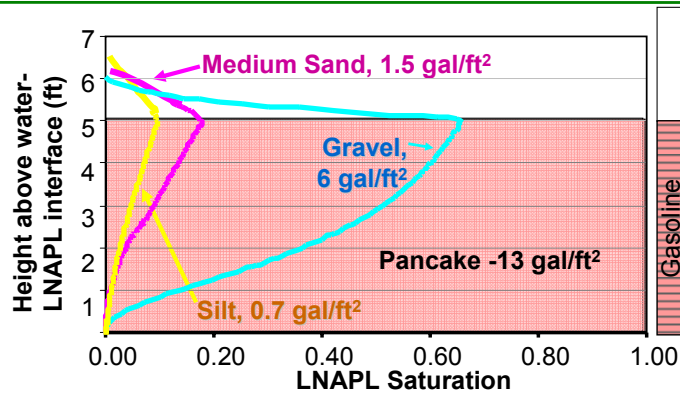

Key Point: Volumes based on pancake model (uniform saturations) are over estimated!

For a given LNAPL thickness, LNAPL saturations and volumes are different for different soil types (greater for coarser-grained soils)

Slide 37

Graph shows volume estimates for different soil types for a given LNAPL thickness in the well.


Volume of gasoline via pancake = LNAPL thickness in well x porosity

Volume of gasoline = area under the curve x porosity

Pancake over-predicts volume and the over-prediction gets more and more significant as grain size becomes smaller.

LNAPL thickness is same for all cases → capillary pressure distribution is same, but pore sizes are different. Therefore, different sharkfins for different soils even though well thickness is the same.

Inference from LNAPL Thickness in a Well on Relative Saturation in Silty Sand

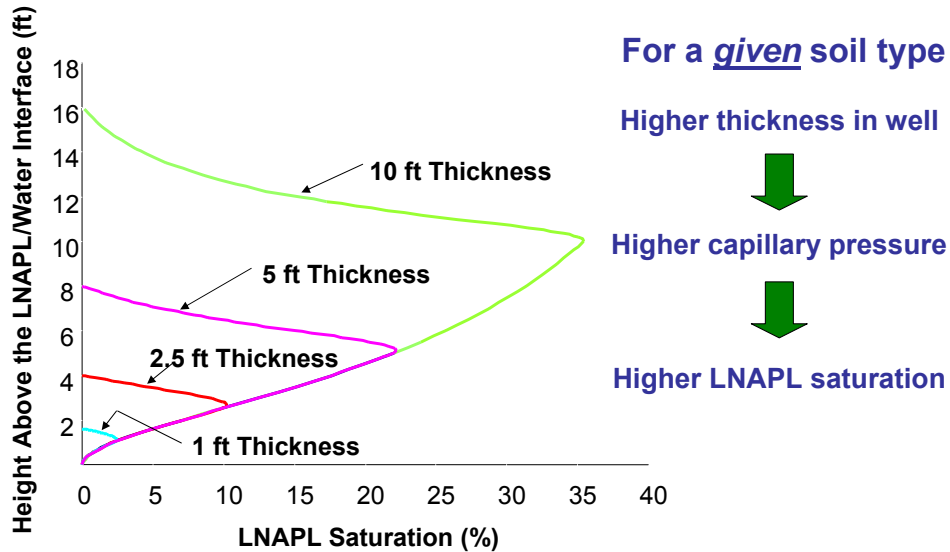


Slide 38

This slide illustrates that LNAPL (diesel fuel) saturation distributions vary in silty sand with differing LNAPL thicknesses measured in monitoring wells. We can see that for a 10-ft thickness of diesel fuel in a monitoring well, the maximum saturation in silty sand is predicted to be about 36%. If the diesel fuel thickness were 1 foot, the maximum saturation would be predicted to be less than 5%.

In summary, if we have capillary pressure curves and homogeneous media and know the LNAPL thicknesses measured in monitoring wells and the fluid properties, we can estimate the saturations of LNAPL in media of various grain sizes.

If keep adding LNAPL mass, the saturation will reach a maximum ($\ll 100\%$, 1 - irreducible water saturation), above which volume will increase, but the saturations will remain constant at that maximum.

Measured and Modeled Equilibrium LNAPL Saturations

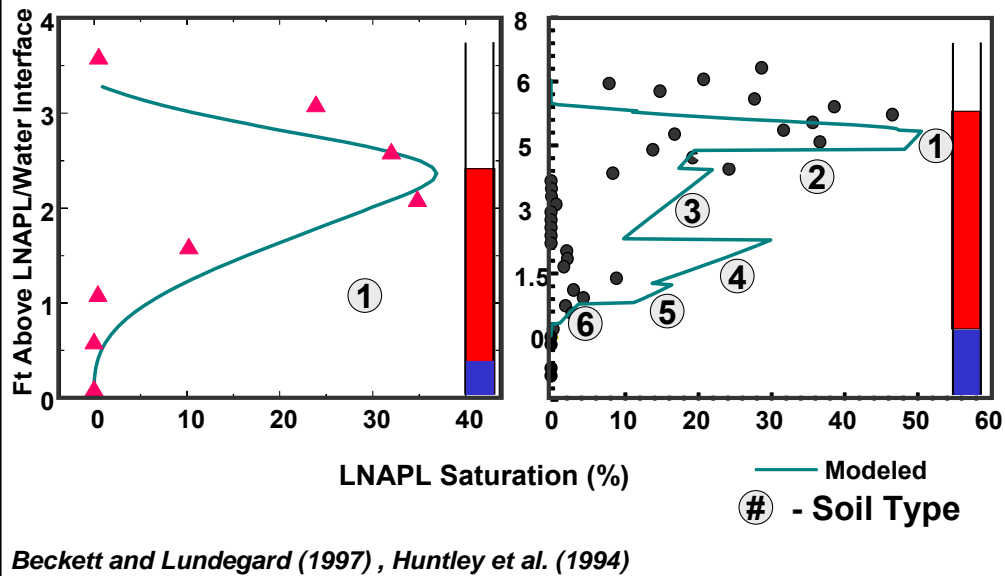

Slide 39

Symbols are data. Lines are calculations.

Left panel has homogeneous soil. Right panel has 6 soil types.


Model predictions have a good match for the homogeneous soil. Reasonable match for the heterogeneous case.

Important to know geology and other factors like water table fluctuations if calculating profile.

Key point: LNAPL Saturation is never 1 and varies.

LNAPL Saturations Are Not Uniform

- ▶ LNAPL preferentially enters larger pores (easier to move water out of the pore)
- ▶ Maximum LNAPL saturations typically low (5-30%) in sands (can be higher at new release or constant release)
- ▶ Saturations even lower for finer-grained sediments

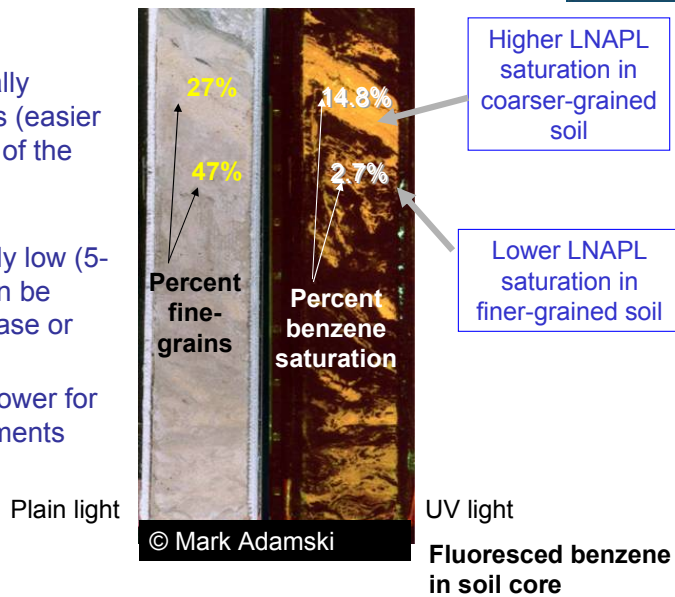


Slide 40

Photographs under white light and ultraviolet light

Varying saturations due to grain size and/or depth

Analogy to LNAPL Body

- ▶ More LNAPL mass in the core (greater thickness)
- ▶ Less LNAPL mass at the perimeter (less thickness)

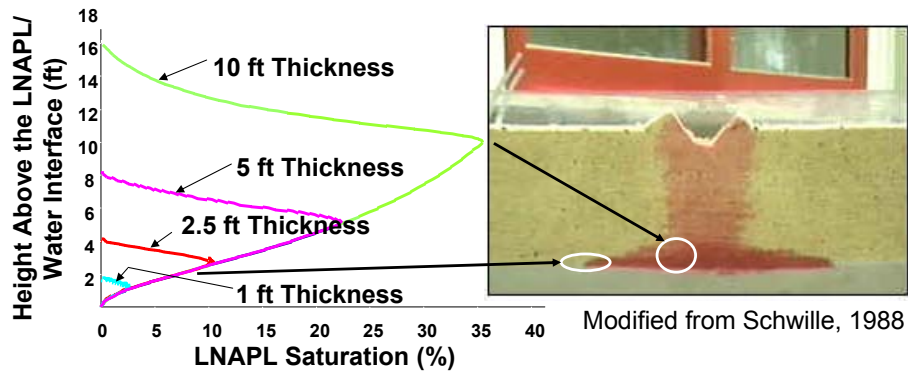

Slide 41

NAPL plume core has higher thickness and a corresponding larger sharkfin as compared to the plume edge.

Pancake vs. Vertical Equilibrium Model



Why important?

- ▶ Pancake concept results in overestimation of LNAPL volumes based on thickness observed in a well
- ▶ LNAPL generally does not occur as a distinct layer floating on the water table at 100% or uniform LNAPL saturation
- ▶ Unrealistic expectations of recovery due to incorrect site conceptual model
 - Uniform saturations
 - Uniform LNAPL distributions

Slide 42

Same thickness in a well could mean a completely different mass (and mobility, which will be discussed later) in a gravel versus a clay.


A good understanding of the vertical distribution of LNAPL can help with getting a good estimate of the size of the problem and to focus remedial efforts on the right zone.

LNAPL Volume Estimates



- ▶ To understand the scale of the problem
- ▶ May not be necessary at all sites
 - Necessity and rigor of estimate depends on site-specific drivers
- ▶ Total volume includes recoverable LNAPL and residual LNAPL
- ▶ Tend to be order of magnitude estimates

An Example Volume Estimation Technique

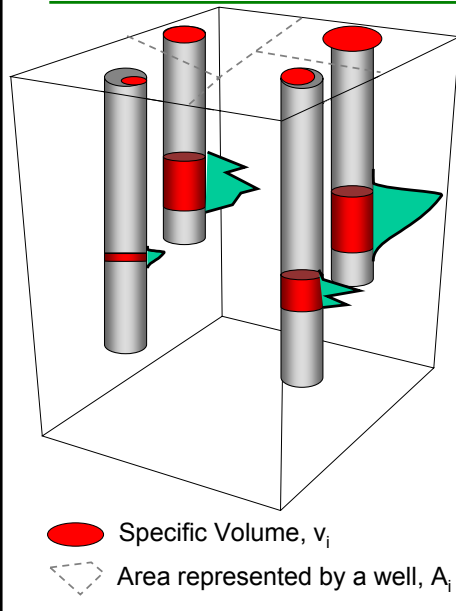

- ▶ Establish saturation profile at each location
 - Measured or modeled
- ▶ Estimate the LNAPL specific volume at each location
 - v_1, v_2, v_3, v_4
- ▶ Assign representative areas for each boring/well
 - A_1, A_2, A_3, A_4
- ▶ Calculate volume in each representative area
 - $A_1v_1; A_2v_2; A_3v_3; A_4v_4$
- ▶ Integrate to obtain total volume
 - $A_1v_1 + A_2v_2 + A_3v_3 + A_4v_4$

Slide 44

Other methods include

e.g., (1) 3-d interpolation of LNAPL saturation data

(2) Contouring using any standard software. Will need some post-processing to get volume from contours.

Question and Answer Break



Vertical Equilibrium Exceptions

Common (mis) Perceptions about LNAPL



- ▶ LNAPL enters the pores just as easily as groundwater
- ▶ You can recover all LNAPL
- ▶ All the pores in an LNAPL plume are filled with LNAPL
- ▶ LNAPL floats on the water table or capillary fringe like a pancake and doesn't penetrate below the water table
- ▶ Thickness in the well is exaggerated by a factor of 4, 10, 12, etc.
- ▶ LNAPL thickness in a well is always equal to the formation thickness
- ▶ If you see LNAPL in a well it is mobile and migrating
- ▶ LNAPL plumes spread due to groundwater flow
- ▶ LNAPL plumes continue to move over very long time scales




Slide 47

Well thickness is not always equal to formation impacts. Some examples follow.

Example Seasonal LNAPL Redistribution

LNAPL Monitoring Over Time Refinery

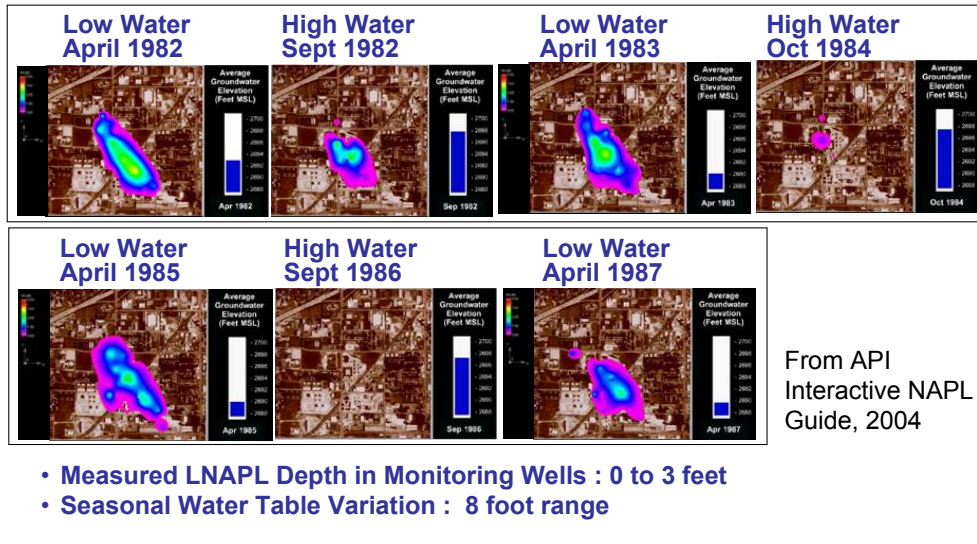


Slide 48



The attached movie stills illustrate a diesel plume in a gravelly sand aquifer that is characterized by seasonal water table fluctuations. The extent and product thickness were measured from over 50 wells across the site from April 1982 to April 1987. The apparent well product thickness measurements range from 0 to 4 feet. The groundwater level fluctuates approximately 8 feet seasonally. The blue gauge on the right side of the picture provides the average water level, and the legend in the upper left hand portion of the picture documents the LNAPL plume thickness. The movie clearly illustrates the influence of water table fluctuations in trapping LNAPL as water floods the oil profile and in the subsequent drainage of LNAPL from the unsaturated zone. During the time period of the movie, recovery systems were operational, which resulted in the continual loss of product from the aquifer.

Video at: [Link](#)

LNAPL Thickness in Well vs. Water Table Elevation (Unconfined Conditions)

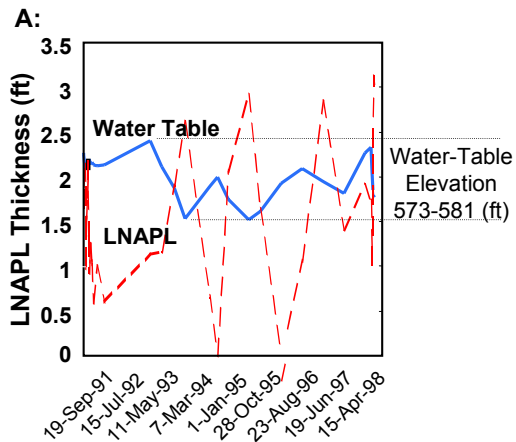

Three different types of graphs to show same kind of information → LNAPL thickness increase with water table drops

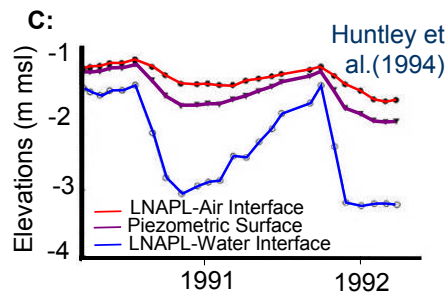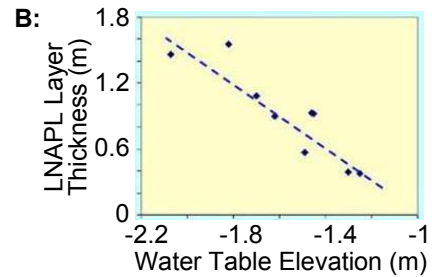

Slide 49


Panel A shows a temporal graph with Time on the x axis and LNAPL thickness and water table elevation on the two y axes. The red line is the measured thickness of LNAPL in the monitoring well. The blue line represents the change in water table elevation.

Panel B shows GW elevation plotted against LNAPL thickness.

Panel C shows elevations of the top of LNAPL in red, LNAPL-Water interface in blue and the piezometric surface in purple. As the piezometric surface goes up the LNAPL thickness, which is the distance between the red and blue lines, goes down

What is usually observed here in all hydrographs is that, when the water table elevation decreases, the LNAPL thickness in the monitoring well increases, and vice versa. While changes in the measured LNAPL thickness often are attributed to a redistribution of LNAPL in the aquifer as the water-table elevation changes, this is only part of the story. Two phenomena cause this:

Why does the LNAPL Thickness in a Well Increase When the Water Table Drops?

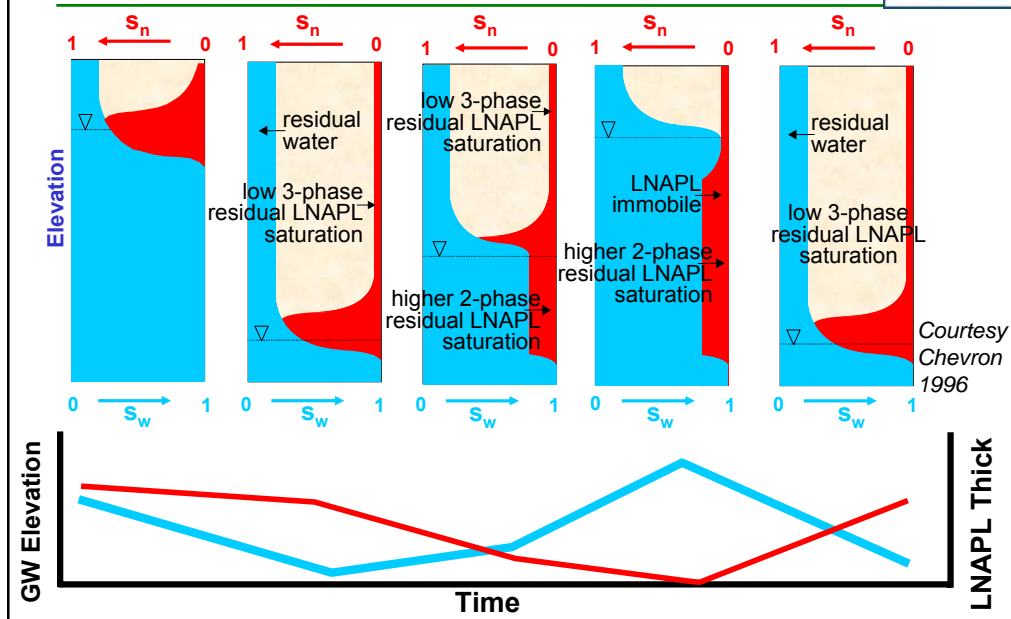

Slide 50

Phenomenon 1: Vertical redistribution of LNAPL (shown in panels above)

Frame 1: LNAPL present in a well at any time 0.

Frame 2: Water table drops with LNAPL creating smear zone in soil.

Frame 3: Water table rises, entrapping LNAPL in the soil.

Frame 4: At water table maximum, LNAPL may be entirely entrapped.


Frame 5: As water table declines, LNAPL drains from soil.

Phenomenon 2:

Flow of LNAPL into/out of the well from/to the soil.

Reference: Kemblowski and Chiang Groundwater in 2000.

Residual LNAPL Saturation – Higher in Saturated Zone than in Vadose Zone

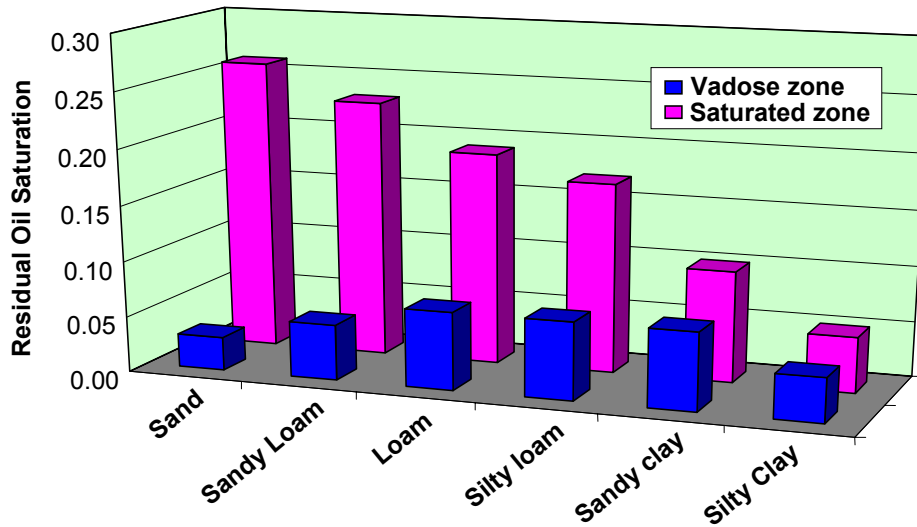

Example ranges from Parker et al., 1989


Slide 51

Residual saturations in vadose zone are lower than those in the saturated zone

Easier to recover from a 3-phase system – this is why lowering of the water table may help LNAPL recovery

But if dewatering clay or silty clay, still will not get much LNAPL (little difference in the saturated zone and vadose zone residual saturations)

LNAPL Thickness in Well Increases with Increase in Water Level? Bottom Filling of Well

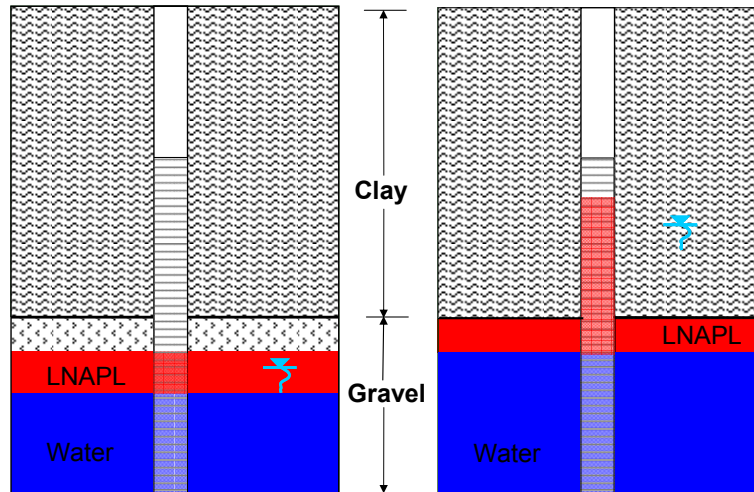

Monitoring well is a giant pore!


Slide 52

Left side: LNAPL in unconfined condition. Thickness in well is similar to that in the formation. Water table fluctuation will have an inverse relationship to the LNAPL thickness.

Right side: LNAPL/aquifer under confined condition. As the piezometric surface rises, the confining pressure on the LNAPL rises, resulting in an increased thickness in the well. That is, an increase in piezometric surface results in increase in LNAPL thickness under confined conditions.

LNAPL Thickness versus Potentiometric Surface Elevation (Confined Conditions)

Confined systems have matched potentiometric surface and LNAPL thickness response (must factor in density ratio of the two fluids)

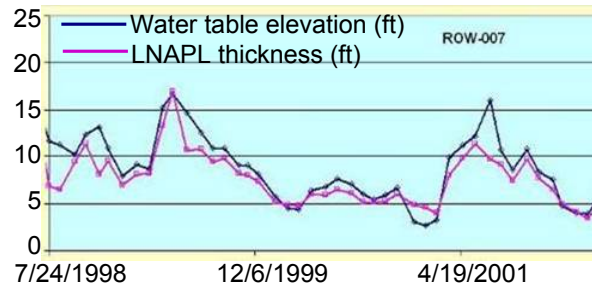


In confined conditions, as groundwater increase LNAPL thickness increases. With recharge, water table rise intercepts confining clay and confined conditions develop. Increase in potentiometric surface results in increase in LNAPL thickness. LNAPL forced into the well and floats to top of potentiometric surface.

LNAPL Thickness Vs. Potentiometric Surface Elevation (Confined)




Conceptual Challenges – Confined

From log for CAS-GB-07

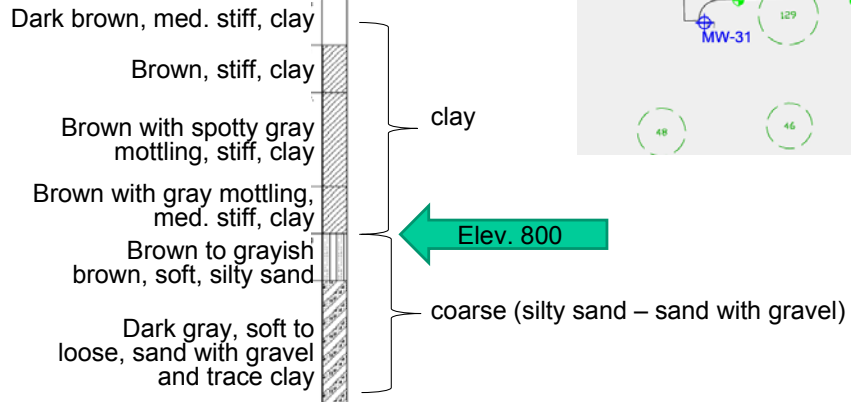


Location of CAS-GB-07 relative to MW-31

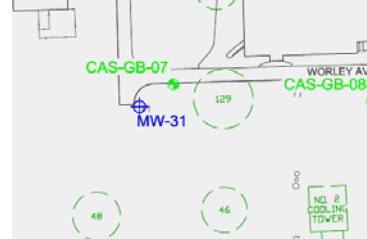

Shown here and the next slide is a detailed example of the unconfined LNAPL that transitions to confined conditions (conceptually depicted on slide 53). Note the coarse grained soils below elevation 800 in the boring log and Clay (fine grained soils above)

LNAPL Thickness Vs. Potentiometric Surface Elevation

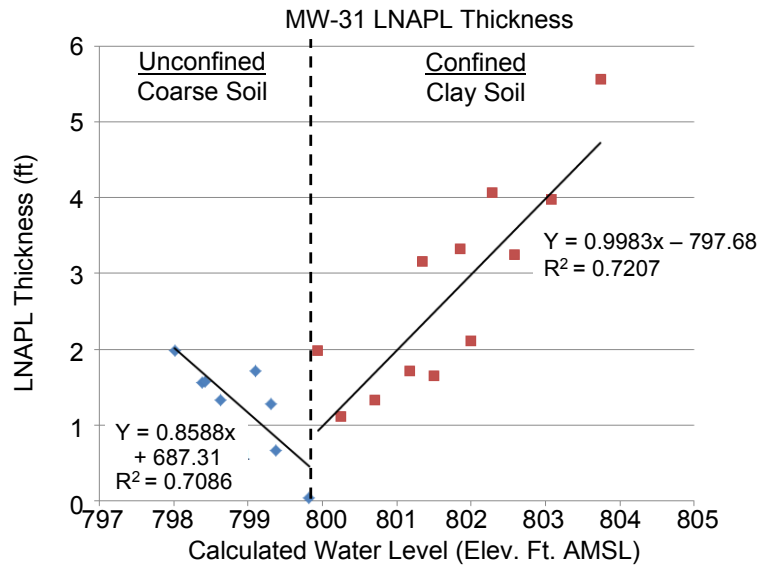


Left Hand Side: Water table in gravel (unconfined condition), LNAPL moves up and down with water table fluctuations, with inverse LNAPL thickness change

Right Hand Side: With recharge, water table rise intercepts confining clay and confined conditions develop. Increase in potentiometric surface results in increase in LNAPL thickness. LNAPL forced into the well and floats to top of potentiometric surface.

Note that the change in trend lines fits very well with the lithology change at elevation 800 ft noted in the previous slide. When the Potentiometric surface is in the coarse grained interval the LNAPL thickness behaves as expected for an unconfined condition. When the Pot Surface is above elev 800 (in the fine grained interval (aquitarde)) the LNAPL thickness behaves as expected for confined conditions.

Well Thickness versus Formation Thickness

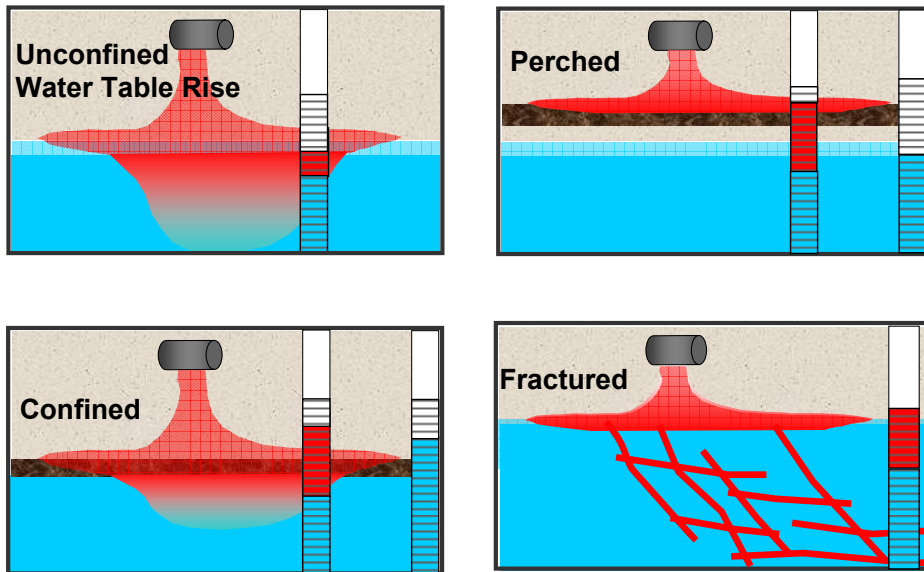

Slide 56

No shark fin saturation in these situations:

Water table rise. Smear zone is thicker than what is in the well


Perched: LNAPL flows into well, which acts like a conduit.

Confined: discussed previously

Once equilibrium is reached, LNAPL thickness in well will equal the continuous LNAPL column formed through connected fractures (macropores). Volume in formation is limited to the fractures.

Macro Pores/Secondary Porosity

- ▶ Macropores (fractures, root holes, etc) - low displacement head (hd)
- ▶ Very low LNAPL volume in the macropore, but LNAPL potentially would still show up in a well

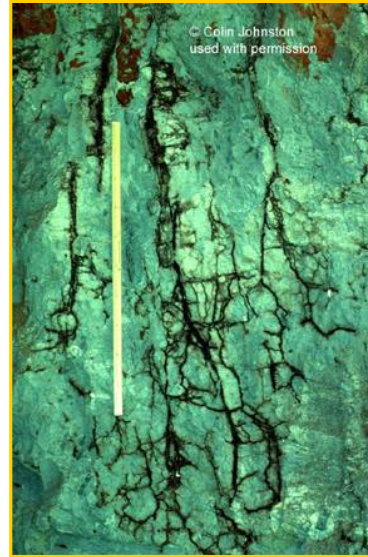


Slide 57

Left photograph: Beaumont clay. LNAPL only in fractures or macropores, seen as white halos. Easy to miss during sampling.

Right photograph: Show the scale of fractures. The yellow bar is a 1-m ruler.

Water Table Rise

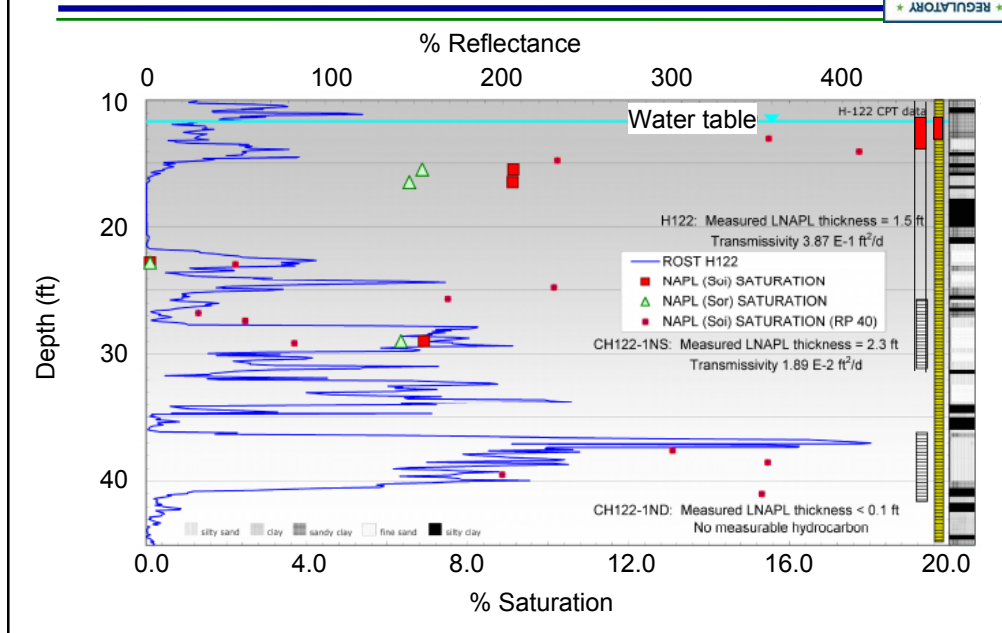

Slide 58

Example of a site where water table rose over time by several feet

Relevant information to focus on in the graph is the ROST signal (blue line) and measured LNAPL thickness in well on the right.

The smear zone extends down to 40 ft bgs where the water table was historically. The measured thickness of LNAPL is 2-3 ft, and is fed from the trapped LNAPL below the water table.

Modeling this without considering the history of the site, well construction etc. would yield a sharkfin that is limited to the top 2-3 ft.


LNAPL Behavior and Distribution



- ▶ LNAPL is distributed at varying saturations vertically (always less than 100%)
- ▶ LNAPL saturation depends on soil type and capillary pressure
- ▶ Under unconfined conditions LNAPL thickness in wells can be correlated to its saturation in the formation
- ▶ Under perched, confined or fractured systems well thickness cannot be used to predict LNAPL saturations or impacted thickness in the formation
- ▶ LNAPL thickness and response to water level can be different for different aquifer systems

Section 4: How LNAPL Moves

- ▶ Section 1: LNAPL definitions and concerns about LNAPL
- ▶ Section 2: How LNAPL enters soil and aquifers
- ▶ Section 3: How LNAPL distributes vertically
- ▶ Section 4: How LNAPL moves

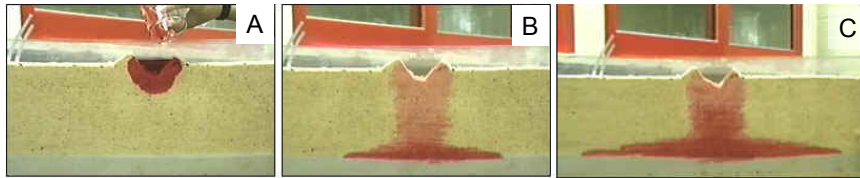

Modified from Schwille, 1988

No associated notes.

Common (mis) Perceptions about LNAPL




- ▶ LNAPL enters the pores just as easily as groundwater
- ▶ You can recover all LNAPL
- ▶ All the pores in an LNAPL plume are filled with LNAPL
- ▶ LNAPL floats on the water table or capillary fringe like a pancake and doesn't penetrate below the water table
- ▶ Thickness in the well is exaggerated by a factor of 4, 10, 12, etc.
- ▶ LNAPL thickness in a well is always equal to the formation thickness
- ▶ If you see LNAPL in a well it is mobile and migrating
- ▶ LNAPL plumes spread due to groundwater flow
- ▶ LNAPL plumes continue to move over very long time scales



Slide 61

Misconception because common assumption is LNAPL pore entry is analogous to that of water. LNAPL and groundwater are generally similar, but there are some differences/considerations that should be accounted for during multi-phase flow:, e.g., relative permeability and pore entry pressure. These are discussed later in this presentation.

LNAPL Management Considerations

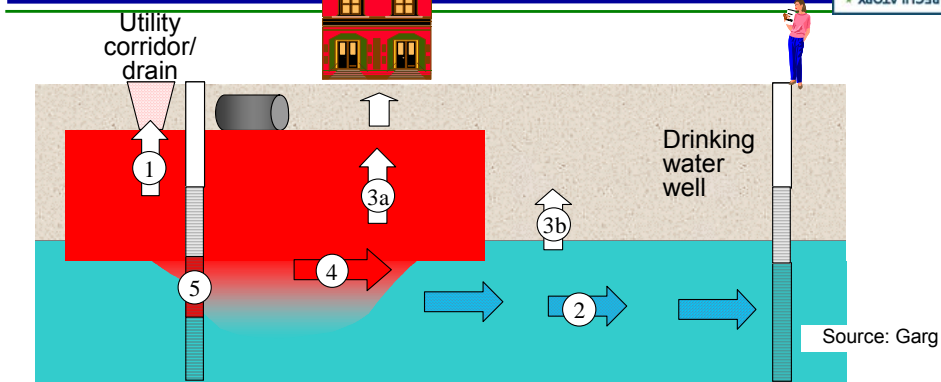

Source: Garg

LNAPL emergency issues when LNAPL in the ground	LNAPL considerations when LNAPL in the ground (typically addressed by regulations)	Additional LNAPL considerations when LNAPL in wells (sometimes addressed by regulations)
<p>① Vapor accumulation in confined spaces causing explosive conditions <i>Not shown</i> - Direct LNAPL migration to surface water <i>Not shown</i> - Direct LNAPL migration to underground spaces</p>	<p>② Groundwater (dissolved phase) ③a LNAPL to vapor ③b Groundwater to vapor <i>Not shown</i> - Direct skin contact</p>	<p>④ LNAPL potential mobility (offsite migration, e.g. to surface water, under houses) ⑤ LNAPL in well (aesthetic, reputation, regulatory)</p>

Before considering how LNAPL moves, it is helpful to consider broader considerations for management of LNAPL and the regulatory context for LNAPL mobility.

We begin with LNAPL emergency issues described in left panel, which include safety issues due to explosion and direct contact with LNAPL. In the middle panel, the vapour and groundwater pathways are highlighted. These are common risk pathways that are addressed by most state and federal regulations. The right panel addresses the additional considerations when LNAPL is present in wells, which is potential LNAPL mobility or other aspects that may be relevant due to presence of LNAPL in wells, such as aesthetic considerations, reputation or liability. The focus of the subsequent slides is the fourth point, which is LNAPL mobility. Although many regulatory frameworks have general provisions based on LNAPL presence in wells, such as recovery of LNAPL to the extent practicable, there are few regulations that address LNAPL mobility in detail. In part, our goal here today is to present the science to enable such regulations to be developed.


Notes on potential revisions:

Change title to "LNAPL Management Considerations"

LNAPL emergency issues is typically addressed in regulations. My experience is that virtually all regulations have general prohibitions and cautions respecting factors given.

Replace "evaluated using std. regs) with "typically addressed by regulations".

Potentially Mobile Fraction of the LNAPL Distribution

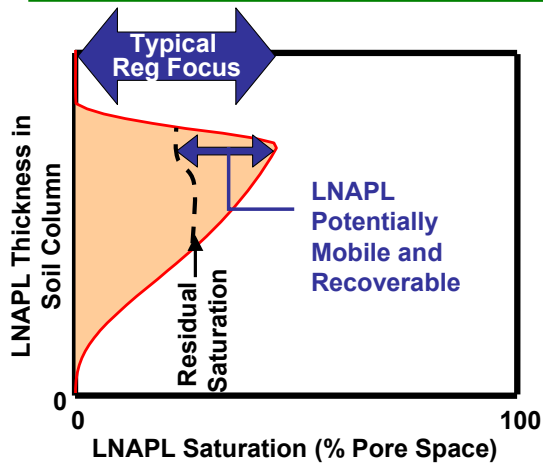

Source: Garg

LNAPL mobility is the additional consideration due to exceeding residual saturation

Key Point: LNAPL potentially mobile only if the saturation exceeds residual saturation

As previously discussed, the LNAPL saturation will vary in the soil column. While the typical regulatory focus addresses the whole spectrum of issues associated with LNAPL, the LNAPL mobility is the additional consideration due to exceeding residual saturation.

The key point is the LNAPL is potentially mobile only if the saturation exceeds residual saturation

Darcy's Law for LNAPL and LNAPL Conductivity



- ▶ LNAPL and groundwater co-exist (share pores)
- ▶ In an water/LNAPL system, not just dealing with a single fluid (groundwater or LNAPL)
- ▶ Darcy's Law governs fluid flow
- ▶ Darcy's Law applicable to each fluid (water/LNAPL) independently

Just as Darcy's Law governs the flow of groundwater, it also controls the movement of LNAPL, however, the LNAPL and groundwater co-exist and share pores, so we are not just dealing with characterizing the flow of a single fluid. As will be subsequently shown on slides, Darcy's Law is applicable to each fluid independently.

Darcy's Law for LNAPL


Darcy's Law for water flow: $q = K i$ [1]

Darcy's Law for LNAPL flow: $q_o = K_o i_o$ [2]

► Adjustment to Darcy's Law for LNAPL

$$K_o = k_{ro} k \rho_o g / \mu_o \quad [3]$$

$$K_o = k_{ro} K_w \rho_o \mu_w / (\rho_w \mu_o) \quad [4]$$



k = intrinsic permeability

k_{ro} = relative permeability of LNAPL

g = gravitational coefficient

ρ_o = LNAPL density

ρ_w = density of water

μ_o = LNAPL viscosity

μ_w = water viscosity

i_o = LNAPL table gradient

K_w = saturated hydraulic conductivity

K_o = LNAPL conductivity

Parameter	Parameter Trend	K_o	Effect on LNAPL Flow (q_o)
Relative Permeability of LNAPL (k_{ro})	↑	↑	↑
LNAPL Density (ρ_o)	↑	↑	↑
LNAPL Viscosity (μ_o)	↑	↓	↓

This slide begins with the simple Darcy's Law for fluid flow for both water and LNAPL in equations 1 and 2. For LNAPL, the specific discharge, q subscript o , is a function of the LNAPL conductivity and LNAPL gradient. Equations 3 and 4 are two expressions that relate oil conductivity to permeability. The first equation relates the oil conductivity to the relative permeability of LNAPL, the intrinsic permeability of the porous media, and properties of water. The second equation relates the oil conductivity to the relative LNAPL permeability, saturated hydraulic conductivity and properties of oil and water. These are important equations used by models for predicting LNAPL mobility.

It is also worthwhile exploring how changes in parameters affect the LNAPL flow. An increase in relative permeability of LNAPL increases the oil conductivity and flow rate. The relative permeability of LNAPL varies over many orders of magnitude. Likewise an increase in density also increases the LNAPL flow rate, however, since changes in density are small, this is not an important parameter with respect to mobility. The third variable, viscosity, is of moderate importance, with an opposite trend shown where an increase in viscosity decreases the LNAPL flow rate.


LNAPL Conductivity is Also Dependent on Viscosity of the LNAPL

$$q_o = K_o i_o$$

$$K_o = k k_{ro} \rho_o g / \mu_o$$

$$= k_{ro} K_w \rho_o \mu_w / \rho_w \mu_o$$

Terms defined in
previous slide

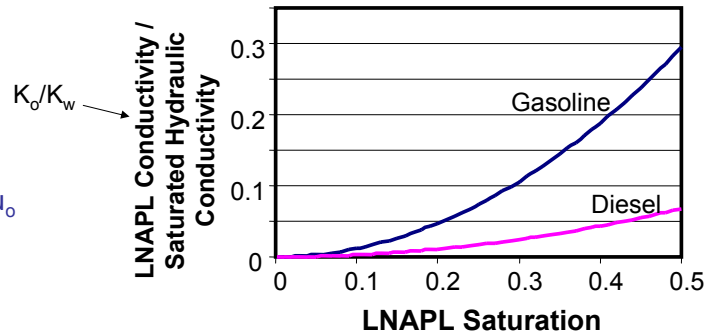

Key Points: For a given LNAPL saturation,
higher LNAPL viscosity
→ lower LNAPL conductivity


For a given LNAPL viscosity,
higher LNAPL saturation
→ higher LNAPL conductivity

This slide illustrates both how the LNAPL saturation and viscosity influence the ratio of the LNAPL conductivity to saturated hydraulic conductivity. First, an increase in saturation results in an increase in this ratio, or in other words, the LNAPL mobility. The viscosity is indirectly evaluated through model predictions for two petroleum products with different viscosities. For example, for a saturation of 0.3, the LNAPL mobility as expressed by this ratio is about 4 times higher for gasoline than diesel. While there are typically distinct differences between different petroleum products, it is important to note that there may be mixtures of different products at sites and also weathering that occurs over time, which may change viscosity. For this reason, the viscosity of the LNAPL is typically measured when evaluating mobility.

To summarize these relationships, the LNAPL conductivity decreases as the viscosity increases. For LNAPL saturation, the LNAPL conductivity increases as the saturation increases.

Relative Permeability (k_r)

Definition: Porous media ability to allow flow of a fluid when other fluid phases are present

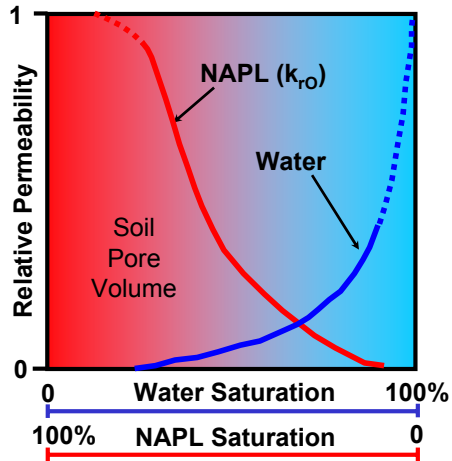


Consider water/LNAPL in soil:

- ▶ Saturation \rightarrow relative permeability
- ▶ Relative permeability of soil for water or LNAPL at 100% saturation = 1
- ▶ Relative permeability for both LNAPL and water decreases rapidly as saturation declines from 100%
- ▶ Below residual saturation, flow decreases exponentially
- ▶ Relative permeability of LNAPL (k_{rO}) and relative permeability of water inversely related

The relative permeability is the ability of fluid to flow in porous media when other phases are present. For LNAPL, the saturation is related to the relative permeability as shown in the figure. At 100% saturation, the relative permeability is one. As the saturation decreases from 100%, the relative permeability for both LNAPL and water decrease rapidly, with the decrease following an exponential trend. The relative permeability of LNAPL and water are inversely related.

Relative Permeability (continued)

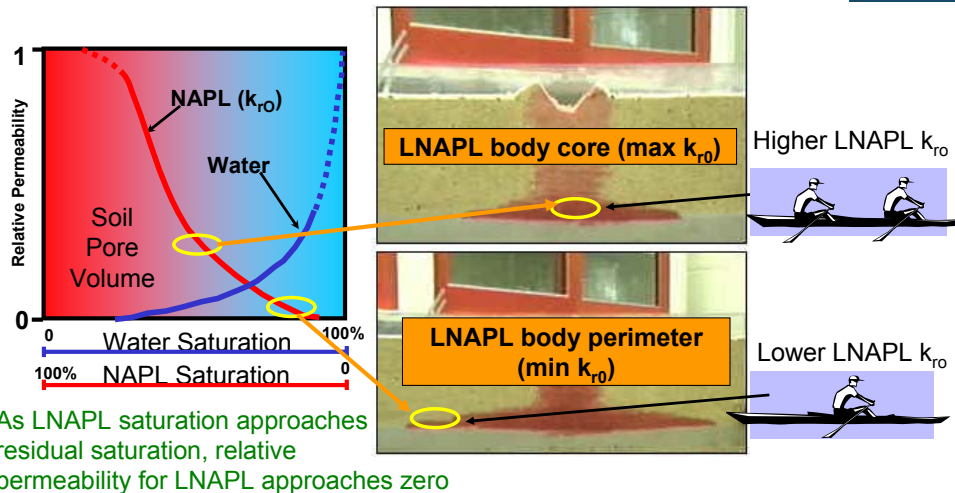


Key Point: Core of LNAPL body - highest saturations → highest relative permeability → highest flow rate

This slide relates the relative permeability to saturations that one would expect in different parts of the LNAPL plume. In the core of the plume, the LNAPL saturation is higher, which also results in higher relative permeability to LNAPL. Near the edges of the LNAPL plume, the LNAPL saturation will be lower, and consequently the relative permeability will also be less. We have shown the contrast in relative permeability to be analogous to rowers, relative to the core of the plume there are two rowers, whereas near the perimeter of the plume there is only one rower. If we move even further to the edge of the plume there may be no mobility or no rower

Not shown in this slide is the influence of the LNAPL gradient. During earlier time periods after a release, there is greater mounding of LNAPL and higher gradient. As the LNAPL spreads laterally, the LNAPL gradient will decrease.

Relative Permeability (continued)

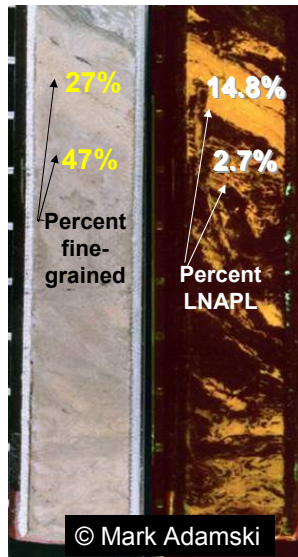


Higher LNAPL saturation in coarser-grained soil

- ▶ LNAPL relative permeability is not uniformly distributed – soil heterogeneity controls
- ▶ Higher LNAPL saturation in coarser-grained soil
 - higher relative permeability
 - higher potential LNAPL flow rate

The purpose on this slide is to illustrate how soil heterogeneity will influence LNAPL flow. The photograph show a soil core that is split in half, on the left, the core shows the contrast between coarse-grained soil that is lighter coloured, and finer-grained soil, that is darker. On the right is the fluorescence, where the brightest orange region shows the highest LNAPL content, which coincides with the coarser-grained soil, as expected. The key point of this slide is that coarser-grained layers will have higher LNAPL saturation, higher relative permeability and higher potential LNAPL flow rate.

Displacement Head and LNAPL Migration

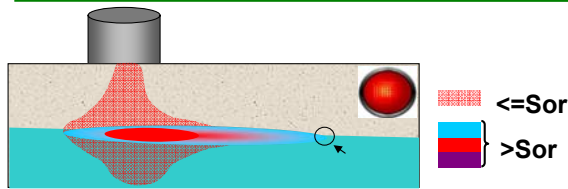

- ▶ There is a minimum LNAPL displacement entry pressure or displacement head (h_{dn}) that must be overcome for LNAPL to migrate into water-wet pores - this minimum displacement head can be related to the thickness of LNAPL in the formation
- ▶ If LNAPL thickness is less than this minimum thickness, then no LNAPL movement into water-wet pores occurs
- ▶ Field scale observations of LNAPL are consistent with LNAPL bodies that stop spreading laterally due to displacement entry pressure
- ▶ A quantitative understanding of the displacement head and relationship to LNAPL thickness thresholds in monitoring wells is an area of active research and debate

Key Point: Water acts as a capillary barrier against continued LNAPL spreading

While we have been focussing on LNAPL conductivity and movement, it is important to come back to concepts relating to displacement head and LNAPL migration.

An important concept is that there is a minimum LNAPL displacement entry pressure or head that must be overcome in order for LNAPL to move into water-wet pores.

This displacement head in turn can be related to the thickness of LNAPL in the formation.

If the LNAPL thickness is less than minimum entry head, then no LNAPL flow occurs.


As indicated earlier a model based on LNAPL spreading that is controlled by the displacement entry pressure is consistent with field scale observations.

There are quantitative models, such as those developed by Dr. Randall Charbeneau for the American Petroleum Institute, that have been developed that link the minimum thresholds for mobility to thickness of LNAPL in wells, however, this is still an active area of research and debate.

Again the key point is that water acts as a capillary barrier against continued LNAPL spreading.


LNAPL Plumes

Conceptual LNAPL saturation conditions after LNAPL plume spreading stops

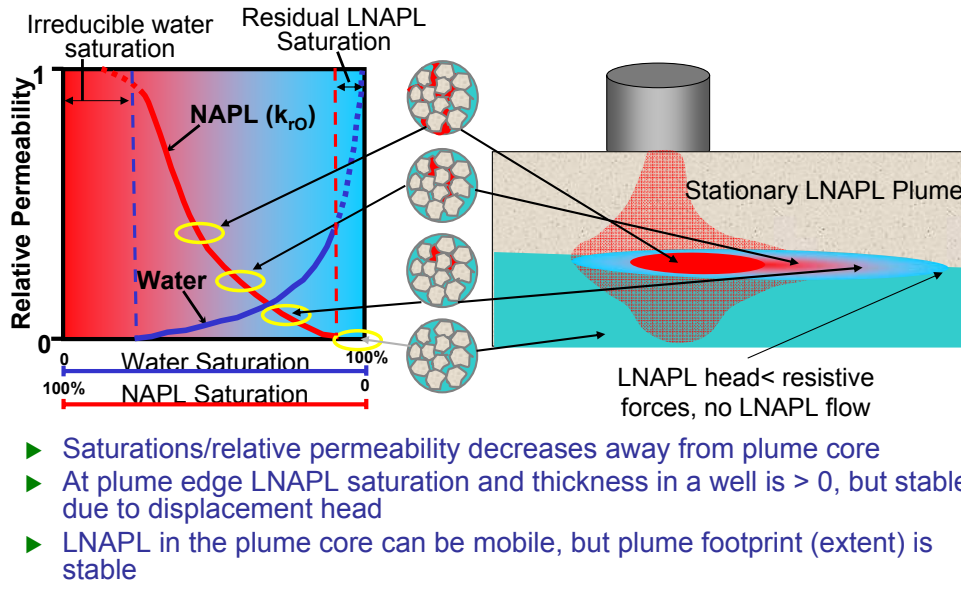

This slide brings together the two concepts we have been discussing. On the left is the relative permeability relationship, indicating potential mobility for NAPL when saturation is greater than residual saturation. On the right is the conceptual model that shows how the spreading of the LNAPL is controlled by the resistive forces at the perimeter of the plume. The key point is that potential LNAPL mobility within the core of the plume does not necessarily equate to spreading of LNAPL or an expanding LNAPL footprint.

LNAPL Mobility

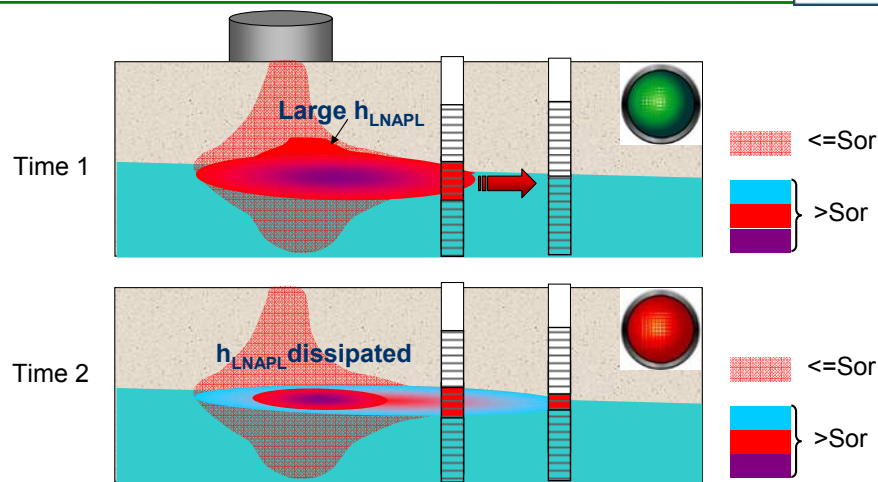

Key Point: Once the LNAPL head dissipates, it is no longer sufficient to overcome LNAPL entry pressure and LNAPL movement ceases

The timescale over which there will be LNAPL mobility is also an important consideration. The next two slides summarize the concept that there must be a minimum LNAPL head to overcome the LNAPL displacement entry pressure for LNAPL mobility to occur. At early times after a LNAPL release, there is a large LNAPL head and LNAPL movement occurs. At later times, the head has dissipated and there is not long sufficient head to overcome the displacement entry pressure.

Case Examples



What we have observed at sites

- ▶ LNAPL can initially spread at rates higher than the groundwater flow rate due to large LNAPL hydraulic heads at time of release
- ▶ LNAPL can spread opposite to the direction of the groundwater gradient (radial spreading)
- ▶ After LNAPL release is abated, LNAPL bodies come to be stable configuration generally within a short period of time


The next three slides present case studies on LNAPL mobility. Before looking at specific cases, the general observations are that:

LNAPL can initially spread at rates higher than groundwater flow

LNAPL can spread in the opposite direction to groundwater flow direction due to mounding of LNAPL and radial spreading, and finally,

LNAPL bodies tend to come to stable configurations in relatively short time periods


Case Example 1: Simulated LNAPL Release

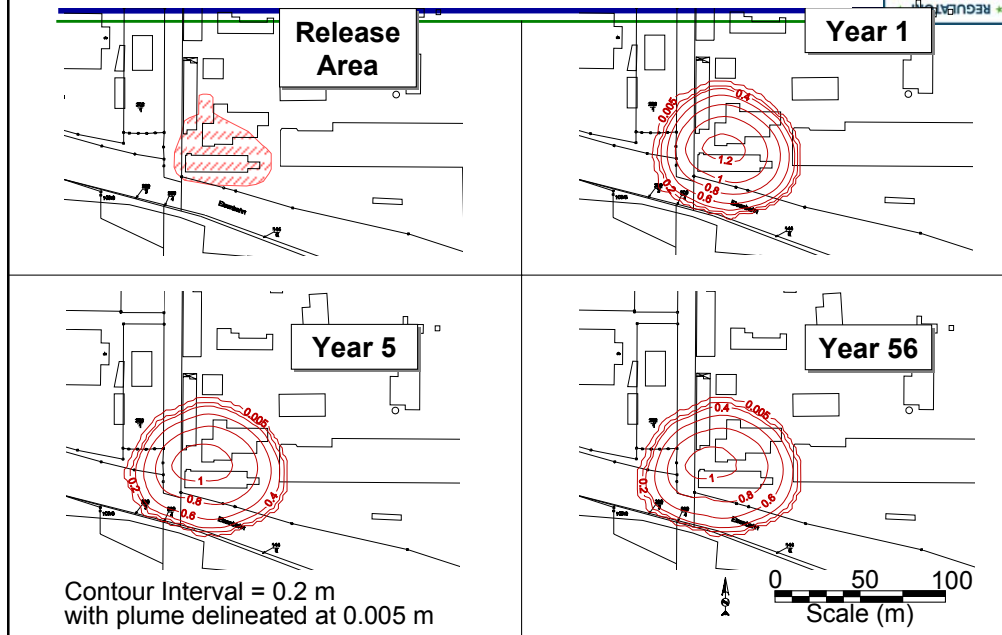

The first case example shows the simulated migration of a LNAPL release involving about 1,500 m³ of product over a 56 year period. The images represent the predicted well-product thickness measurements. While the growth in the plume from release to Year 1 is clear, the plume appears to grow only slightly over the next 55 years.

For these simulations, a relatively small groundwater gradient was assumed and the groundwater is predicted to move about 600 meters. In contrast, the LNAPL has spread over an approximately 100 m.

Case Example 2: LNAPL Release and Spreading

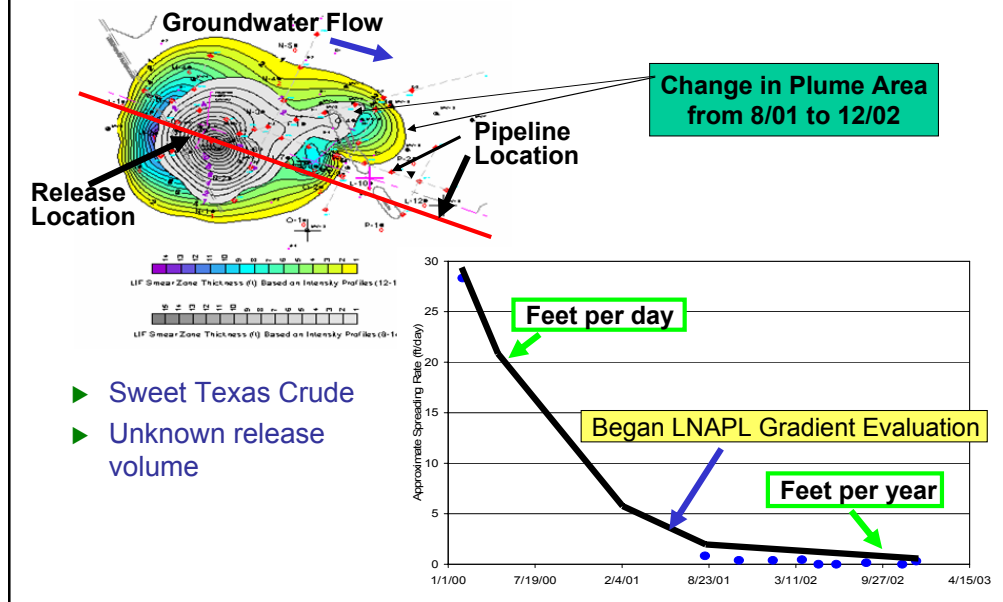

The second case example is measured data at a pipeline site crude oil release. The upper left figure is a plan showing the spread in the LNAPL thickness over time. The grey area represents the spread between when the release occurred, in February 2000 and October 2001. The blue and yellow zone represents the additional spreading between October 2001 and December 2002. An important characteristic shown in this figure is that the LNAPL spreads radially from the release location and not only in the direction of groundwater flow.

The figure in the lower right shows the estimated rate of LNAPL spreading, which initially was on the order of a few feet per day, and after about a year and half, decreased to few feet per year.

After December 2002, no additional LNAPL was observed to migrate in sentinel wells surrounding the release area. The LNAPL plume is considered to be functionally stable, which refers to a state or condition where there is some vertical and lateral redistribution of LNAPL, but where additional movement is relatively minor and should not impact ongoing plume management objectives.

The dissolved concentrations in groundwater are also monitored routinely and indicate that the dissolved plume is also reaching a stabilized footprint around the LNAPL smear zone. The dissolved plume behavior can be used to infer LNAPL stability, if dissolved plume is stable or shrinking, the LNAPL is unlikely to be expanding.

Lines of Evidence of LNAPL Footprint Stability



1. Monitoring results (assumes adequate well network)
 - Stable or decreasing thickness of LNAPL in monitoring wells
 - Sentinel wells outside of LNAPL zone remain free of LNAPL
 - Stable or shrinking dissolved phase plume
2. Calculated LNAPL Velocity
 - Estimate K_o from:
 - Baildown test at peripheral wells
 - Measured LNAPL thickness, soil capillary parameters, model that assumes static equilibrium (e.g., API Interactive LNAPL Guide)
 - Measure i_o
 - $q_o = K_o i_o$
 - $v_o = q_o / (\phi S_o)$
 - ← Porosity * LNAPL saturation ~ typically 0.2 to 0.03

The emerging approach for evaluating LNAPL mobility is a multiple lines of evidence approach. The intent here is to provide an overview of this approach, the technical regulation that the ITRC LNAPL team is developing will provide additional details.

The first line of evidence and typically the primary and most important one are monitoring results. Assuming that there is an adequate monitoring network and sufficient temporal data, there are several factors that are evidence for a stable footprint, which are a stable or decreasing thickness of LNAPL in monitoring wells, sentinel wells outside of the LNAPL zone that remain free of LNAPL and a shrinking dissolved phase plume

The second line of evidence involves calculating the potential LNAPL velocity using Darcy's Law. The key parameter, which is the LNAPL conductivity, may be estimated from bail down tests, or from the measured LNAPL thickness, soil capillary parameters and model that assumes static equilibrium. The API Interactive LNAPL Guide is one tool that may be used to estimate the LNAPL velocity using this model. Some guidance documents have suggested that the calculated LNAPL velocity be compared to a de minimus LNAPL velocity below which one would generally not be concerned with LNAPL mobility. It is important to recognize that use of Darcy's Law would be precluded for some site conditions, such as a fractured bedrock site.

New emerging method for estimating LNAPL tracer dilution method.

Lines of Evidence of LNAPL Footprint Stability (continued)



3. Measured LNAPL thickness less than a threshold thickness in wells required to invade water-wet soil pores (displacement entry pressure model)
4. Recovery rates
 - Decreasing LNAPL recovery rates
5. Age of the release
 - Timing of release (if known)
 - Weathering indicators
6. Field and laboratory tests
 - Centrifuge tests and measured saturation and residual saturation values

The third line of evidence is to compare the measured LNAPL thickness to a calculated threshold LNAPL thickness in wells required to invade water-wet pores based on the displacement entry pressure model. There is still some debate on the use of the this model as indicated earlier in this training.

The fourth line of evidence are recovery rates observed as LNAPL is removed from a well. Although not directly correlated to LNAPL mobility, declining recovery rates would generally indicate reduced potential for LNAPL mobility.

The fifth line of evidence is the age of the release, when known. If a relatively long time has transpired since the release there is reduced potential for mobility due to smearing of LNAPL within soil and weathering of LNAPL through dissolution, biodegradation and volatilization.

The sixth line of evidence are field and laboratory tests. While these are indirect indicators, if for example measured LNAPL saturations are less than residual saturation obtained from centrifuge test, then there will likely be little potential for LNAPL mobility. However, these tests are approximate and, for example, centrifuge tests would tend to over-predict mobility.

Section 4 Summary: LNAPL Migration Dynamics



(mis) Perceptions: LNAPL plumes can spread indefinitely
LNAPL plumes spread due to groundwater flow

- ▶ Potential LNAPL velocity may be estimated from Darcy's Law
- ▶ The LNAPL relative permeability is a key parameter for LNAPL flow, and is a function of the LNAPL saturation
- ▶ The displacement pore entry pressure must be exceeded for LNAPL to enter a water-filled pore
- ▶ Once the LNAPL release stops, LNAPL near the water table will eventually cease to spread as the resistive forces in soil balance the driving forces (LNAPL head) in the LNAPL pool
 - Smaller releases will stop migrating sooner
 - Continuing releases will result in a growing plume
- ▶ LNAPL plume may be stable at the LNAPL fringe, but there may be local re-distribution within the LNAPL core

As this point, I would like to summarize what we have learned about LNAPL migration. First of all, potential LNAPL velocity may be estimated from Darcy's Law. A key parameter for LNAPL mobility is relative permeability, which is a function of saturation.

It is important to recognize that once LNAPL release stop, LNAPL near the water table will eventually cease to spread at resistive forces. Smaller releases will stop migrating sooner, however continuing releases will result in a growing plume.

While a LNAPL plume or body may be stable, there may be redistribution within the LNAPL core and varying thickness of LNAPL observed in wells.

Summary of LNAPL Basics



- ▶ LNAPLs are not distributed vertically in a “pancake” fashion, but are distributed according to vertical equilibrium as a multiphase
- ▶ LNAPL saturations are not uniform, but are controlled by soil heterogeneity
- ▶ The specific volume of LNAPL within soil will be greater in coarse than fine grained soil for a given LNAPL thickness
- ▶ As the LNAPL saturation increases, the relative permeability and potential LNAPL velocity also increases

No associated notes.

Summary of LNAPL Basics (continued)



- ▶ The pressure exerted by LNAPL must exceed the displacement pore entry pressure for LNAPL to enter a water-filled pore
- ▶ Measurable LNAPL thickness in a well does not necessarily indicate mobility, LNAPL plumes generally come to stable configurations over relatively short periods of time

- ▶ LNAPL 3-part Internet-based training
 - Part 1 – basic principles for LNAPL distribution and mobility
 - Part 2 – LNAPL assessment, LNAPL Conceptual Site Model, and LNAPL recovery evaluation
 - Part 3 – identify the LNAPL concerns or risks and set remedial objectives and technology-specific remediation goals and performance metrics
- ▶ 2-day classroom training: Light Nonaqueous-Phase Liquids (LNAPLs): Science, Management, and Technology

Coming in LNAPL Training Part 2: LNAPL Characterization and Recoverability – Improved Analysis - Do you know where the LNAPL is and can you recover it? Part 2 addresses LNAPL characterization and site conceptual model development as well as LNAPL recovery evaluation and remedial considerations. Specifically, Part 2 discusses key LNAPL and site data, when and why those data may be important, and how to get those data. Part 2 also discusses how to evaluate LNAPL recoverability

Thank You for Participating



- ▶ 2nd question and answer break
- ▶ Links to additional resources
 - <http://www.cluin.org/conf/itrc/iuLNAPL/resource.cfm>
- ▶ Feedback form – *please complete*
 - <http://www.clu-in.org/conf/itrc/iuLNAPL/feedback.cfm>

Need confirmation of your participation today?

Fill out the feedback form and check box for confirmation email.

Links to additional resources:

<http://www.cluin.org/conf/itrc/iuLNAPL/resource.cfm>

Your feedback is important – please fill out the form at:

<http://www.clu-in.org/conf/itrc/iuLNAPL/feedback.cfm>

The benefits that ITRC offers to state regulators and technology developers, vendors, and consultants include:

- ✓ Helping regulators build their knowledge base and raise their confidence about new environmental technologies
- ✓ Helping regulators save time and money when evaluating environmental technologies
- ✓ Guiding technology developers in the collection of performance data to satisfy the requirements of multiple states
- ✓ Helping technology vendors avoid the time and expense of conducting duplicative and costly demonstrations
- ✓ Providing a reliable network among members of the environmental community to focus on innovative environmental technologies

How you can get involved with ITRC:

- ✓ Join an ITRC Team – with just 10% of your time you can have a positive impact on the regulatory process and acceptance of innovative technologies and approaches
- ✓ Sponsor ITRC's technical team and other activities
- ✓ Use ITRC products and attend training courses
- ✓ Submit proposals for new technical teams and projects